
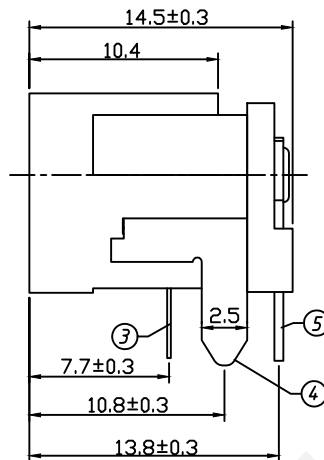


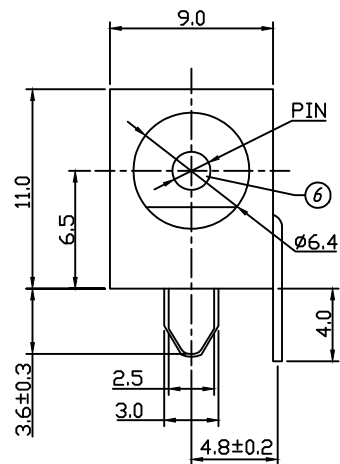

SPECIFICATION

Rated Load:DC 24V5A

Contact resistance:30mΩ, max

Insulation resistance:100MΩ, min


Withstand Voltage:AC500V

Actuating Force:3-20N


Life:5000 cycles

Operating Temperature:-30℃-70℃


PCB Layout Top View

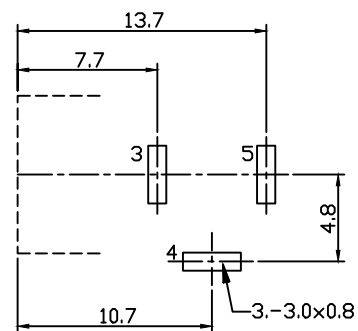

PIN	Ø2.0	Ø2.5
APPD		

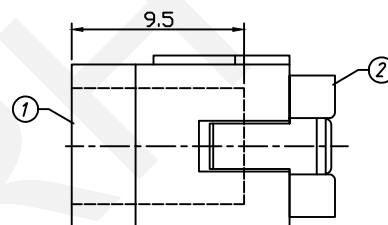

SCHEMATIC

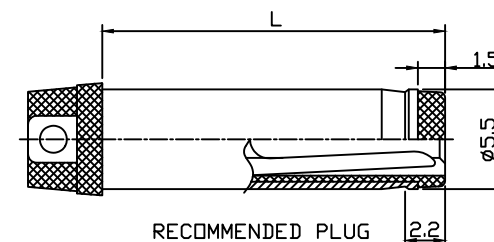

NO.	Description	QTY	Material	Plating
1	Housing	1	PA9T	---
2	Cover	1	PA9T	---
3	Spring Piece	1	SUS301	Ag-Plating
4	Curve Piece	1	Brass	Ag-Plating
5	Flat Foot	1	Brass	Ag-Plating
6	Pin	1	Brass	Ni-Plating

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

30V 2A DC Jack DIP

THIRD ANGLE PROJECTION



RHTAYDC-004