

Parameter

Housing:PBT&30%Glass Fiber(UL94V-0)

Contact:Female:Phosphor Bronze

Plating:Ag/Ni Plated

Operating Temperature:-55°C~+105°C

Contact Resistance:8m(ohm)Max.

Insulator Resistance:10⁹M(ohm)Min.


Current Rating:15 AMP

Withstanding Voltage:AC 3100V For 1 Minute

Insertion Force: 90N max

Withdrawal Force: 0.2N/pin min

All Holes

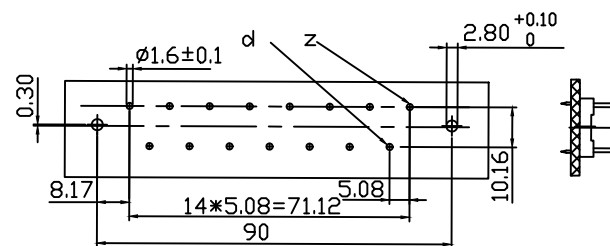

Recommended P.C.B. Layout

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

Vertical Female Type H15 Connectors

THIRD ANGLE PROJECTION



RHTAY25-3-159-12-30