



Recommended P.CB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

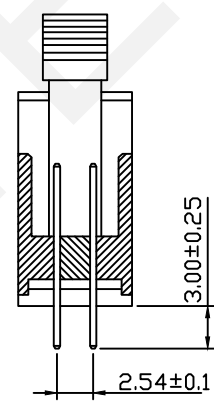

Material:
Housing: PA6T,UL94V-0
Contact: Brass
Plating: Au or Sn over Ni
Electrical Characteristics:
Rated Current: 1.0AMP
Contact Resistance: 20MΩ Max
Withstand Voltage: 500V AC/DC
Insulator Resistance: 1000MΩ Min
Mechanical
Operating Temperature:-40°C~+105°C
Max.Processing Temp:230°C For 30-60
Seconds (260°C For 10 Seconds)

Order Information:
RHTAY01D-XX-S-B-□
Box Header Series
01D:1.27mm Pitch
XX-No.of10~100 pins
Type:S-Straight pin
R-Right Angle Pin T-SMT
Color:B-Black G-Gray
Material:NONE=PA6T C=LCP

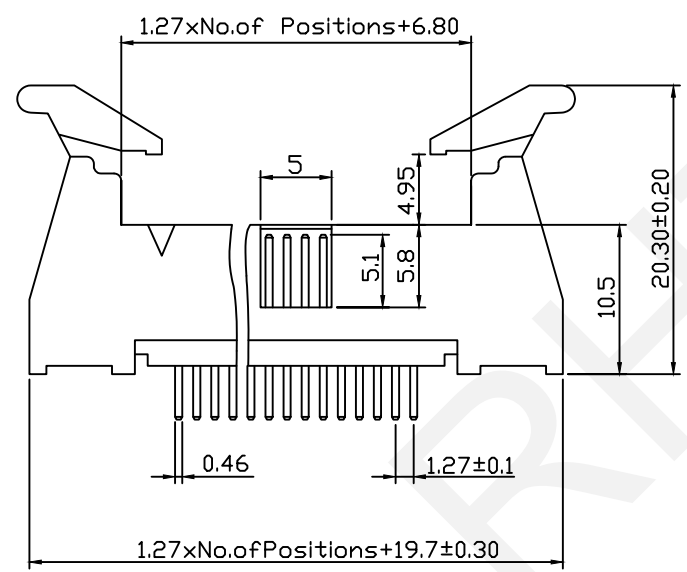


NINGBO RHT ELECTRONIC CO.,LTD



UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

1.27x2.54mm Pitch Box Header Connector



THIRD ANGLE PROJECTION



RHTAY01D-XX-S-B-□

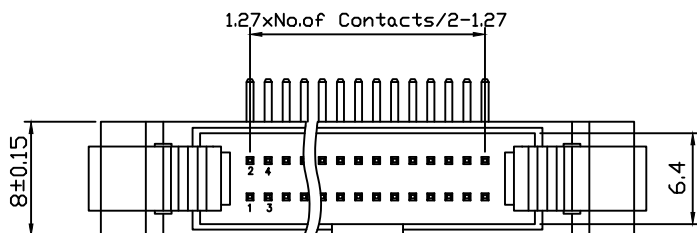

Recommended P.CB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

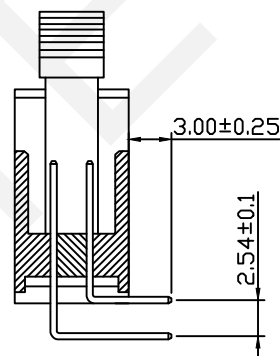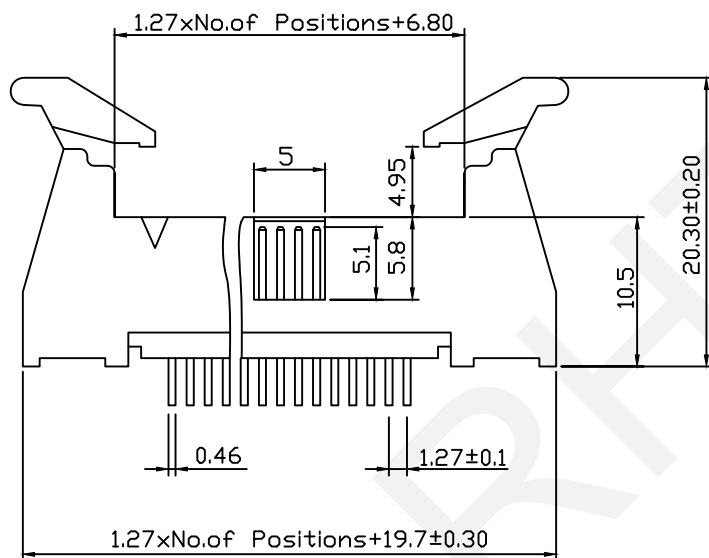

Material:

Housing: PA6T,UL94V-0

Contact: Brass

Plating: Au or Sn over Ni

Electrical Characteristics:

Rated Current: 1.0AMP

Contact Resistance: 20MΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40°C~+105°C

Max.Processing Temp:230°C For 30-60

Seconds (260°C For 10 Seconds)

Order Information:

RHTAY01D-XX-R-B-□

Box Header Series

01D:1.27mm Pitch

XX-No.of10~100 pins

Type:S-Straight pin

R-Right Angle Pin T-SMT

Color:B-Black G-Gray

Material:NONE=PA6T C=LCP



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.27x2.54mm Pitch Box Header Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY01D-XX-R-B-□