




Recommended P.CB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Material:
Housing:LCP+30%G.F UL94V-0,Color:Black
Contact:Brass,1u" MIN Gold Plating Over All
30u" MIN Nickel Underplating Over All
Electrical Characteristics:
Rated Current:2.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulator Resistance: 1000MΩ Min
Mechanical
Operating Temperature:-40°C~+105°C
Max,Processing Temp:230°C for 30-60
Seconds (260°C for 10 seconds)

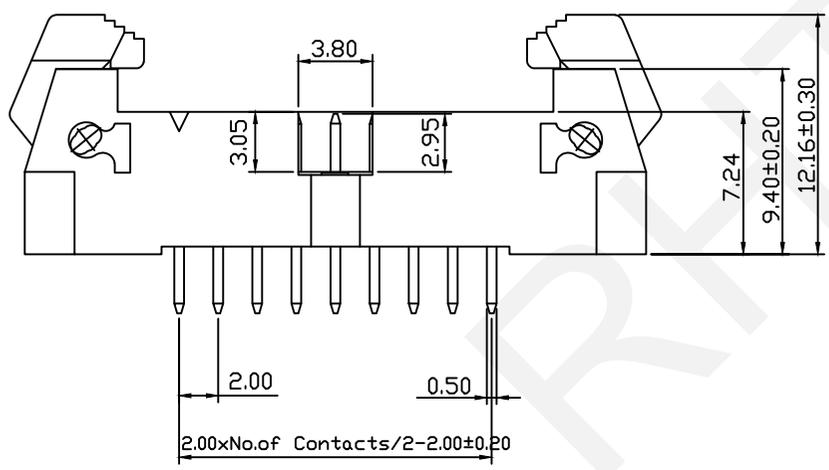

Order Information

RHTAY01BB-XX-S-B-C

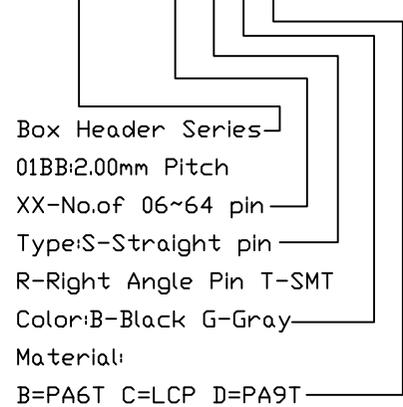

Box Header Series
01BB:2.00mm Pitch
XX-No.of 06~64 pin
Type:S-Straight pin
R-Right Angle Pin T-SMT
Color:B-Black G-Gray
Material:
B=PA6T C=LCP D=PA9T




NINGBO RHT ELECTRONIC CO.,LTD



UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

2.00mm Pitch Box Header Connector

THIRD ANGLE PROJECTION





RHTAY01BB-XX-S-B-C

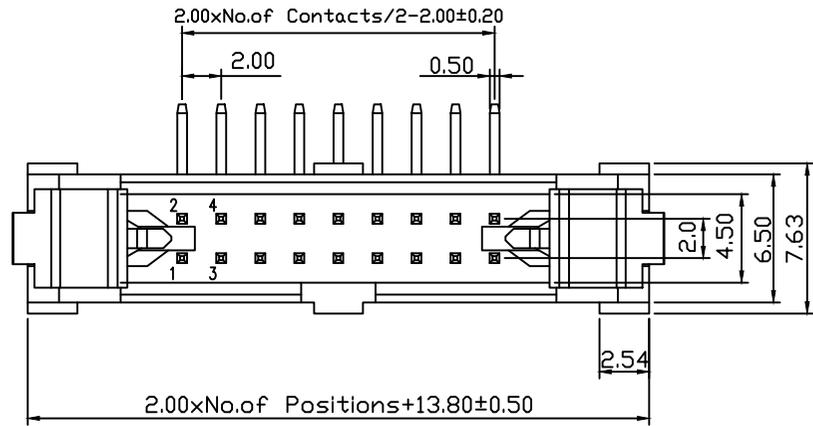

Recommended P.CB Layout<Top Side>
(PCB BOARD TOLERANCE±0.05)

Material:
Housing:LCP+30%G.F UL94V-0,Color:Black
Contact:Brass,1u" MIN Gold Plating Over All
30u" MIN Nickel Underplating Over All
Electrical Characteristics:
Rated Current:2.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulator Resistance: 1000MΩ Min
Mechanical
Operating Temperature:-40°C~+105°C
Max,Processing Temp:230°C for 30-60
Seconds (260°C for 10 seconds)

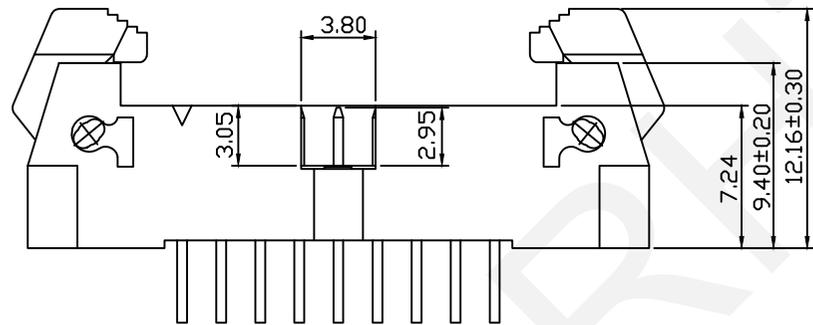

Order Information

RHTAY01BB-XX-R-B-C

Box Header Series
01BB:2.00mm Pitch
XX-No.of 06~64 pin
Type:S-Straight pin
R-Right Angle Pin T-SMT
Color:B-Black G-Gray
Material:
B=PA6T C=LCP D=PA9T




NINGBO RHT ELECTRONIC CO.,LTD



UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

2.00mm Pitch Box Header Connector

THIRD ANGLE PROJECTION



RHTAY01BB-XX-R-B-C

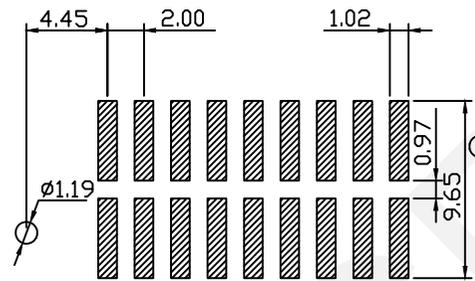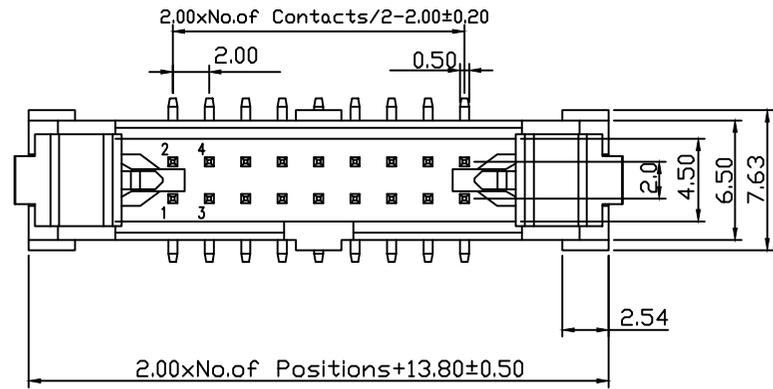

Recommended P.CB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Material:
 Housing:LCP+30%G.F UL94V-0,Color:Black
 Contact:Brass,1u" MIN Gold Plating Over All
 30u" MIN Nickel Underplating Over All
 Electrical Characteristics:
 Rated Current:2.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulator Resistance: 1000MΩ Min
 Mechanical
 Operating Temperature:-40°C~+105°C
 Max,Processing Temp:230°C for 30-60
 Seconds (260°C for 10 seconds)

T3=With Post T=Without Post

Order Information

RHTAY01BB-XX-T-B-C-T

Box Header Series

01BB:2.00mm Pitch

XX-No.of 06~64 pin

SMT:T=Without Post

T3=With Post




Color:B-Black G-Gray

Material:

B=PA6T C=LCP D=PA9T

Packing:

T=Tube P=Tube+Cap R=Reel+Cap

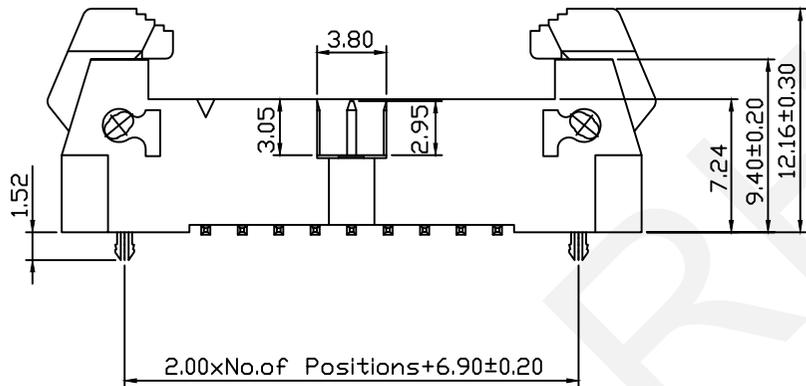

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

2.00mm Pitch Box Header Connector

THIRD ANGLE PROJECTION



RHTAY01BB-XX-T-B-C-T



NINGBO RHT ELECTRONIC CO.,LTD