
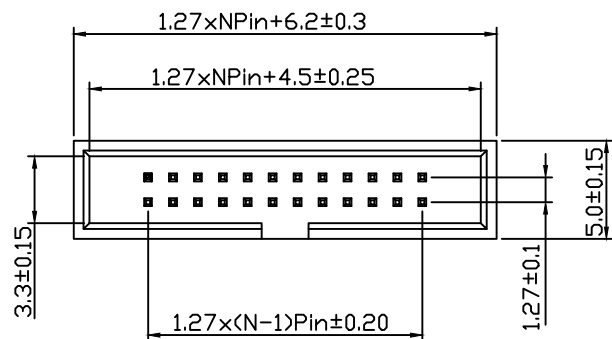



Recommended P.CB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

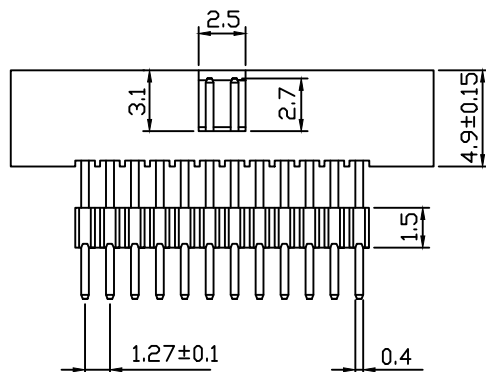

Dimension Antitheses List		
ITEM	PC	PB
Standard	2.3	---
Alternate	---	---

Material:
Housing:PA6T Or LCP ,UL94V-0
Contact:Brass,
Plating:Gold Plated

Electrical Characteristics:
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulator Resistance: 1000MΩ Min

Mechanical
Operating Temperature:-40°C~+105°C
Max,Processing Temp: 230°C for 30-60seconds
(260°C for 10 seconds)

Order Information

RHTAY02CA-XX-S-B-PBxPC-□

Box Header Series

02CA:1.27mm Pitch

XX-No.of 06~100 pin

Type:S-Straight pin

T-SMT

Color:B-Black G-Gray

Size:PBxPC

Material:NONE=PA6T

C=LCP D=PA9T



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

1.27x1.27mm Pitch Box Header Connector

THIRD ANGLE PROJECTION



RHTAY02CA-XX-S-B-PBxPC-□

