


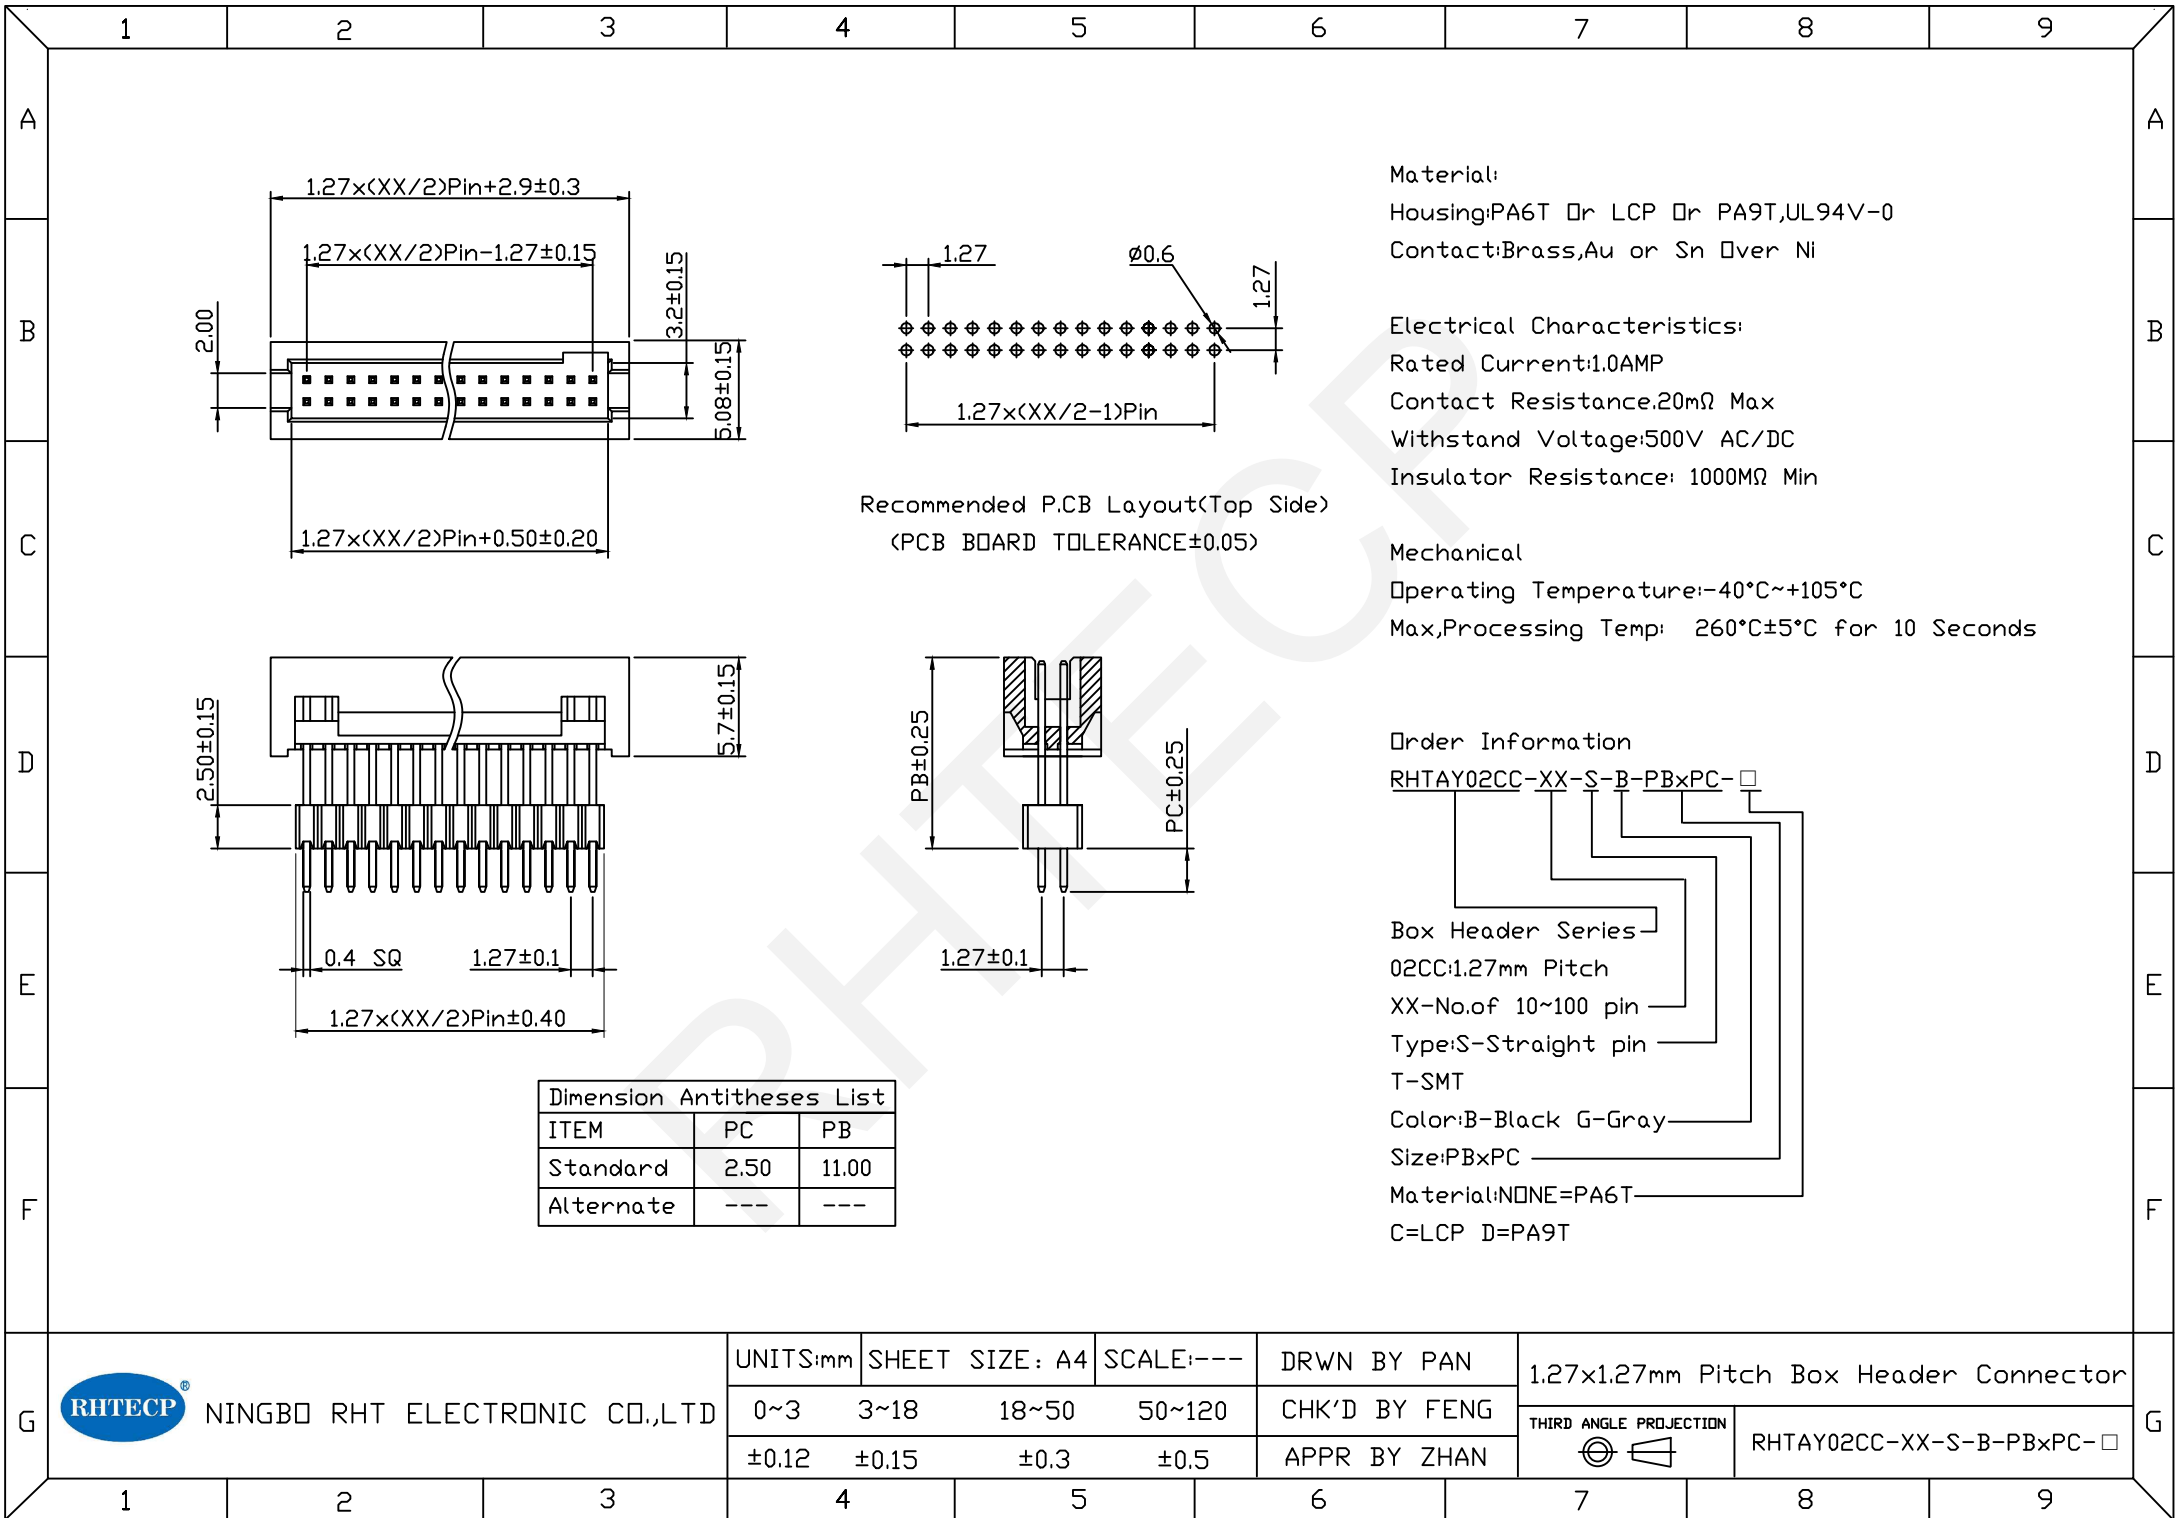

Material:
Housing:PA6T Or LCP Or PA9T,UL94V-0
Contact:Brass,Au or Sn Over Ni

Electrical Characteristics:
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulator Resistance: 1000MΩ Min

Mechanical
Operating Temperature:-40°C~+105°C
Max,Processing Temp: 260°C±5°C for 10 Seconds

Order Information
RHTAY02CC-XX-S-B-PBxPC-□
Box Header Series
02CC:1.27mm Pitch
XX-No.of 10~100 pin
Type:S-Straight pin
T-SMT
Color:B-Black G-Gray
Size:PBxPC
Material:NONE=PA6T
C=LCP D=PA9T

Dimension Antitheses List		
ITEM	PC	PB
Standard	2.50	11.00
Alternate	---	---




NINGBO RHT ELECTRONIC CO.,LTD


UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

1.27x1.27mm Pitch Box Header Connector

THIRD ANGLE PROJECTION



RHTAY02CC-XX-S-B-PBxPC-□

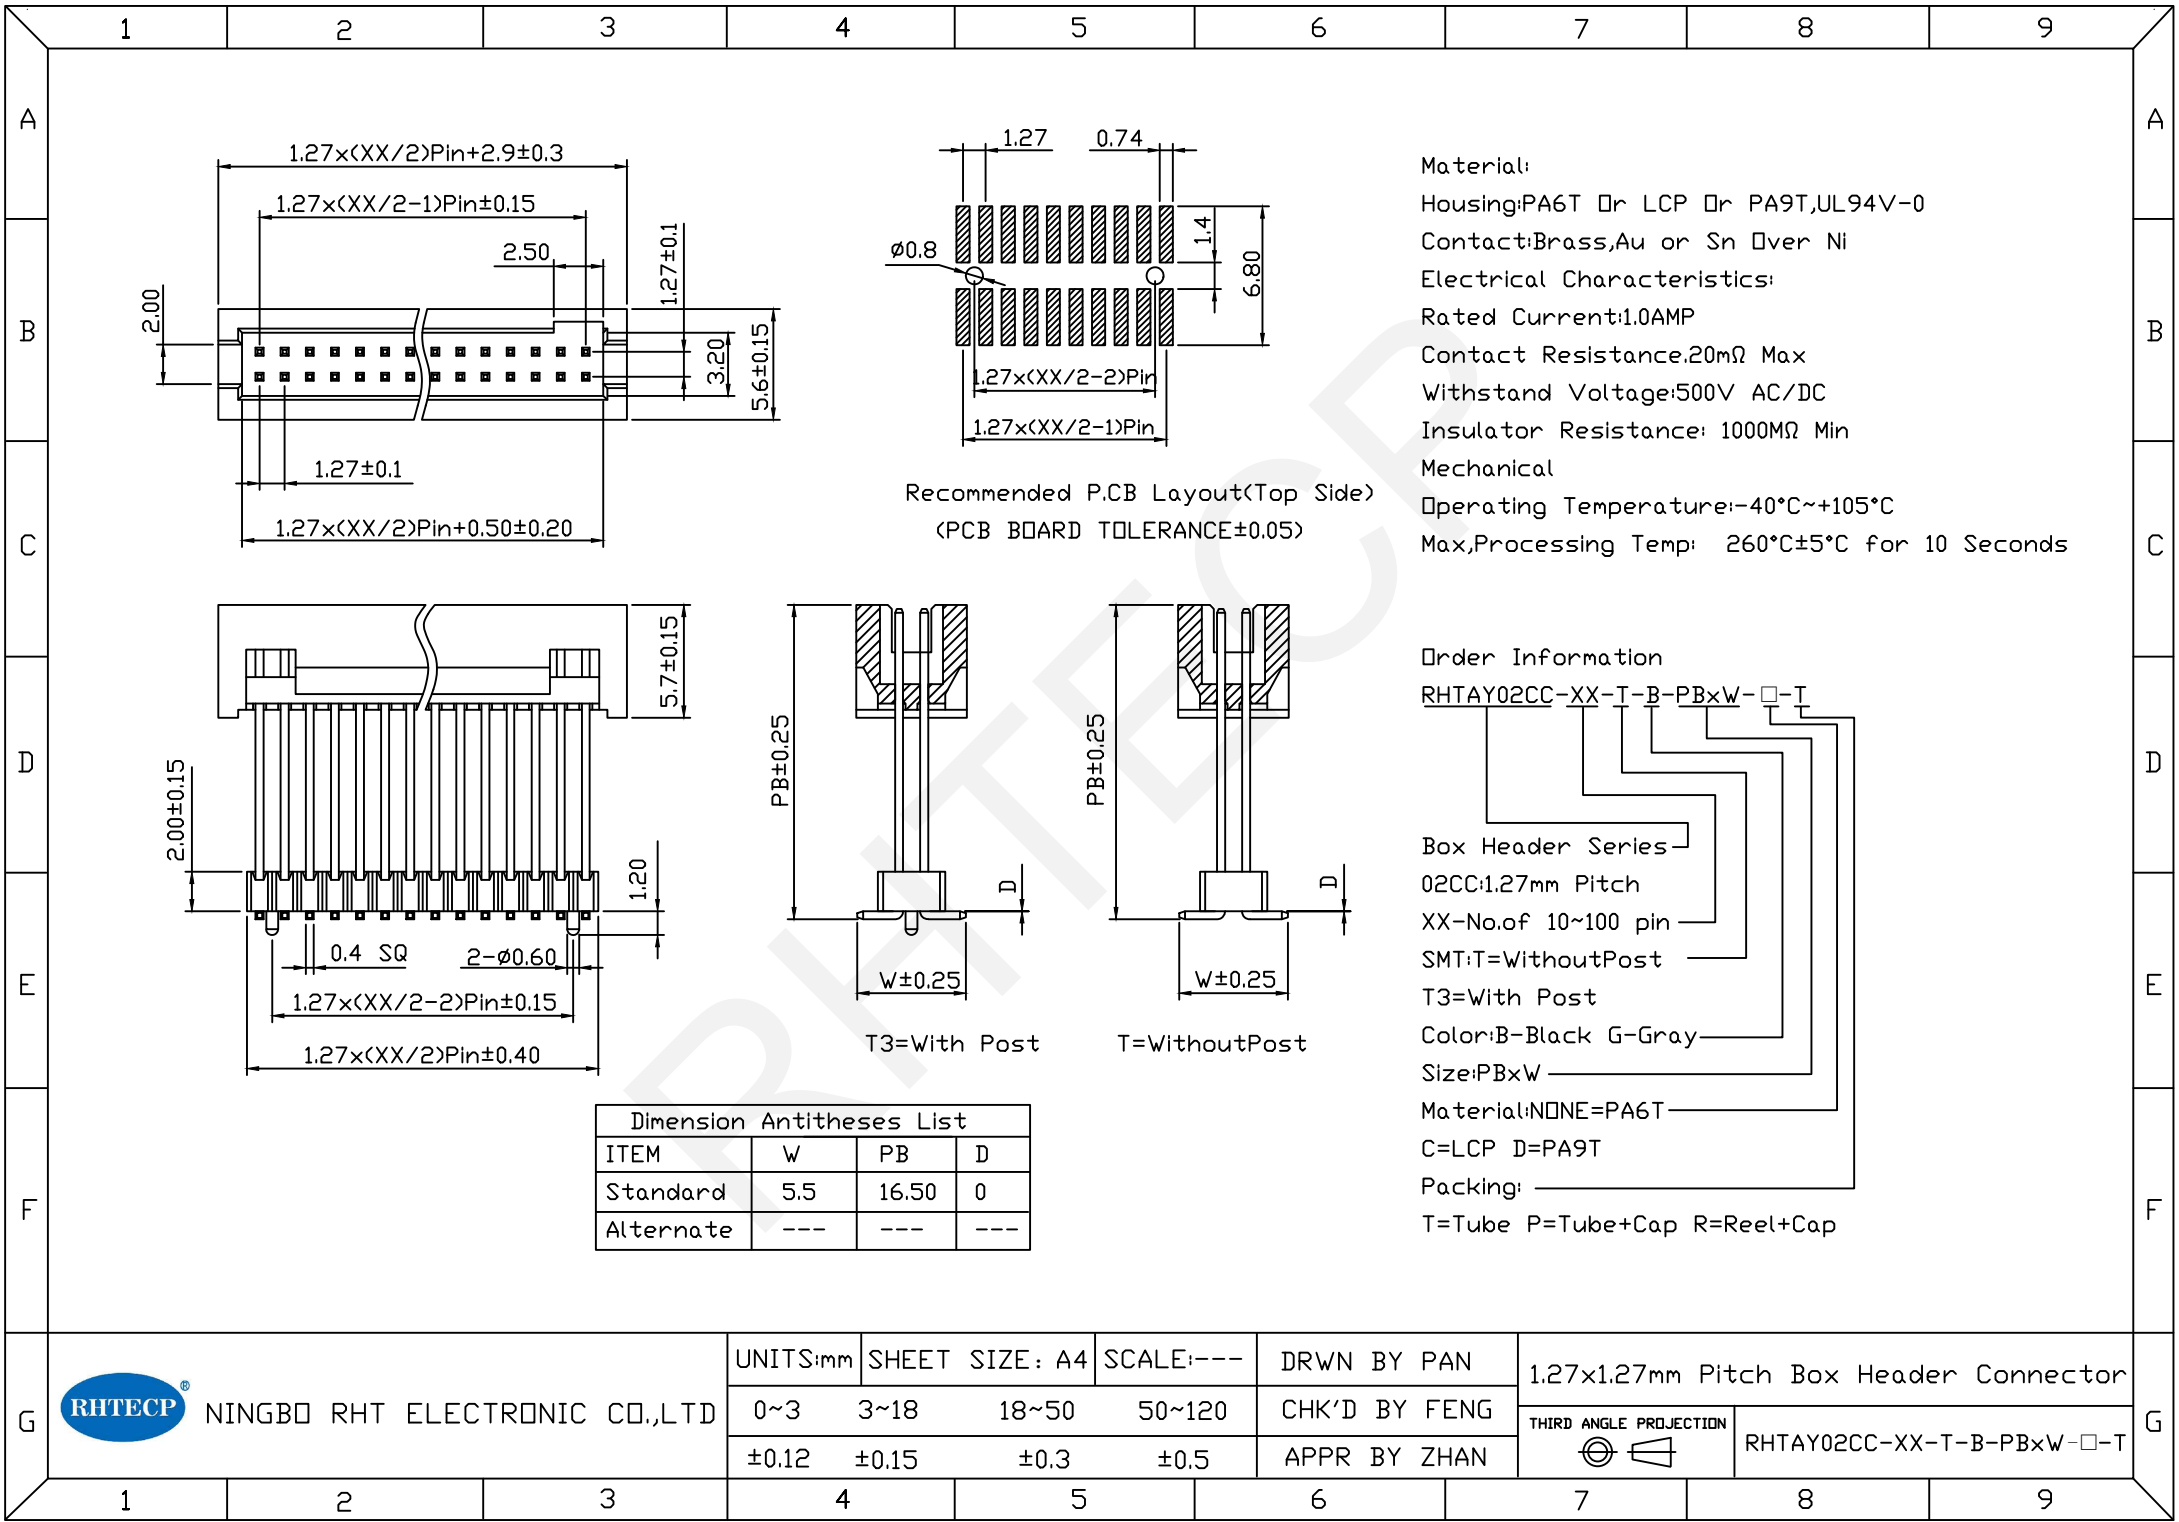

Material:
Housing:PA6T Or LCP Or PA9T,UL94V-0
Contact:Brass,Au or Sn Over Ni
Electrical Characteristics:
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulator Resistance: 1000MΩ Min
Mechanical
Operating Temperature:-40°C~+105°C
Max,Processing Temp: 260°C±5°C for 10 Seconds

Order Information
RHTAY02CC-XX-T-B-PBxW-□-T

Box Header Series
02CC:1.27mm Pitch
XX-No.of 10~100 pin
SMT:T=WithoutPost
T3=With Post
Color:B-Black G-Gray
Size:PBxW
Material:NONE=PA6T
C=LCP D=PA9T
Packing: _____
T=Tube P=Tube+Cap R=Reel+Cap