
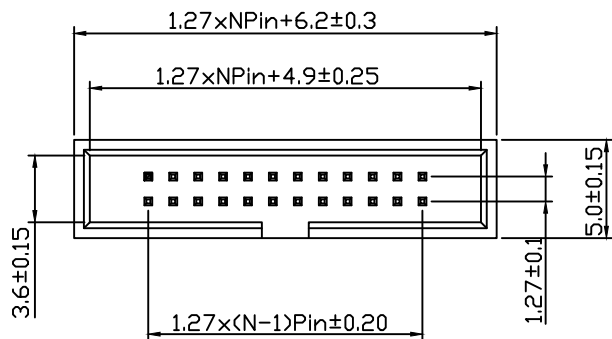



Recommended P.CB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

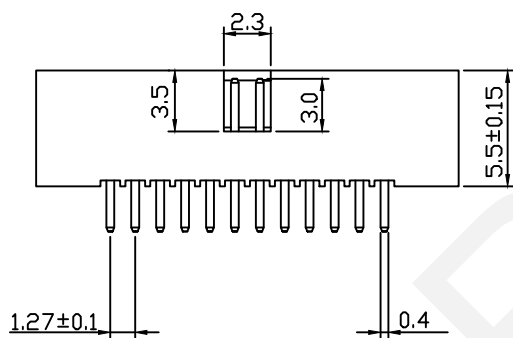

Material:

Housing:PA6T or LCP,UL94V-0

Contact:Brass

Plating:Gold Plated

Electrical Characteristics:

Rated Current:1.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature:-40°C~+105°C

Max,Processing Temp:230°C for 30-60

Seconds (260°C for 10 seconds)

Order Information

RHTAY02CE-XX-S-B-□

Box Header Series

02CE:1.27mm Pitch

XX-No.of 06~100 pin

Type:S-Straight pin

R-Right Angle Pin T-SMT

Color:B-Black G-Gray

Material:NONE=PA6T

C=LCP D=PA9T



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.27x1.27mm Pitch Box Header Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY02CE-XX-S-B-□


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4



5

6



7

8

9

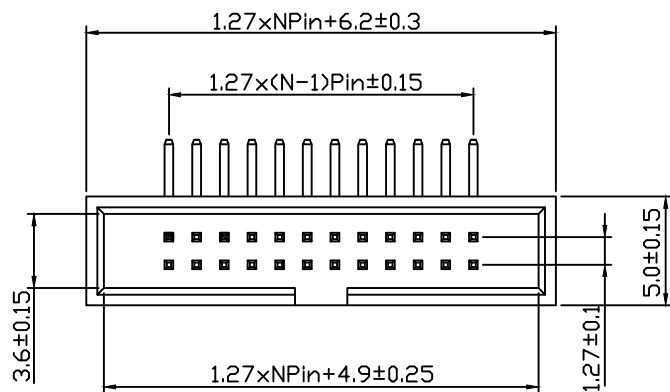

Recommended P.CB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

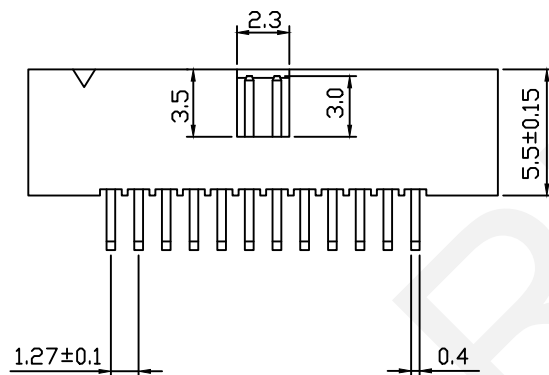

Material:

Housing:PA6T or LCP,UL94V-0

Contact:Brass

Plating:Gold Plated

Electrical Characteristics:

Rated Current:1.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature:-40°C~+105°C

Max,Processing Temp:230°C for 30-60

Seconds (260°C for 10 seconds)

Order Information

RHTAY02CE-XX-R-B-□

Box Header Series

02CE:1.27mm Pitch

XX-No.of 06~100 pin

Type:S-Straight pin

R-Right Angle Pin T-SMT

Color:B-Black G-Gray

Material:NDNE=PA6T

C=LCP D=PA9T



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.27x1.27mm Pitch Box Header Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY02CE-XX-R-B-□

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4



5

6



7

8

9

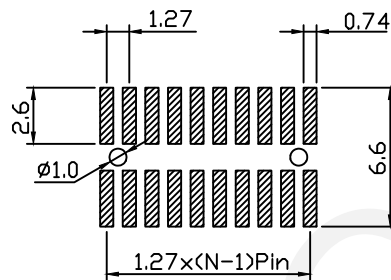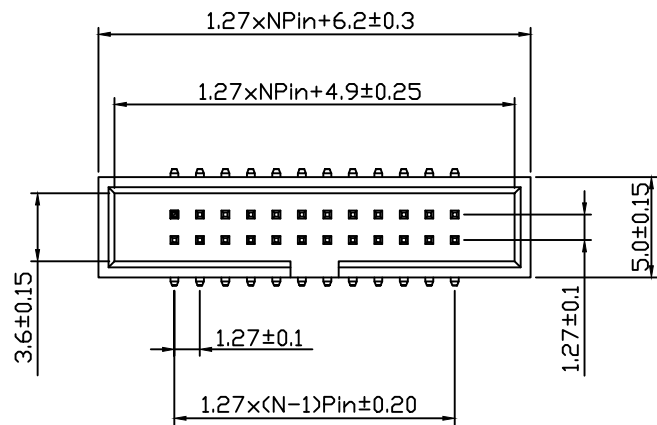

Recommended P.CB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

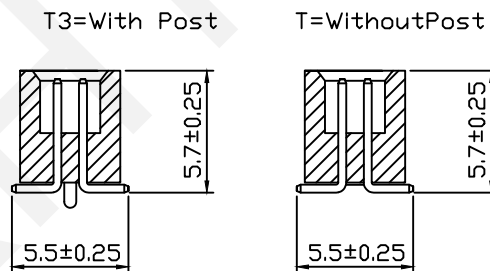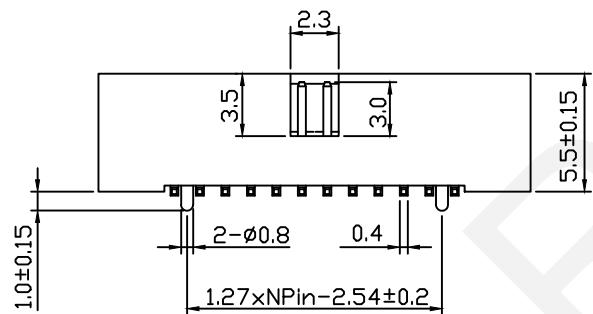

Material:
Housing:PA6T or LCP,UL94V-0
Contact:Brass
Plating:Gold Plated
Electrical Characteristics:
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulator Resistance: 1000MΩ Min
Mechanical
Operating Temperature:-40°C~+105°C
Max,Processing Temp:230°C for 30-60
Seconds (260°C for 10 seconds)

Order Information

RHTAY02CE-XX-T-B-□-T

Box Header Series
02CE:1.27mm Pitch
XX-No.of 06~100 pin
SMT:T=WithoutPost
T3=With Post
Color:B-Black G-Gray
Material:NONE=PA6T
C=LCP D=PA9T
Packing:
T=Tube P=Tube+Cap R=Reel+Cap



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.27x1.27mm Pitch Box Header Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY02CE-XX-T-B-□-T


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9