
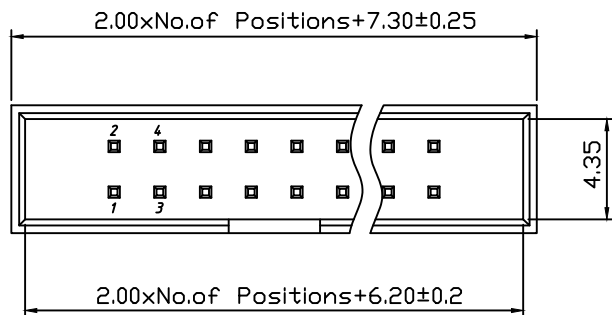
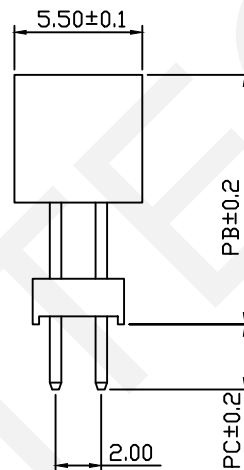


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

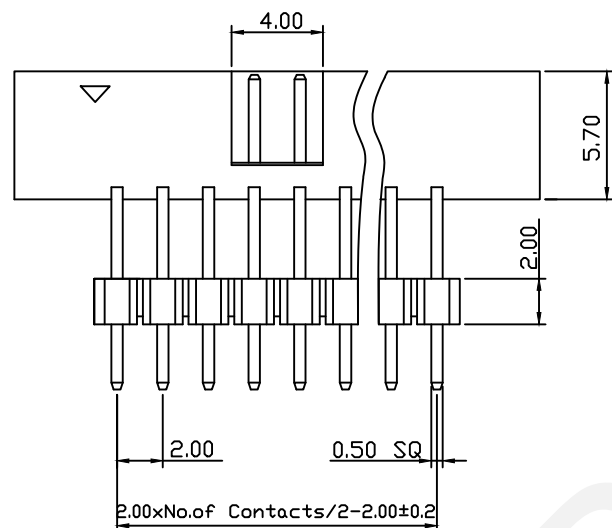

Dimension Antitheses List		
ITEM	PC	PB
Standard	2.80	---
Alternate	---	---

Material:
Housing:PA6T,UL94V-0
Contact:Brass,
Plating:Gold Plated

Electrical Characteristics:
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:400V AC/DC
Insulator Resistance: 800MΩ Min

Mechanical
Operating Temperature:-40°C~+105°C
Max,Processing Temp: 230°C for 30-60seconds
(260°C for 10 seconds)

Order Information

RHTAY02BC-XX-S-B-PBxPC-□

Box Header Series

02BC:2.00mm Pitch

XX-No.of 06~64 pin

Type:S-Straight pin

T-SMT

Color:B-Black G-Gray

Size:PBxPC

Material:NONE=PA6T

A=PBT C=LCP



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5


DRWN BY PAN

CHK'D BY FENG



APPR BY ZHAN

2.00mm Pitch Box Header Connector



THIRD ANGLE PROJECTION



RHTAY02BC-XX-S-B-PBxPC-□

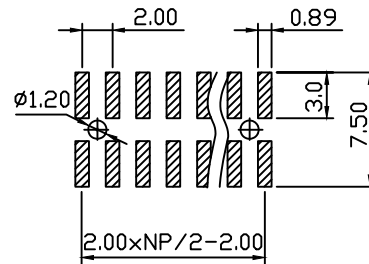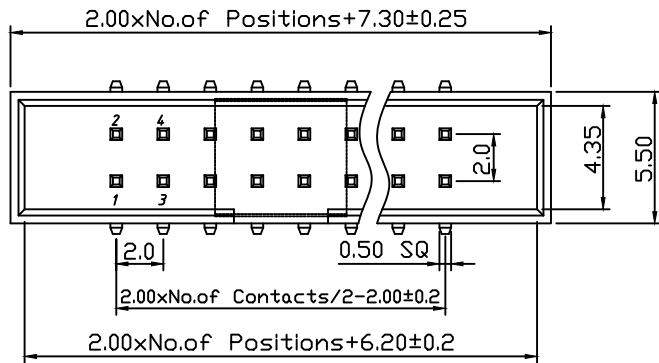

Recommended P.CB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

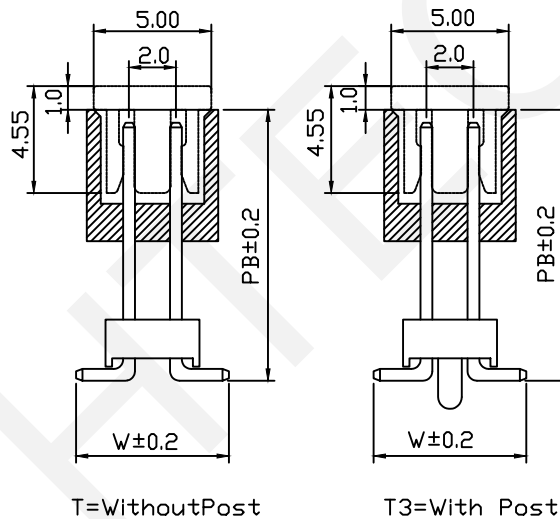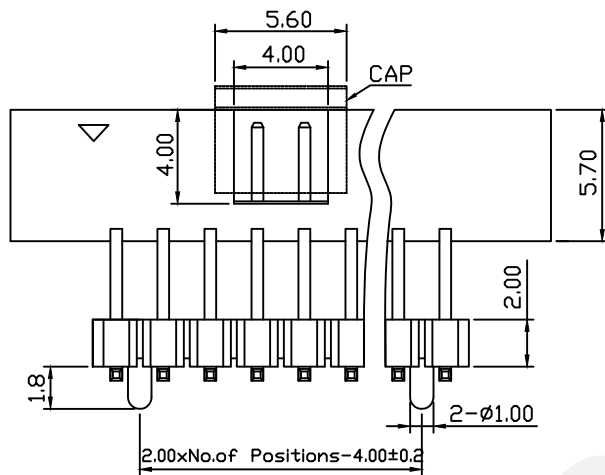

Dimension Antitheses List		
ITEM	W	PB
Standard	6.50	---
Alternate	---	---

Material:
Housing:PA6T ,UL94V-0
Contact:Brass,
Plating:Gold Plated
Electrical Characteristics:
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:400V AC/DC
Insulator Resistance: 800MΩ Min
Mechanical
Operating Temperature:-40°C~+105°C
Max,Processing Temp: 230°C for 30-60seconds
(260°C for 10 seconds)

Order Information
RHTAY02BC-XX-T-B-PBxW-□-T
Box Header Series
02BC:2.00mm Pitch
XX-No.of 06~64 pin
SMT:T=WithoutPost
T3=With Post
Color:B-Black G-Gray
Size:PBxW
Material:NONE=PA6T
A=PBT C=LCP
Packing:
T=Tube P=Tube+Cap R=Reel+Cap



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

2.00mm Pitch Box Header Connector

THIRD ANGLE PROJECTION



RHTAY02BC-XX-T-B-PBxW-□-T