
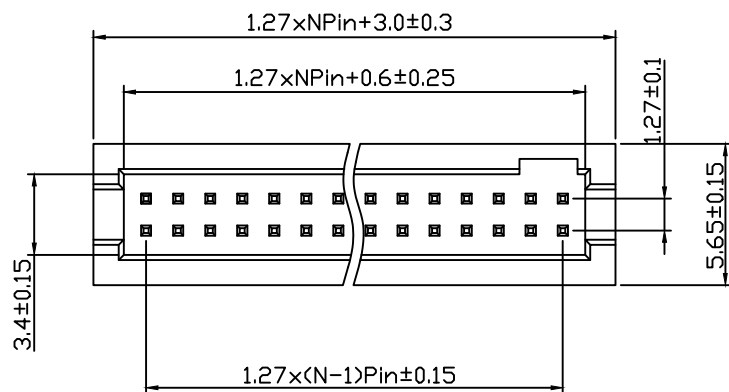



Recommended P.CB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

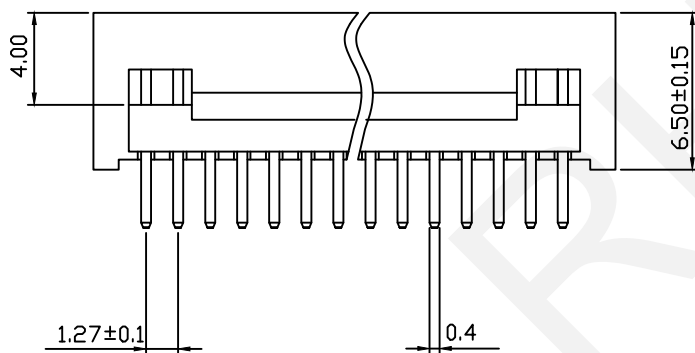

Material:

Housing:PA6T or LCP,UL94V-0

Contact:Brass

Plating:Gold Plated

Electrical Characteristics:

Rated Current:1.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature:-40°C~+105°C

Max,Processing Temp:230°C for 30-60

Seconds (260°C for 10 seconds)

Order Information

RHTAY02CD-XX-S-B-□

Box Header Series

02CD:1.27mm Pitch

XX-No.of 10~100 pin

Type:S-Straight pin

R-Right Angle Pin T-SMT

Color:B-Black G-Gray

Material:NDNE=PA6T

C=LCP D=PA9T



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.27x1.27mm Pitch Box Header Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY02CD-XX-S-B-□


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4



5

6


7

8

9

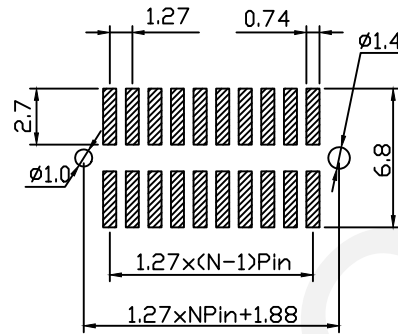
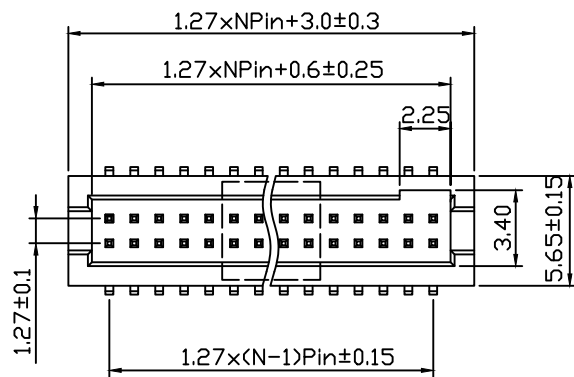


Recommended P.CB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

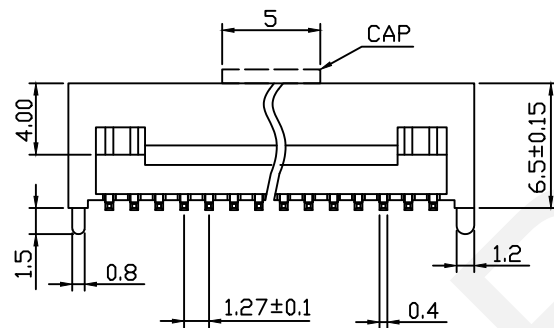

T3=With Post

T=Without Post



Material:

Housing:PA6T or LCP,UL94V-0

Contact:Brass

Plating:Gold Plated

Electrical Characteristics:

Rated Current:1.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature:-40°C~+105°C

Max,Processing Temp:230°C for 30-60

Seconds (260°C for 10 seconds)

Order Information

RHTAY02CD-XX-T-B-□-T

Box Header Series

02CD:1.27mm Pitch

XX-No.of 10~100 pin

SMT:T=Without Post

T3=With Post

Color:B-Black G-Gray

Material:NONE=PA6T

C=LCP D=PA9T

Packing:

T=Tube P=Tube+Cap R=Reel+Cap



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.27x1.27mm Pitch Box Header Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY02CD-XX-T-B-□-T


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9