
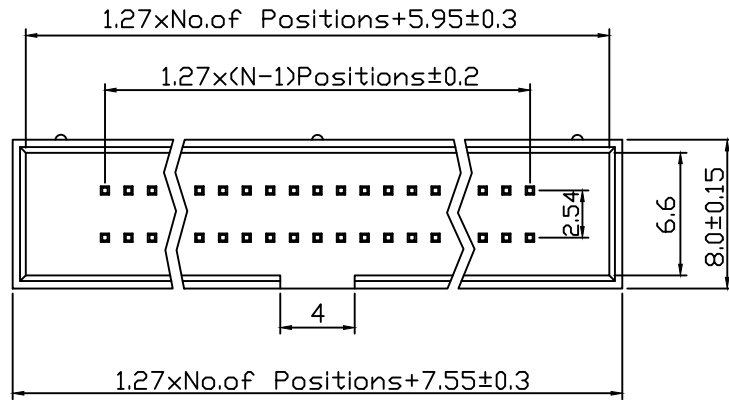



Recommended P.CB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

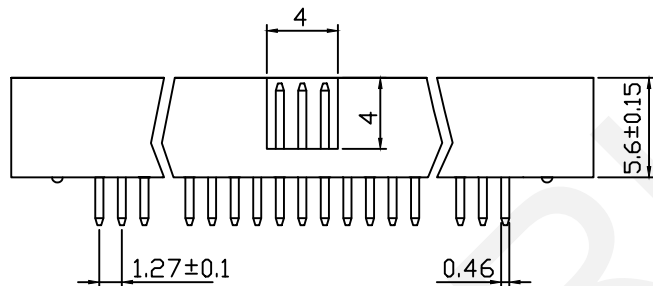

Material:

Housing: PA6T Or LCP,UL94V-0

Contact: Brass

Plating: Gold Plated

Electrical Characteristics:

Rated Current: 1.0AMP

Contact Resistance: 20MΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature:-40°C~+105°C

Max.Processing Temp:230°C For 30-60
Seconds (260°C For 10 Seconds)

Order Information:

Box Header Series RHTAY02D XX S B □
02D:1.27mm Pitch
XX-No.of 10~100 pins
Type:S-Straight pin
R-Right Angle Pin T-SMT
Color:B-Black G-Gray
Material:NDNE=PA6T C=LCP



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.27x2.54mm Pitch Box Header Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15



±0.3

±0.5



APPR BY ZHAN



RHTAY02D-XX-S-B-□

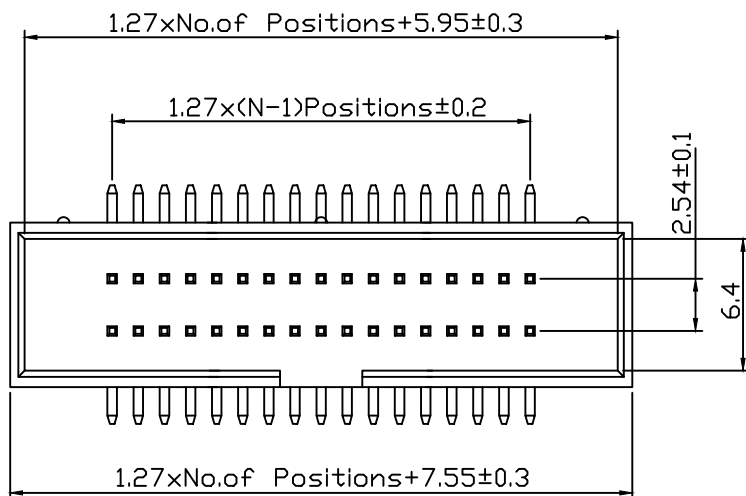

Recommended P.CB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

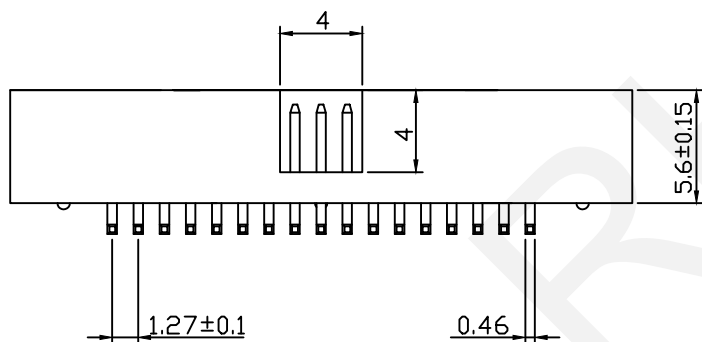

Material:

Housing: PA6T Or LCP,UL94V-0

Contact: Brass

Plating: Gold Plated

Electrical Characteristics:

Rated Current: 1.0AMP

Contact Resistance: 20MΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature:-40°C~+105°C

Max.Processing Temp:230°C For 30-60

Seconds (260°C For 10 Seconds)

Order Information:

Box Header Series—RHTAY02D XX T B □ T
02D:1.27mm Pitch
XX-No.of 10~100 pins
Type:S—Straight pin
R—Right Angle Pin T—SMT
Color:B—Black G—Gray
Material:None=PA6T C=LCP
Packing: _____
T=Tube P=Tube+Cap R=Reel+Cap



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.27x2.54mm Pitch Box Header Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAY02D-XX-T-B-□-T

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN