






RoHS Compliance

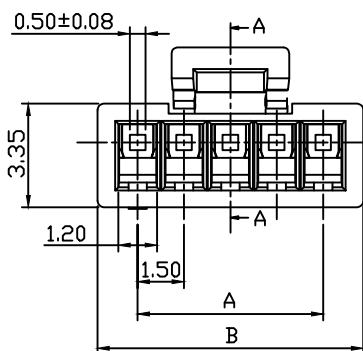

3D View



Pin	Dimension(mm)			
	A	B	C	D
02	1.50	4.10	3.30	2.40
03	3.00	5.60	4.80	2.40
04	4.50	7.10	6.30	3.80
05	6.00	8.60	7.80	3.80
06	7.50	10.10	9.30	3.80
07	9.00	11.60	10.80	3.80
08	10.50	13.10	12.30	5.80
09	12.00	14.60	13.80	5.80
10	13.50	16.10	15.30	5.80
11	15.00	17.60	16.80	5.80
12	16.50	19.10	18.30	5.80
13	18.00	20.60	19.80	5.80
14	19.50	22.10	21.30	5.80
15	21.00	23.60	22.80	5.80

Material:

Housing: PA66,UL94V-0

Electrical Characteristics:

Current Rating:2.5A AC,DC

Voltage Rating:250V AC,DC

Temperature Range: -25°C~+85°C

Insulator Resistance:1000MΩ/Min.

Withstanding Voltage:500V AC/Minute

Contact Resistance: 20MΩ/Max

Order Information:

RHTAYL4-1.50-XX-H

Pitch:1.50mm

XX-No.of 02~15Pin

Type:

H-Hosing T-Terminal

VM-Vertical SMT Pin

RM-Horizontal SMT Pin

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3


±0.5

APPR BY ZHAN

1.50mm Pitch 87439 87421 87437



Wire To Board Connector

THIRD ANGLE PROJECTION




RHTAYL4-1.50-XX-H



RoHS Compliance

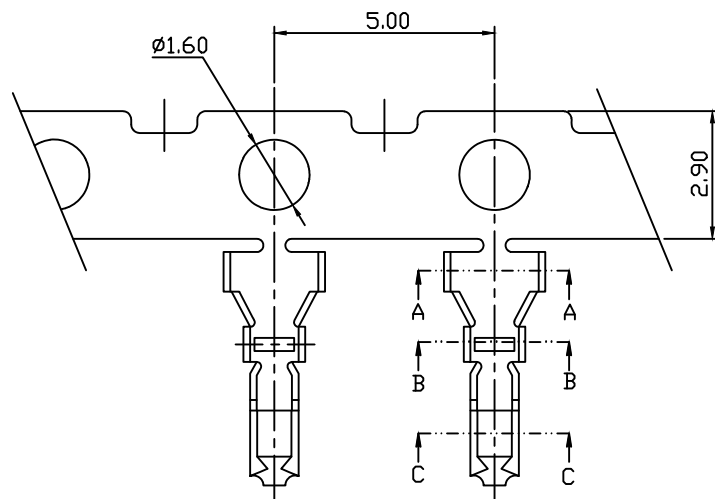

A-A



B-B

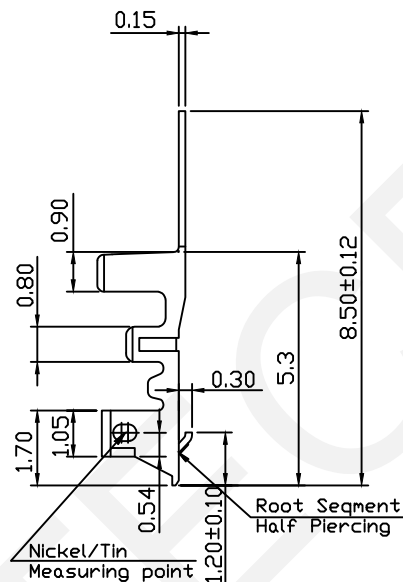

C-C

Material:

Terminal: Phosphor Bronze

Plating: Tin plated

Applicable Wires: AWG #24~#28

Insulation O.D: 0.70~1.10mm Max

Qty/Reel: 10000 PCS

Electrical Characteristics:

Current Rating: 2.5A AC, DC

Voltage Rating: 250V AC, DC

Temperature Range: -25°C~+85°C

Insulator Resistance: 1000MΩ/Min.

Withstanding Voltage: 500V AC/Minute

Contact Resistance: 20MΩ/Max

Order Information:

RHTAYL4-2.50-T

Pitch: 2.50mm

Type:

H-Hosing T-Terminal

VM-Vertical SMT Pin


RM-Horizontal SMT Pin

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5



CHK'D BY FENG
APPR BY ZHAN

1.50mm Pitch 87439 87421 87437
Wire To Board Connector




RHTAYL4-1.50-T

RoHS Compliance

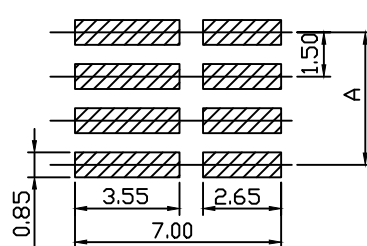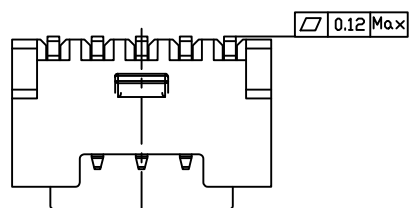




P.C.Board Layout



3D View

Material:
Housing: PA6T,UL94V-0
Contact:Brass
Plating: Tin Plated Over Nickel



Electrical Characteristics:
Current Rating:2.5A AC,DC
Voltage Rating:250V AC,DC
Temperature Range: -25°C~+85°C
Insulator Resistance:1000MΩ/Min.
Withstanding Voltage:500V AC/Minute
Contact Resistance: 20MΩ/Max

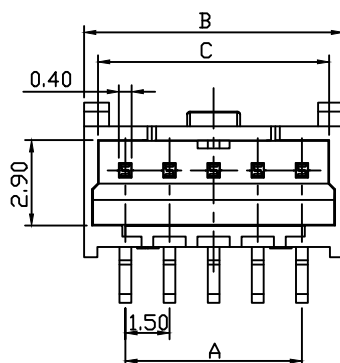

Pin	Dimension(mm)		
	A	B	C
02	1.50	4.30	3.35
03	3.00	5.80	4.85
04	4.50	7.30	6.35
05	6.00	8.80	7.85
06	7.50	10.30	9.35
07	9.00	11.80	10.85
08	10.50	13.30	12.35
09	12.00	14.80	13.85
10	13.50	16.30	15.35
11	15.00	17.80	16.85
12	16.50	19.30	18.35
13	18.00	20.80	19.85
14	19.50	22.30	21.35
15	21.00	23.80	22.85

Order Information:
RHTAYL4-1.50-XX-VM

Pitch:1.50mm
XX-No.of 02~15Pin
Type: _____
H-Hosing T-Terminal
VM-Vertical SMT Pin
RM-Horizontal SMT Pin



With Cap View

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG			
APPR BY ZHAN			




1.50mm Pitch 87439 87421 87437
Wire To Board Connector

THIRD ANGLE PROJECTION



RHTAYL4-1.50-XX-VM

RoHS Compliance



3D View

Material:

Housing: PA6T,UL94V-0

Contact:Brass

Plating: Tin Plated Over Nickel

Electrical Characteristics:

Current Rating:2.5A AC,DC



Voltage Rating:250V AC,DC

Temperature Range: -25°C~+85°C

Insulator Resistance:1000MΩ/Min.

Withstanding Voltage:500V AC/Minute

Contact Resistance: 20MΩ/Max

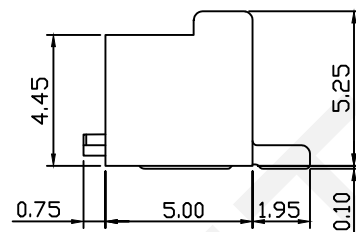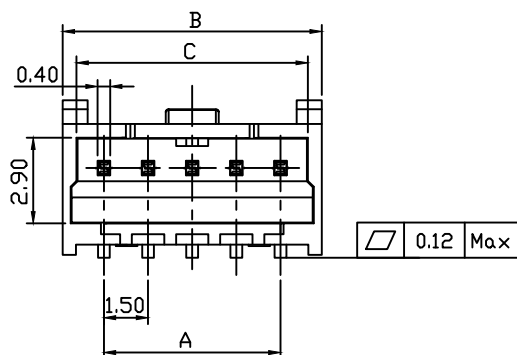

Pin	Dimension(mm)		
	A	B	C
02	1.50	4.30	3.35
03	3.00	5.80	4.85
04	4.50	7.30	6.35
05	6.00	8.80	7.85
06	7.50	10.30	9.35
07	9.00	11.80	10.85
08	10.50	13.30	12.35
09	12.00	14.80	13.85
10	13.50	16.30	15.35
11	15.00	17.80	16.85
12	16.50	19.30	18.35
13	18.00	20.80	19.85
14	19.50	22.30	21.35
15	21.00	23.80	22.85

Order Information:

RHTAYL4-1.50-XX-RM

Pitch:1.50mm


XX-No.of 02~15Pin

Type:

H-Hosing T-Terminal

VM-Vertical SMT Pin

RM-Horizontal SMT Pin

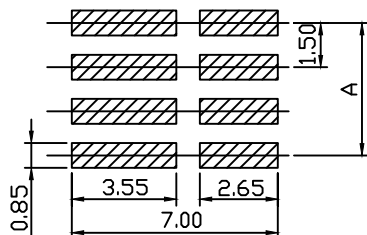

P.C.Board Layout

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.50mm Pitch 87439 87421 87437

Wire To Board Connector

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAYL4-1.50-XX-RM

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

1

2

3

4

5

6

7

8

9