
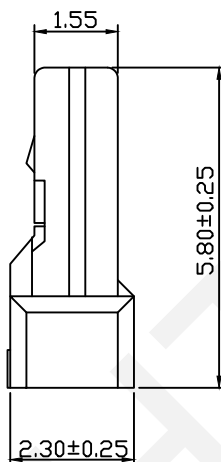

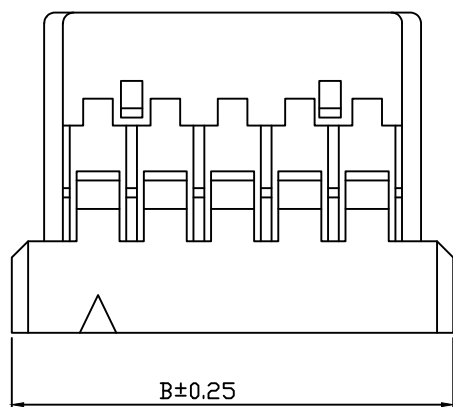


RoHS Compliance

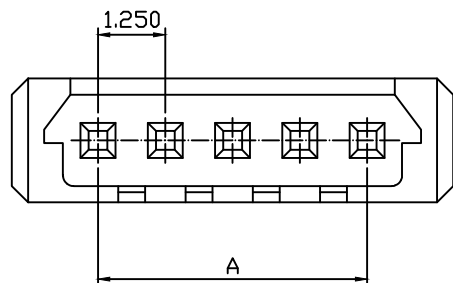

Pin	Dimension(mm)	
	A	B
02	1.25	4.50
03	2.50	5.75
04	3.75	7.00
05	5.00	8.25
06	15.70	9.50
07	6.25	10.75
08	7.50	12.00
09	8.75	13.25
10	10.00	14.50
11	11.25	15.75
12	13.75	17.00
13	15.00	18.25
14	16.25	19.50
15	17.50	20.75
20	23.75	27.00
25	30.00	33.25
30	36.25	39.50

Material:

Housing: PA66,UL94V-0,White

Electrical Characteristics:

Current Rating : 1.0A AC,DC

Voltage Rating : 150V AC,DC

Temperature Range: -25°C~+85°C

Insulator Resistance: 500MΩ/Min.

Withstanding Voltage: 500V AC/Minute

Contact Resistance: 30MΩ/Max

Order Information:

RHTAYL5-1.25-XX-H

Pitch:1.25mm

XX-No.of 02~30Pin

Type:

T-Terminal H-Hosing

RM-SMT Male Pin

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN


1.25mm Pitch DF14 Type
Wire To Board Connector

THIRD ANGLE PROJECTION



RHTAYL5-1.25-XX-H

RoHS Compliance

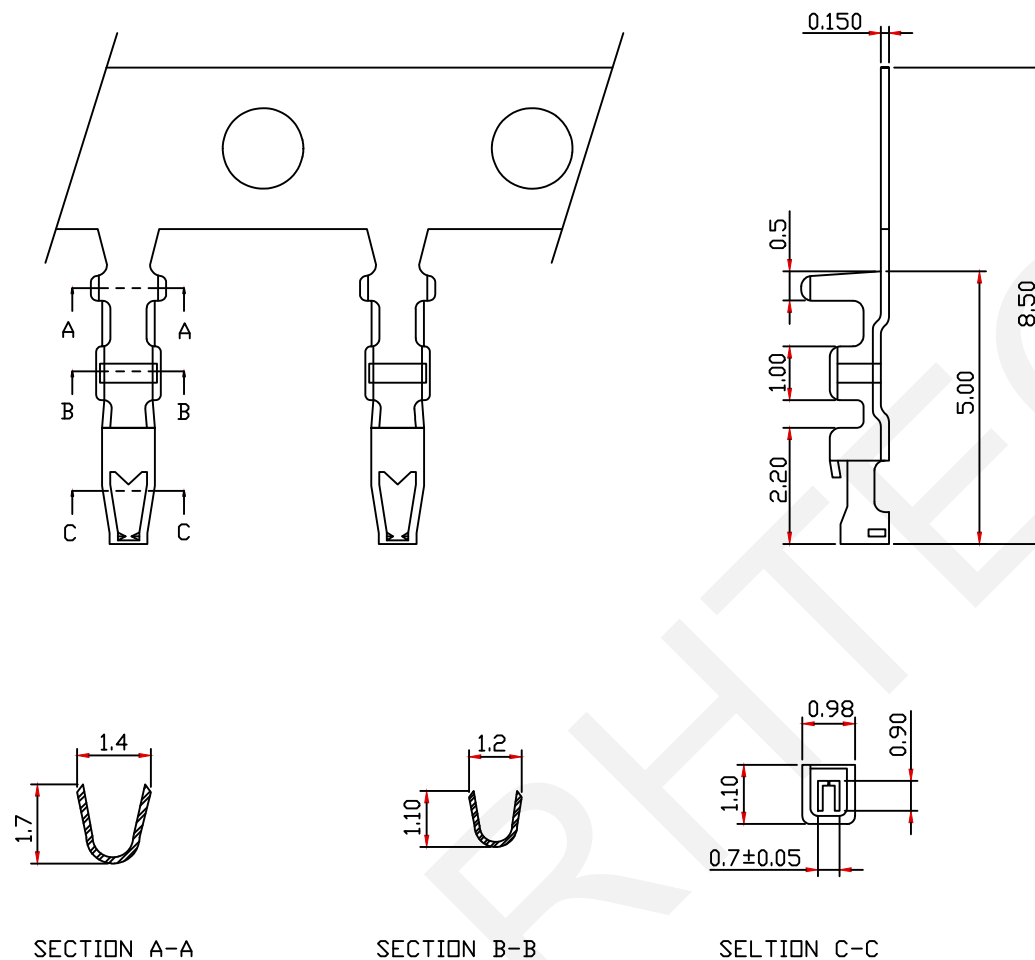

Material:

Terminal: Phosphor Bronze

Plating: Tin plated

Applicable Wires: AWG #28~#32

Insulation O.D: 1.00mm Max

Qty/Reel: 10000 PCS

Electrical Characteristics:

Current Rating : 1.0A AC,DC

Voltage Rating : 150V AC,DC

Temperature Range: -25°C~+85°C

Insulator Resistance: 500MΩ/Min.

Withstanding Voltage: 500V AC/Minute

Contact Resistance: 30MΩ/Max

Order Information:

RHTAYL5-1.25-T

Pitch: 1.25mm

Type:

T-Terminal H-Hosing

RM-SMT Male Pin

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.25mm Pitch DF14 Type
Wire To Board Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAYL5-1.25-T

±0.12






±0.15

±0.3

±0.5

APPR BY ZHAN

RoHS Compliance

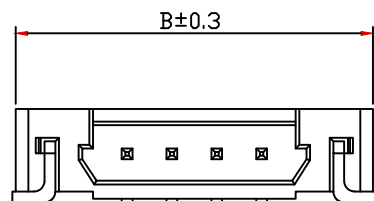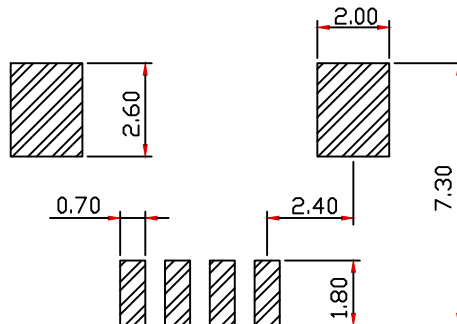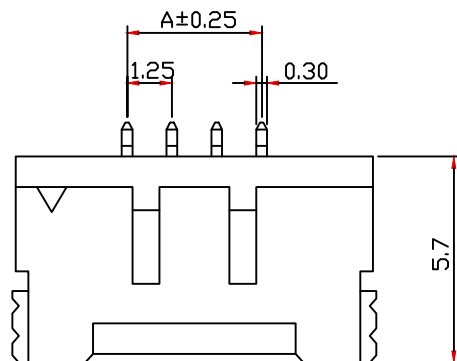

Pin	Dimension(mm)	
	A	B
02	1.25	7.45
03	2.50	8.70
04	3.75	9.95
05	5.00	11.20
06	15.70	12.45
07	6.25	13.70
08	7.50	14.95
09	8.75	16.20
10	10.00	17.45
11	11.25	18.70
12	13.75	19.95
13	15.00	21.20
14	16.25	22.45
15	17.50	23.70
20	23.75	29.95
25	30.00	36.20
30	36.25	42.45

Material:

Housing: PA6T,UL94V-0

Contact :Brass

Plating : Tin plated over Nickel

Electrical Characteristics:

Current Rating : 1.0A AC,DC

Voltage Rating : 150V AC,DC

Temperature Range: -25°C~+85°C

Insulator Resistance: 500MΩ/Min.

Withstanding Voltage: 500V AC/Minute

Contact Resistance: 30MΩ/Max

Order Information:

RHTAYL5-1.25-XX-RM

Pitch:1.25mm

XX-No.of 02~30Pin

Type:

T-Terminal H-Hosing

RM-SMT Male Pin

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN

1.25mm Pitch DF14 Type
Wire To Board Connector

THIRD ANGLE PROJECTION



RHTAYL5-1.25-XX-RM