

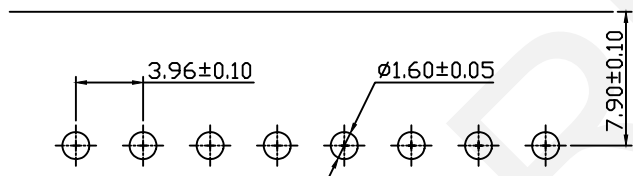
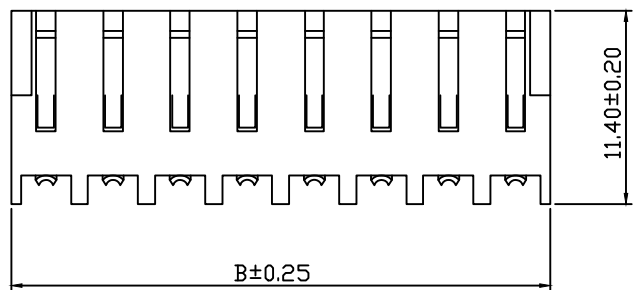
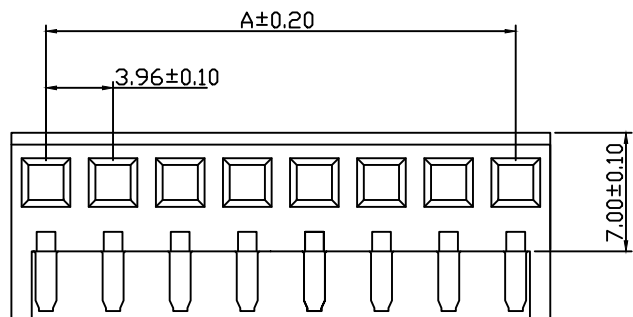


RoHS Compliance

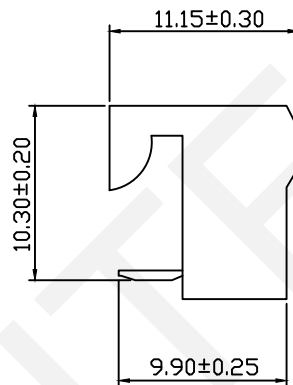

PCB LAYOUT

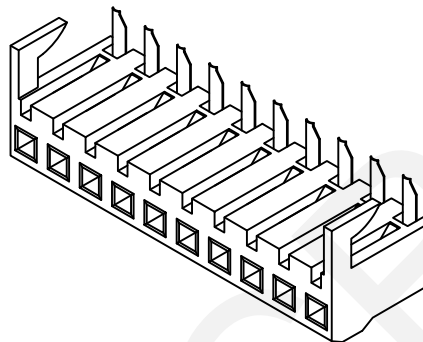

Pins	Dimension(mm)	
	A	B
02	3.96	8.06
03	7.92	12.02
04	11.88	15.98
05	15.84	19.94
06	19.80	23.90
07	23.76	27.86
08	27.72	31.82
09	31.68	35.78
10	35.64	39.74
11	39.60	43.70
12	43.56	47.66
13	47.52	51.62
14	51.48	55.58
15	55.44	59.54
16	59.40	63.50

Material:

Insulator:PA66 UL94V-0,White

Electrical Characteristics:

Rated Current:7.0AMP

Voltage Rating:250V AC DC

Temperature Range:-40°C~+105°C

Insulation Resistance:1000MΩ Min

Withstand Voltage:1000V AC/Minute

Contact Resistance:10mΩ Max

Order Information:

RHTAY3.96B-XX-AW

Pitch:3.96mm

XX-No.of 02~16Pins

Type:

BW/CW-Straight Male Pin

AW-Right Angle Male Pin

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN



3.96mm Pitch KK156 41815 2145
Board To Board Connector

THIRD ANGLE PROJECTION





RHTAY3.96B-XX-AW

RoHS Compliance

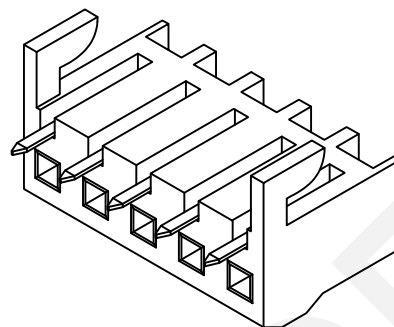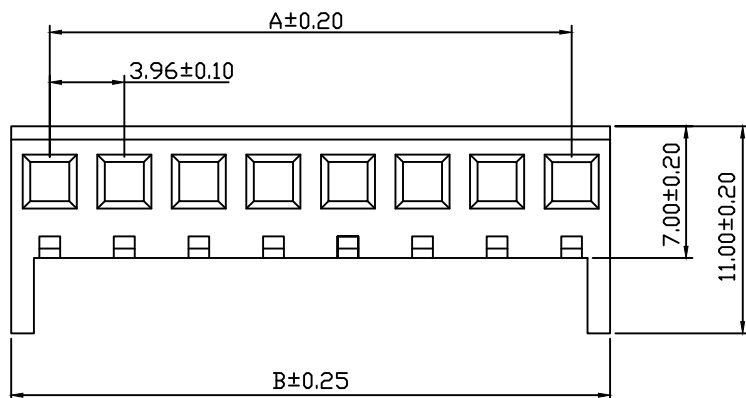

Material:
Insulator:PA66 UL94V-0,White


Electrical Characteristics:
Rated Current:7.0AMP
Voltage Rating:250V AC DC
Temperature Range:-40°C~+105°C
Insulation Resistance:1000MΩ Min
Withstand Voltage:1000V AC/Minute
Contact Resistance:10mΩ Max

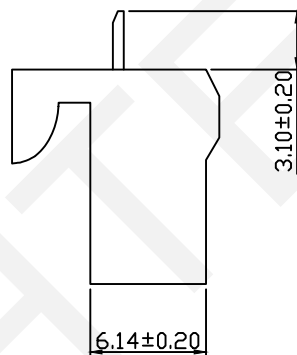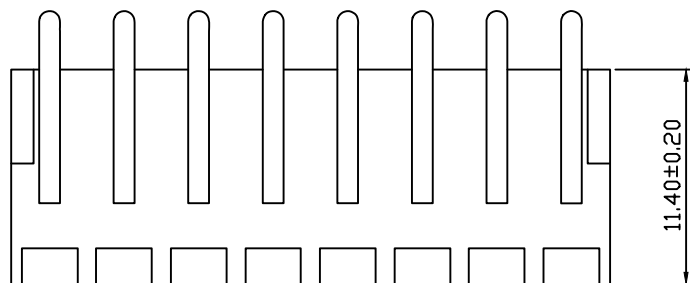

Pins	Dimension(mm)	
	A	B
02	3.96	8.06
03	7.92	12.02
04	11.88	15.98
05	15.84	19.94
06	19.80	23.90
07	23.76	27.86
08	27.72	31.82
09	31.68	35.78
10	35.64	39.74
11	39.60	43.70
12	43.56	47.66
13	47.52	51.62
14	51.48	55.58
15	55.44	59.54
16	59.40	63.50

Order Information:
RHTAY3.96B-XX-BW

Pitch:3.96mm
XX-No.of 02~16Pins
Type: _____
BW/CW-Straight Male Pin
AW-Right Angle Male Pin

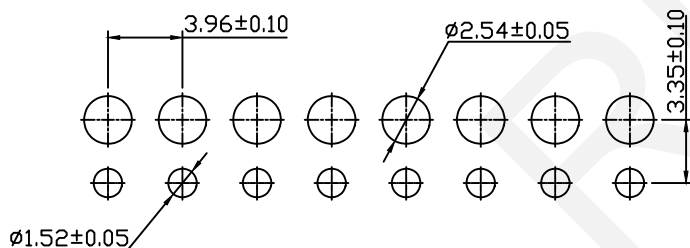

PCB LAYOUT

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---
0~3 3~18 18~50 50~120
±0.12 ±0.15 ±0.3 ±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN



3.96mm Pitch KK156 41815 2145
Board To Board Connector

THIRD ANGLE PROJECTION




RHTAY3.96B-XX-BW

RoHS Compliance

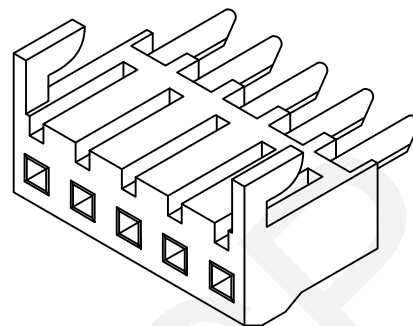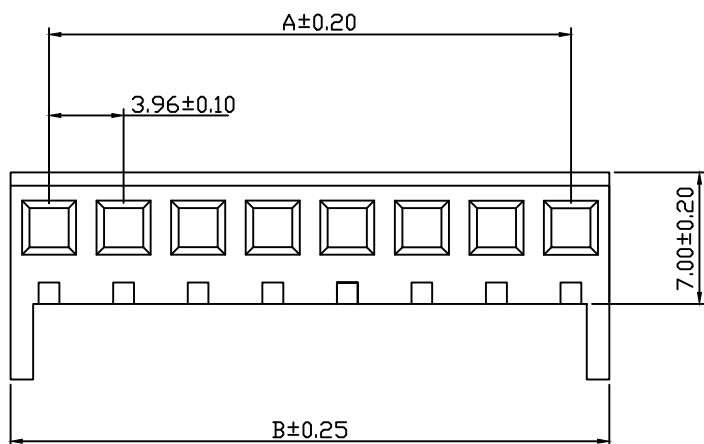


Material:
Insulator:PA66 UL94V-0,White

Electrical Characteristics:
Rated Current:7.0AMP
Voltage Rating:250V AC DC
Temperature Range:-40°C~+105°C
Insulation Resistance:1000MΩ Min
Withstand Voltage:1000V AC/Minute
Contact Resistance:10mΩ Max

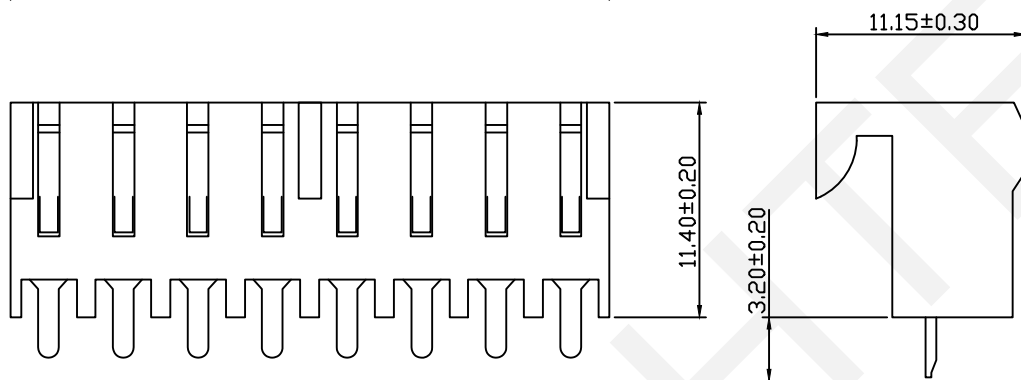


Pins	Dimension(mm)	
	A	B
02	3.96	8.06
03	7.92	12.02
04	11.88	15.98
05	15.84	19.94
06	19.80	23.90
07	23.76	27.86
08	27.72	31.82
09	31.68	35.78
10	35.64	39.74
11	39.60	43.70
12	43.56	47.66
13	47.52	51.62
14	51.48	55.58
15	55.44	59.54
16	59.40	63.50

Order Information:
RHTAY3.96B-XX-CW



Pitch:3.96mm
XX-No.of 02~16Pins
Type: _____
BW/CW-Straight Male Pin
AW-Right Angle Male Pin

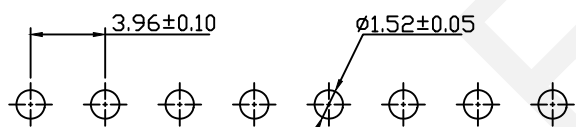

PCB LAYOUT

UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
±0.12	±0.15	±0.3

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

3.96mm Pitch KK156 41815 2145 Board To Board Connector
THIRD ANGLE PROJECTION RHTAY3.96B-XX-CW