
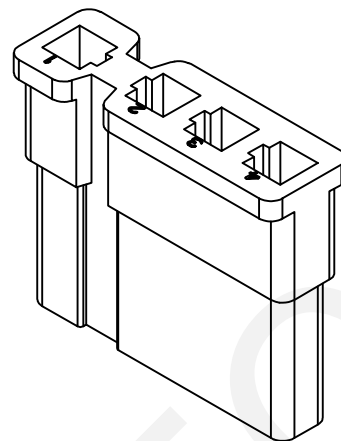


RoHS Compliance

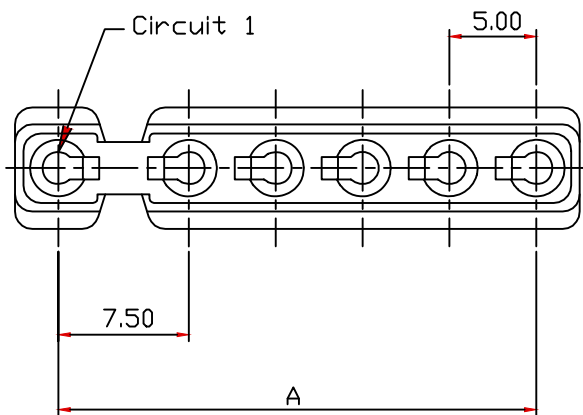


Material:
Housing: PA66,UL94V-0

Electrical Characteristics:
Current Rating:7.0AMP
Voltage Rating:250V AC,DC
Temperature Range: -25°C~+85°C
Insulator Resistance:1000MΩ/Min.
Withstanding Voltage:1500V AC/Minute
Contact Resistance: 10MΩ/Max

Order Information:
RHTAYL1-7.50-XX-H

Pitch:7.50mm
XX-No.of 01~06Pin
Type:
H-Hosing T-Terminal
S-Straight Male Pin

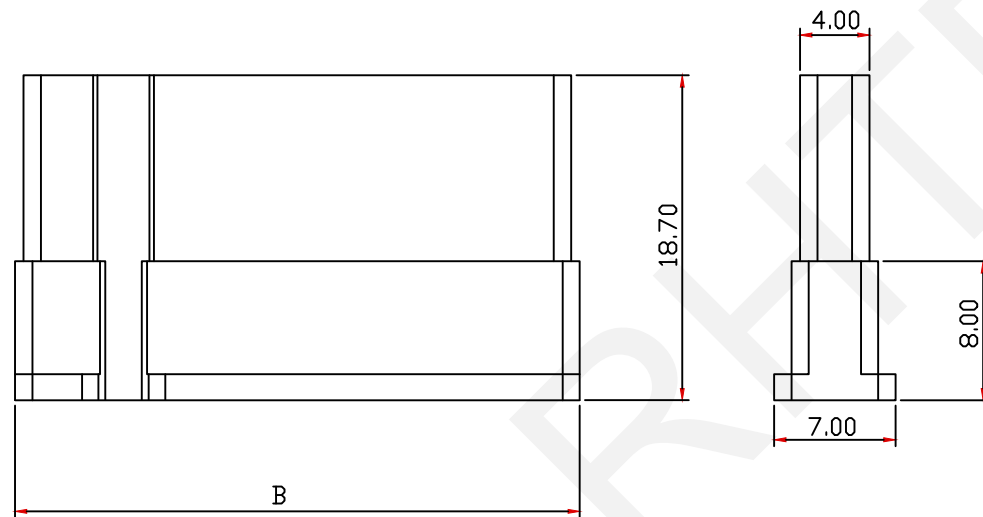

Pin	Dimension(mm)	
	A	B
01	---	5.00
02	7.50	12.50
03	10.00	17.50
04	17.50	22.50
05	22.50	27.50
06	27.50	32.50

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

7.50mm Pitch Wire To Board Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3




±0.5

APPR BY ZHAN





RHTAYL1-7.50-XX-H

RoHS Compliance

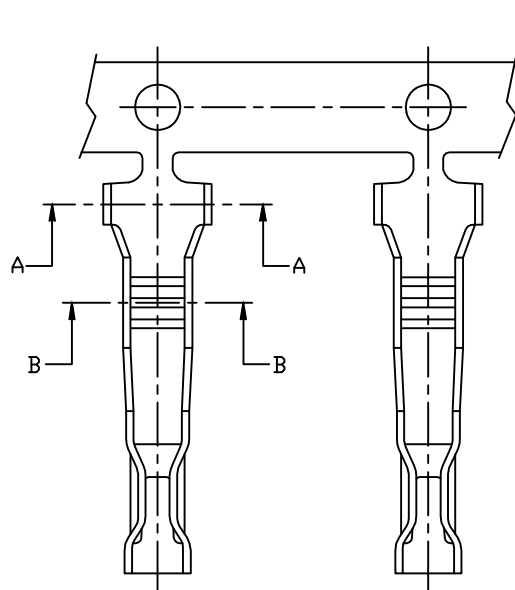

A-A

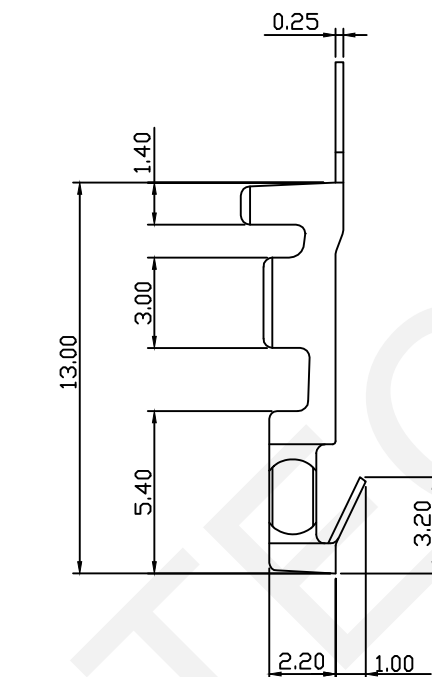

B-B

Material:

Terminal: Brass

Plating: Tin plated

Applicable Wires: AWG #18~#24

Insulation O.D: 2.70mm Max

Qty/Reel: 6000 PCS

Electrical Characteristics:

Current Rating: 7.0AMP

Voltage Rating: 250V AC, DC

Temperature Range: -25°C ~ +85°C

Insulator Resistance: 1000MΩ/Min.

Withstanding Voltage: 1500V AC/Minute

Contact Resistance: 10MΩ/Max

Order Information:

RHTAYL7-1.50-T

Pitch: 7.50mm

Type:

H-Hosing T-Terminal

S-Straight Male Pin

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

7.50mm Pitch Wire To Board Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYL1-7.50-T

1

2

3

4

5



6

7

8

9

RoHS Compliance

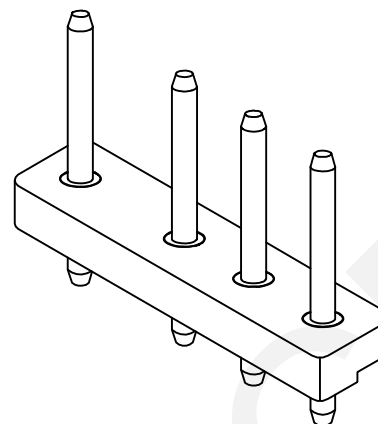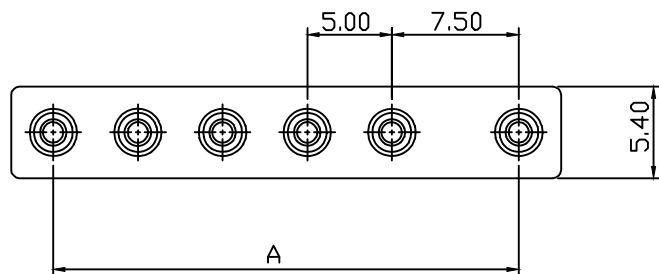

Material:

Housing: PA66,UL94V-0

Contact:Brass

Plating: Tin Plated

Electrical Characteristics:

Current Rating:7.0AMP



Voltage Rating:250V AC,DC

Temperature Range: -25°C~+85°C

Insulator Resistance:1000MΩ/Min.

Withstanding Voltage:1500V AC/Minute

Contact Resistance: 10MΩ/Max

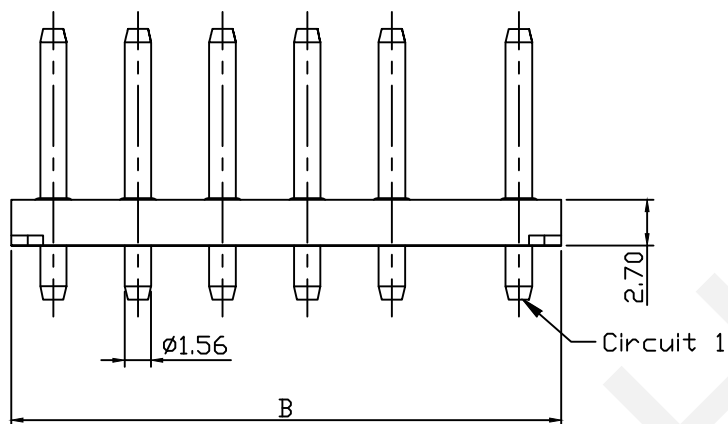

Order Information:

RHTAYL1-7.50-XX-S


Pitch:7.50mm

XX-No.of 01~06Pin

Type:

H-Hosing T-Terminal

S-Straight Male Pin

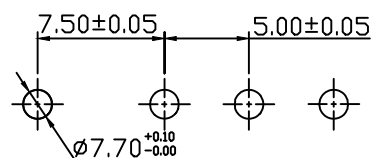

PCB LAYOUT

Pin	Dimension(mm)	
	A	B
01	---	5.00
02	7.50	12.50
03	10.00	17.50
04	17.50	22.50
05	22.50	27.50
06	27.50	32.50



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

7.50mm Pitch Wire To Board Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYL1-7.50-XX-S