



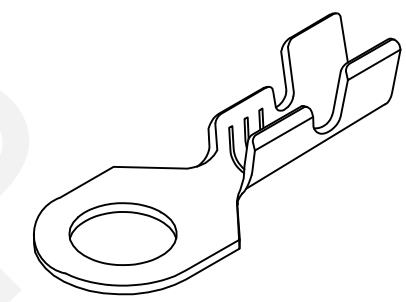


Note:
1.Appearance:Terminal cannot be corrected,scratched or oxidized
2.Material:
Brass C2680,T=0.50mm, Tin plating
3.Q'TY:5000PCS/REEL
4.Wire Range:18~20AWG

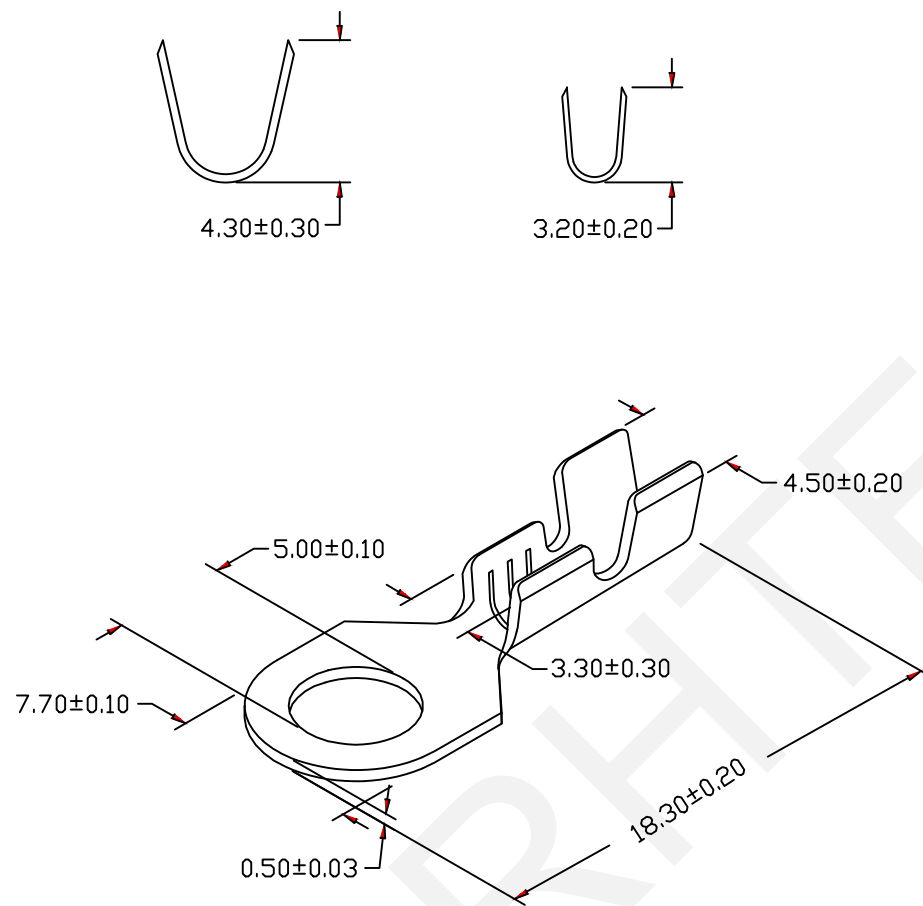

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm		SHEET SIZE: A4		SCALE:---	DRWN BY PAN	ø2.0mm Ring Non-insulated terminals	
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 	RHTHYRD200501	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN			

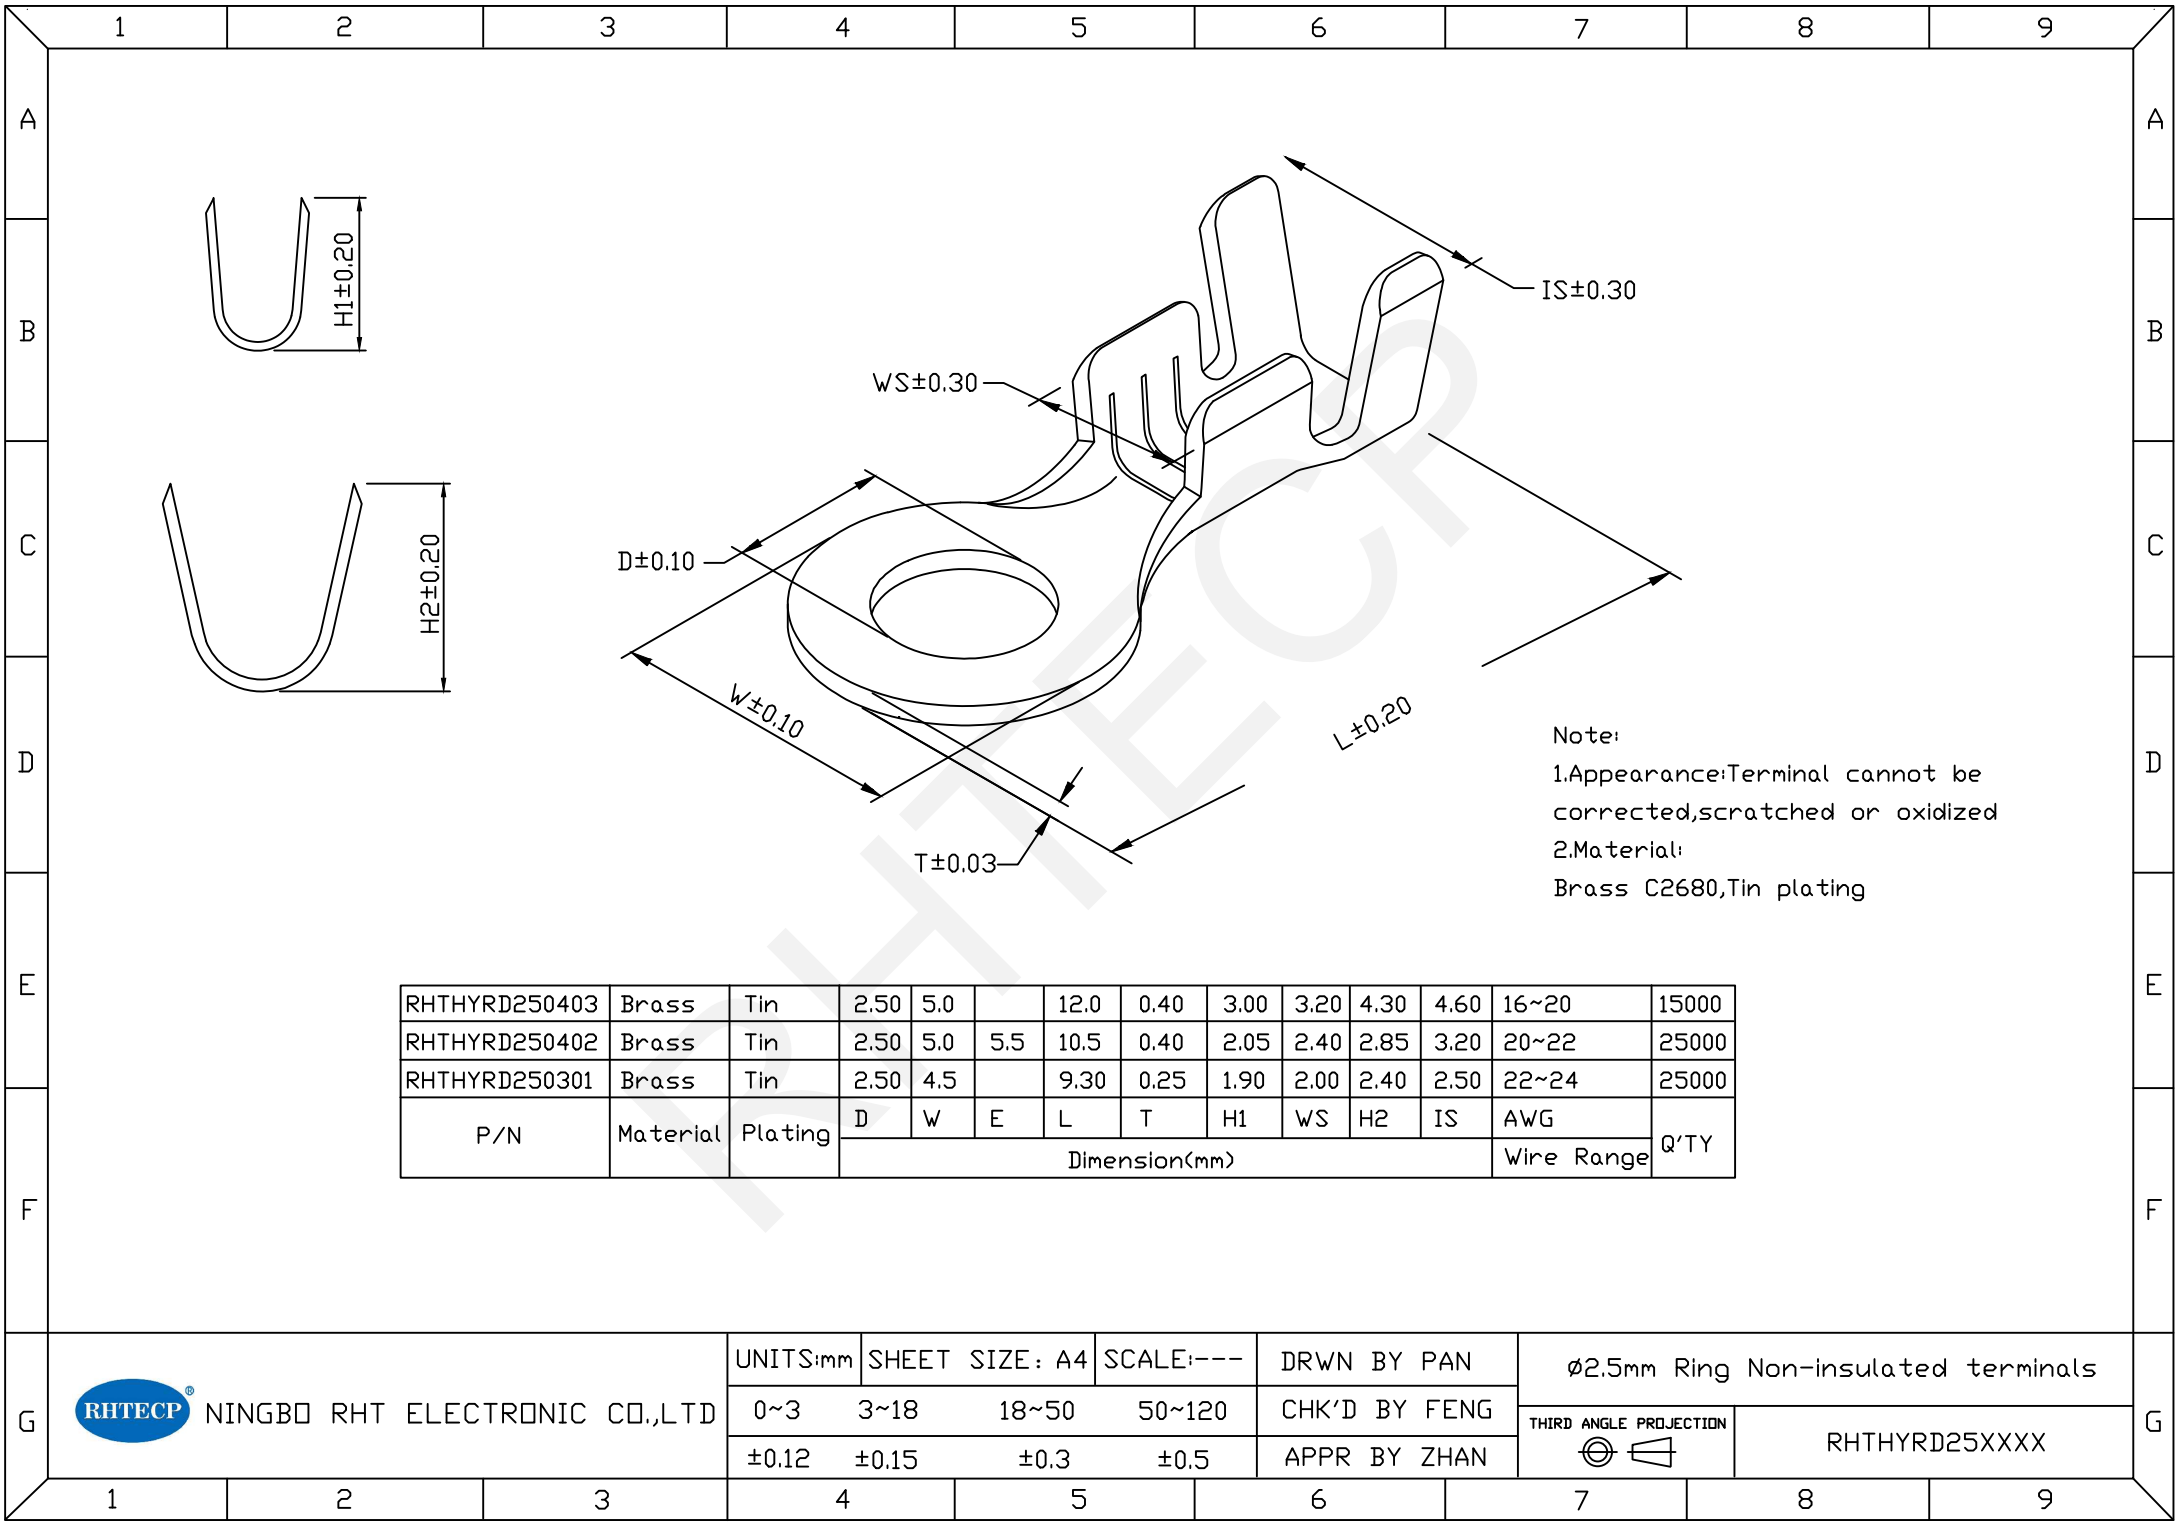

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

ø2.5mm Ring Non-insulated terminals

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN




RHTHYRD25XXXX

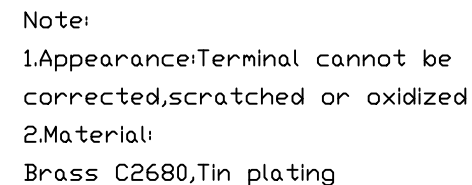



RHTHYRD320506	Brass	Tin	3.20	7.0	10.0	17.5	0.50	4.40	4.70	5.70	6.30	12~14	5000
RHTHYRD320405	Brass	Tin	3.20	7.0	8.70	16.0	0.40	3.30	3.50	4.60	4.80	16~20	7500
RHTHYRD320304	Brass	Tin	3.20	6.4	10.0	15.2	0.30	2.30	2.80	3.60	3.70	18~22	7500
RHTHYRD320403	Brass	Tin	3.20	6.0	6.30	10.5	0.40	2.90	3.20	4.20	4.60	16~18	15000
RHTHYRD320402	Brass	Tin	3.20	5.0	5.40	10.0	0.40	2.85	3.00	4.30	4.60	18~20	15000
RHTHYRD320401	Brass	Tin	3.20	5.0	5.50	10.5	0.40	2.05	2.40	2.85	3.20	20~24	25000
P/N	Material	Plating	D	W	E	L	T	H1	WS	H2	IS	AWG	Q'TY
			Dimension(mm)									Wire Range	

RHTHYRD32XXX

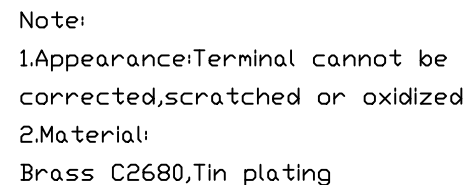

RHTHYRD370304	Brass	Tin	3.70	7.0	8.70	16.0	0.40	3.30	3.50	4.60	4.80	16~20	7500
RHTHYRD370403	Brass	Tin	3.70	6.5	7.00	11.6	0.40	2.90	3.20	4.70	4.70	16~20	15000
RHTHYRD370402	Brass	Tin	3.70	8.0	11.0	19.0	0.40	3.30	3.60	5.00	5.20	16~18	5000
RHTHYRD370401	Brass	Tin	3.70	6.0	8.70	12.4	0.40	3.00	3.20	4.30	4.60	16~18	15000
P/N	Material	Plating	D	W	E	L	T	H1	WS	H2	IS	AWG	Q'TY
			Dimension(mm)									Wire Range	

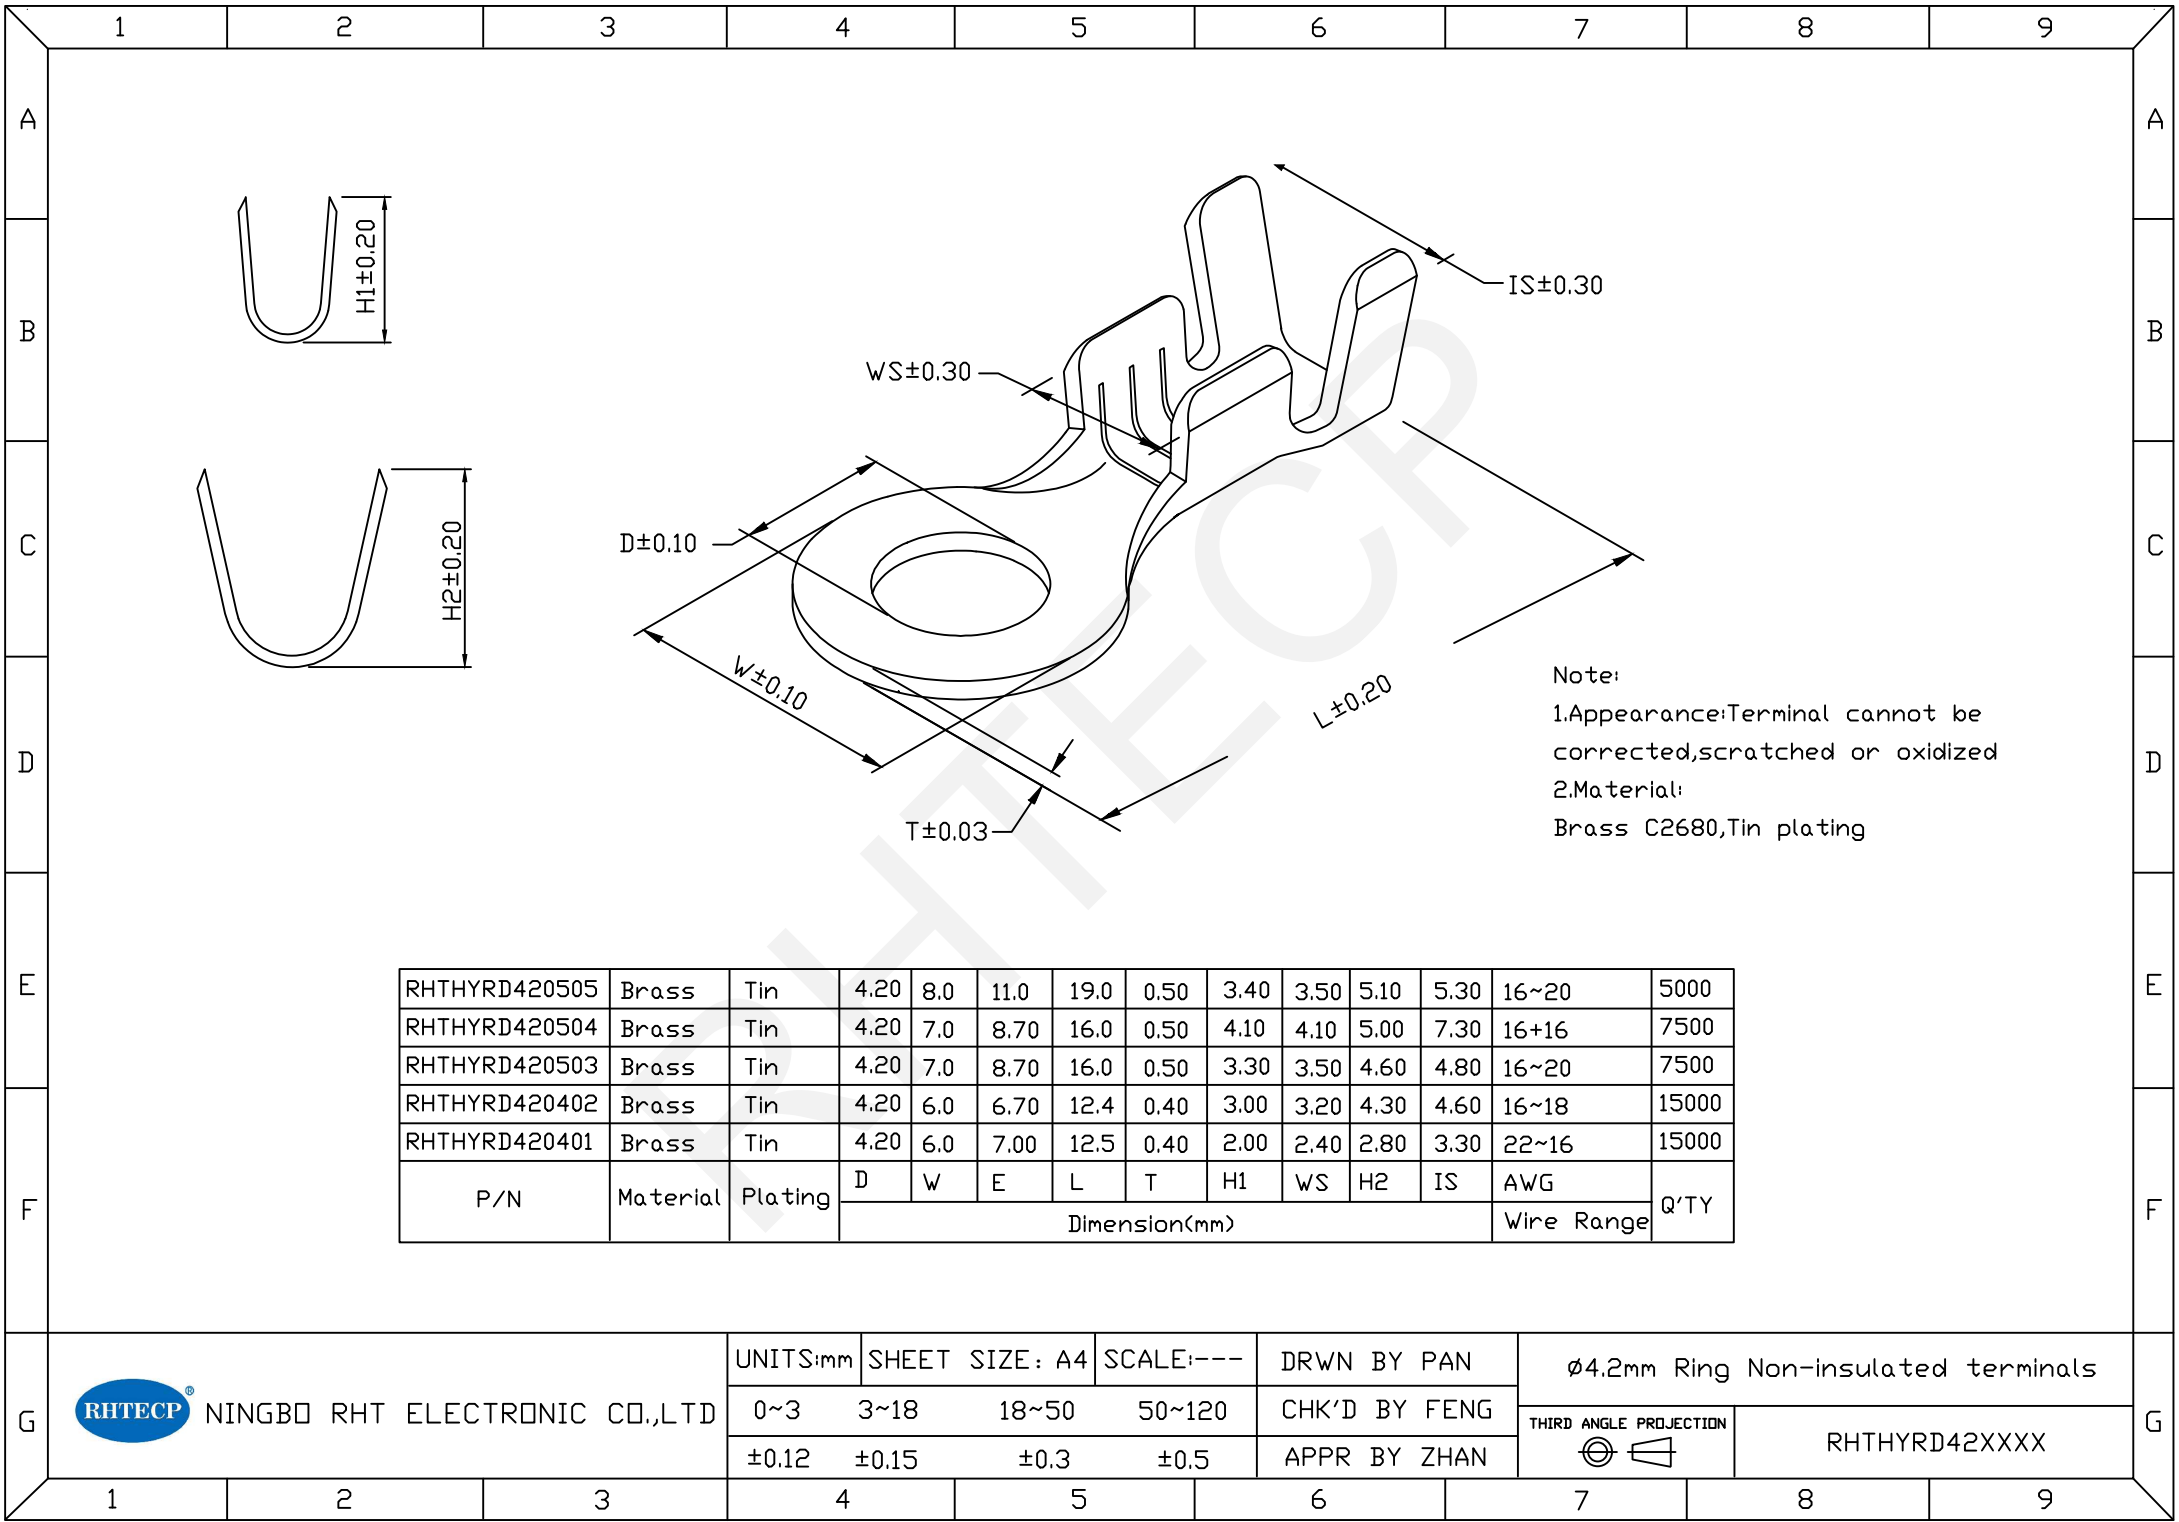

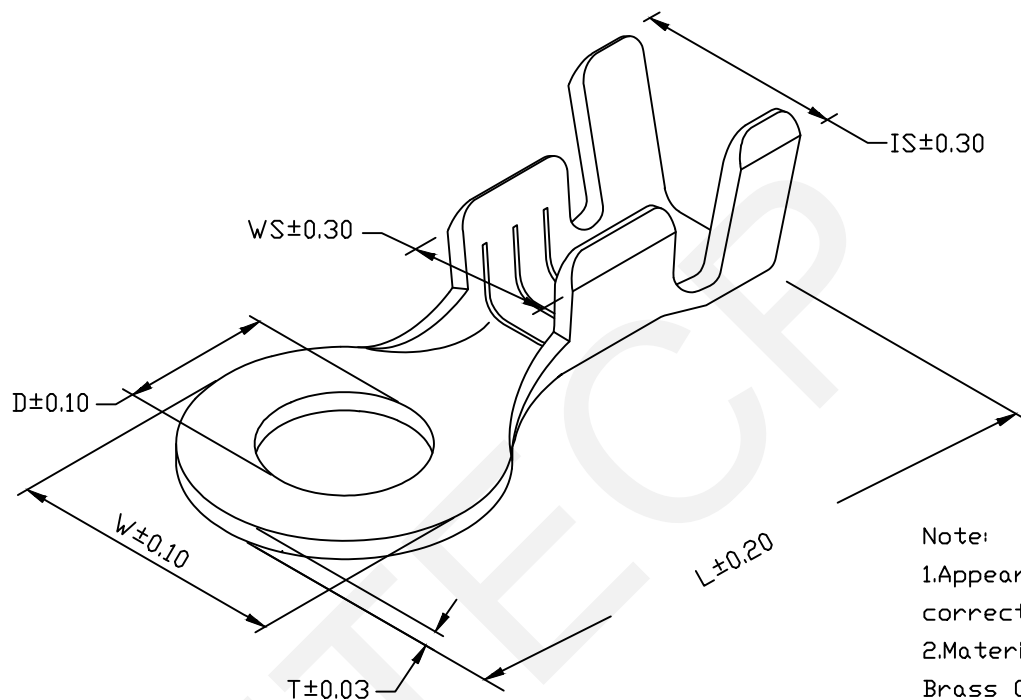


Brass C2680,Tin plating





RHTHYRD53XXX




APPR BY ZHAN

9

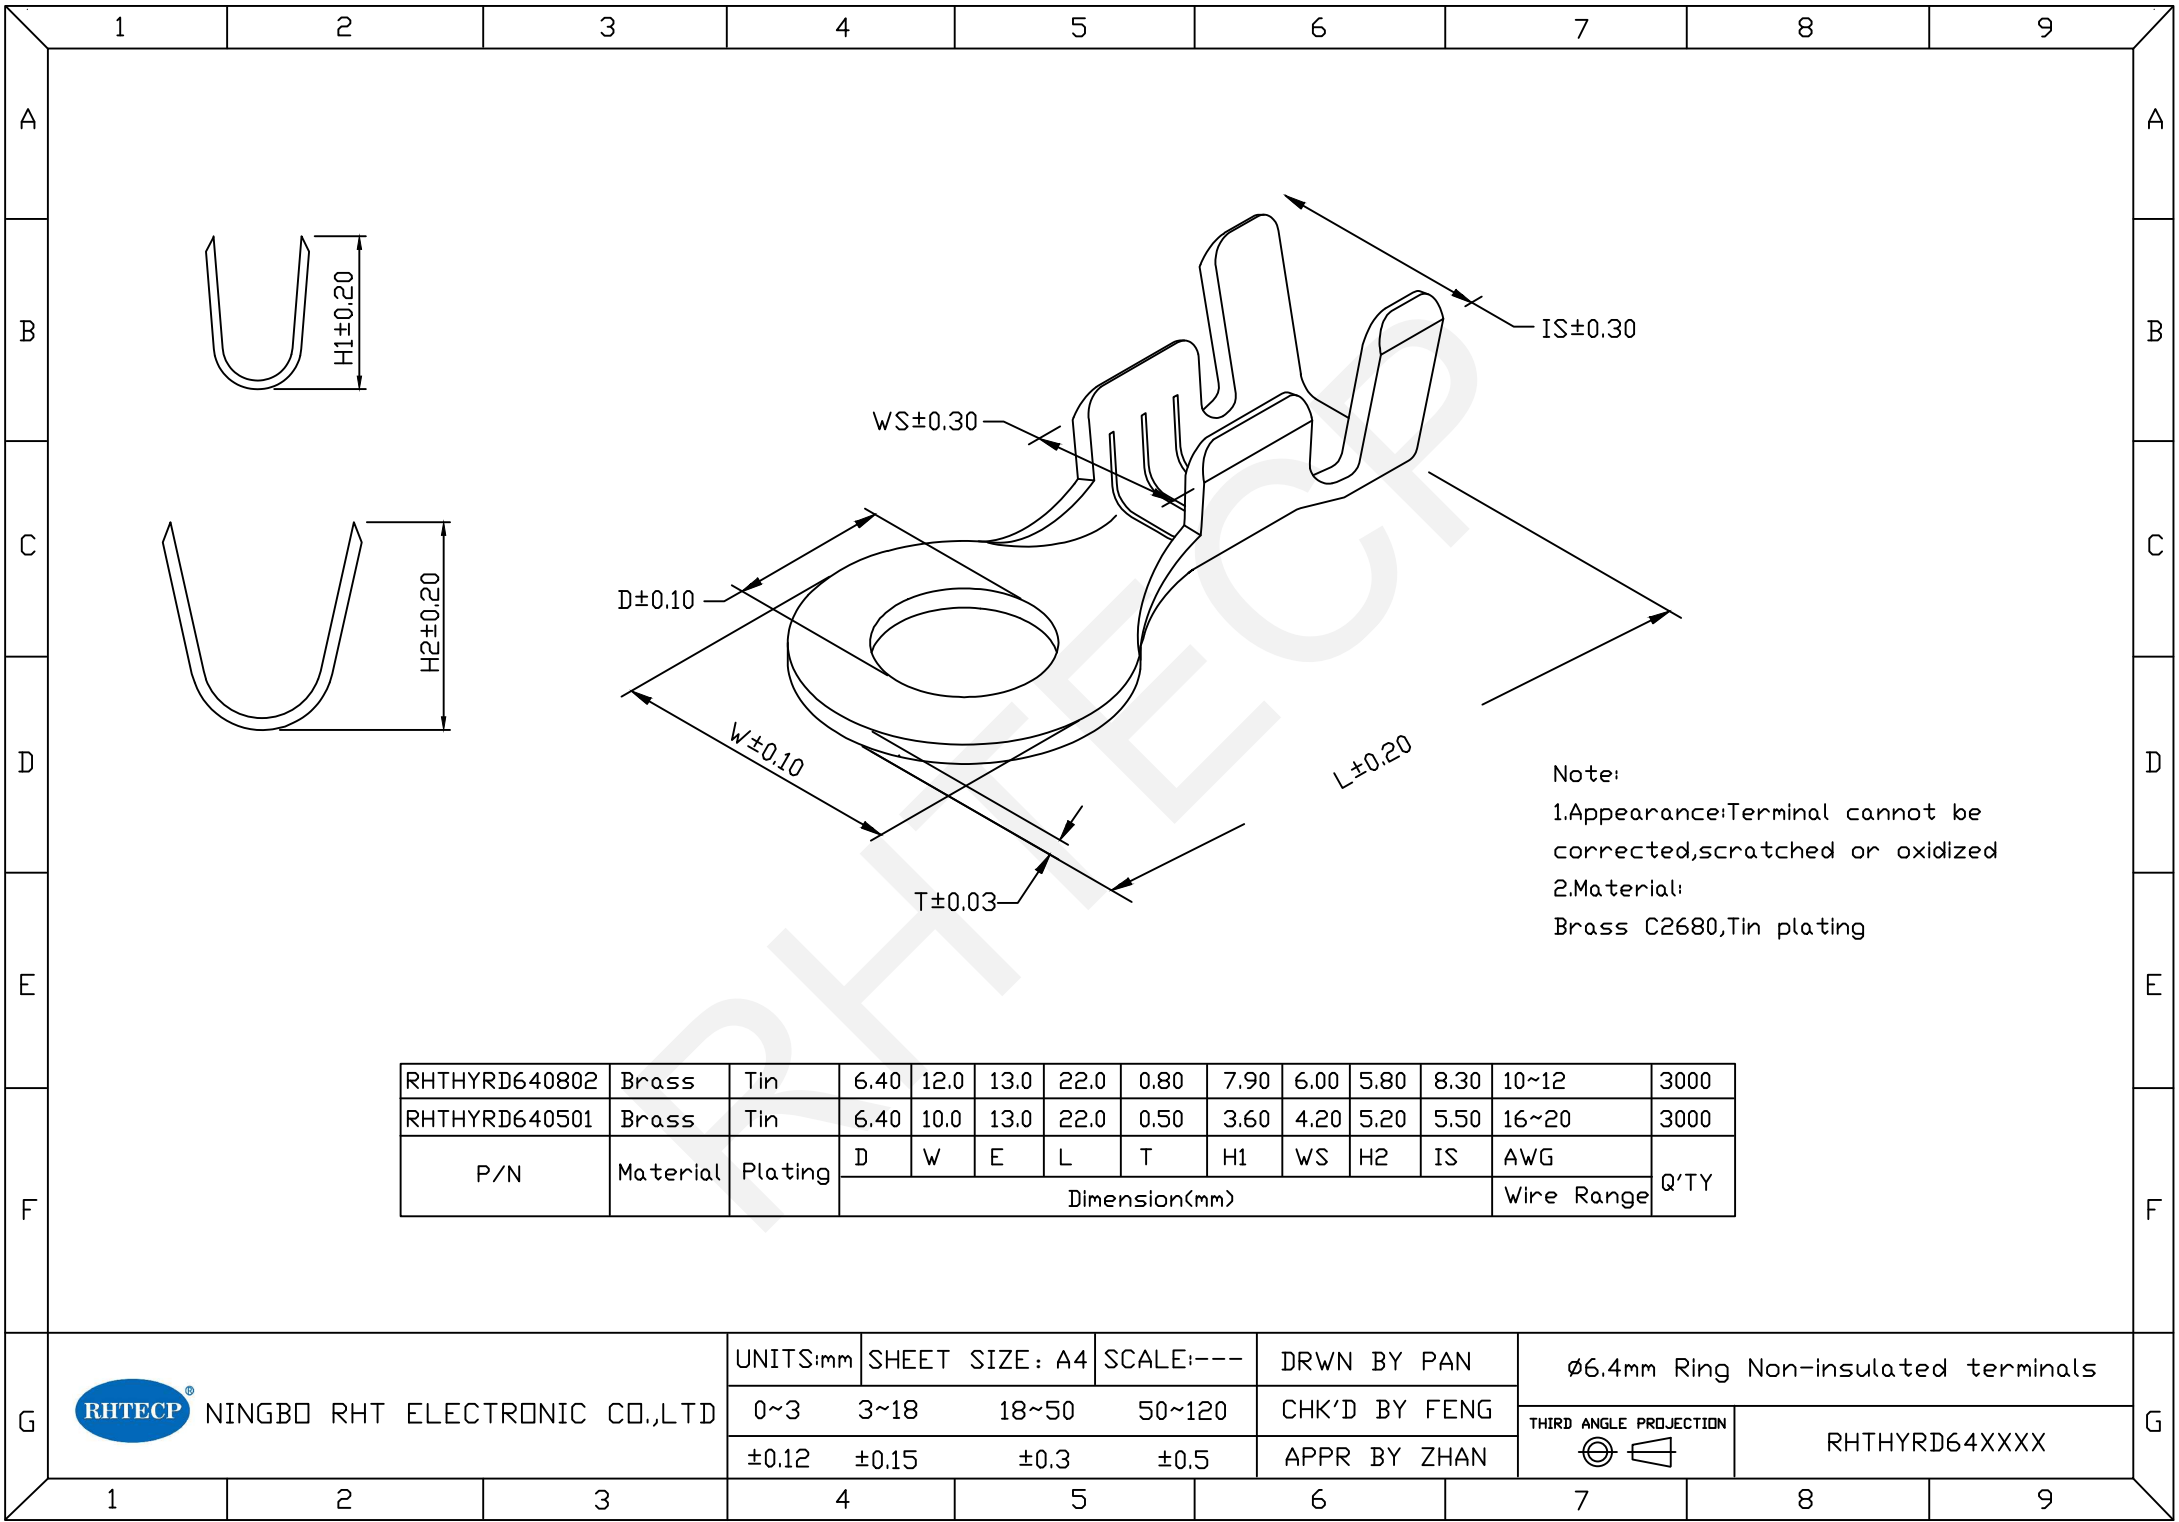

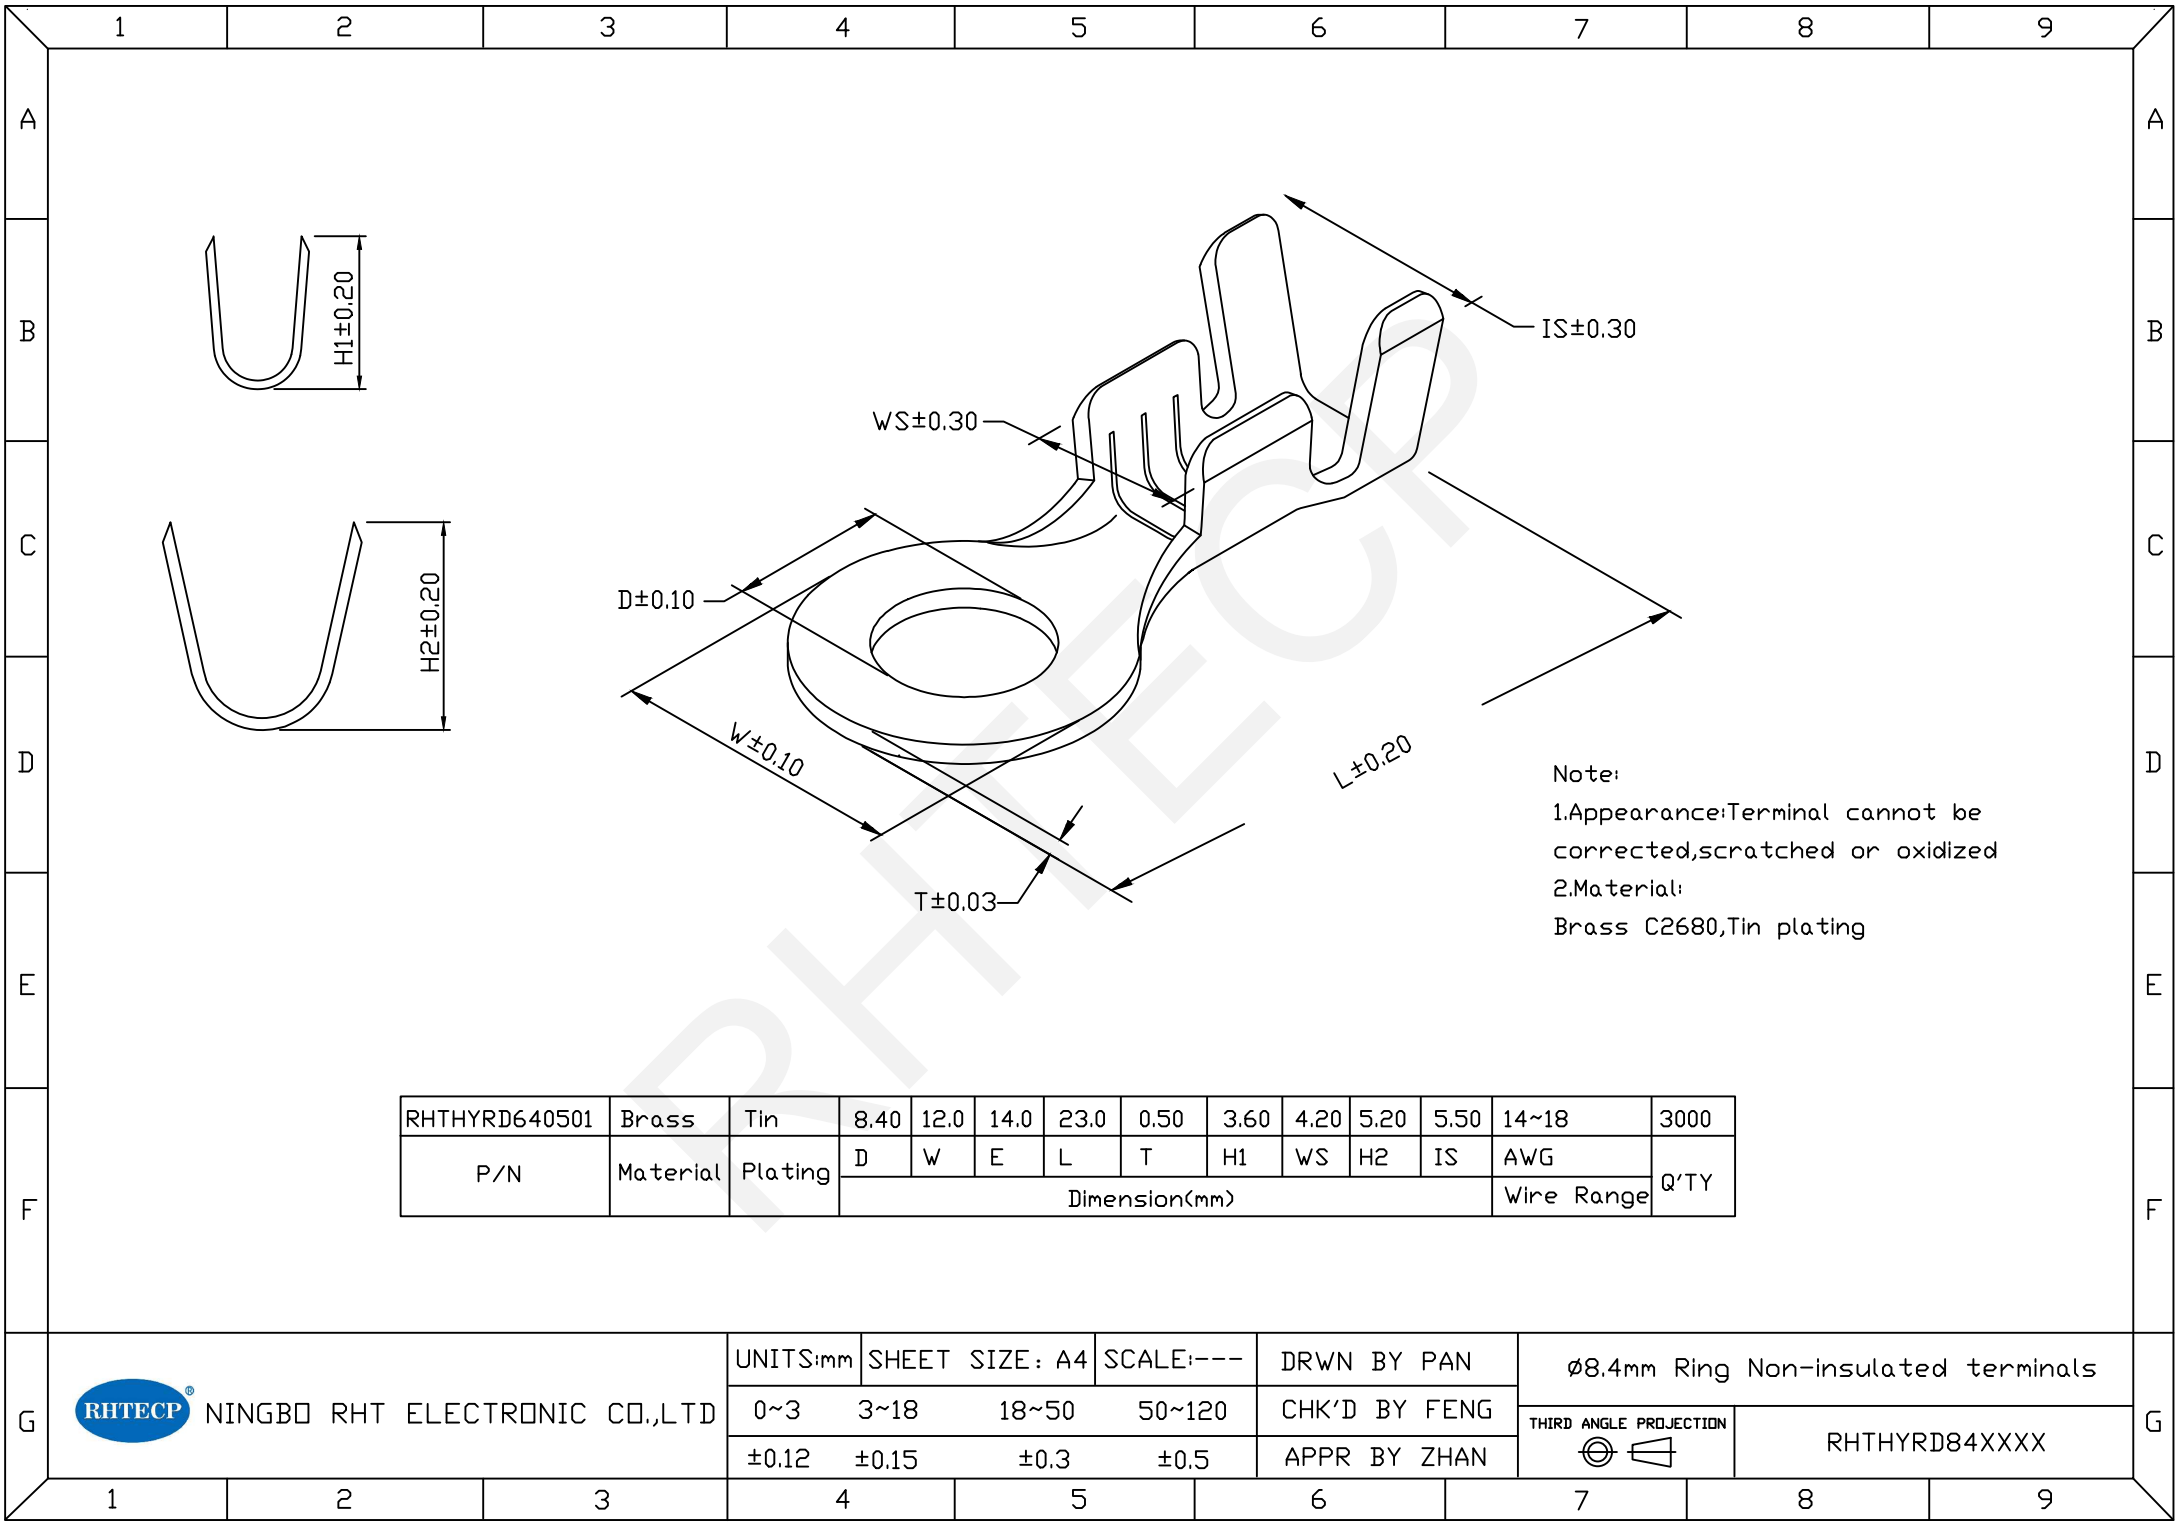

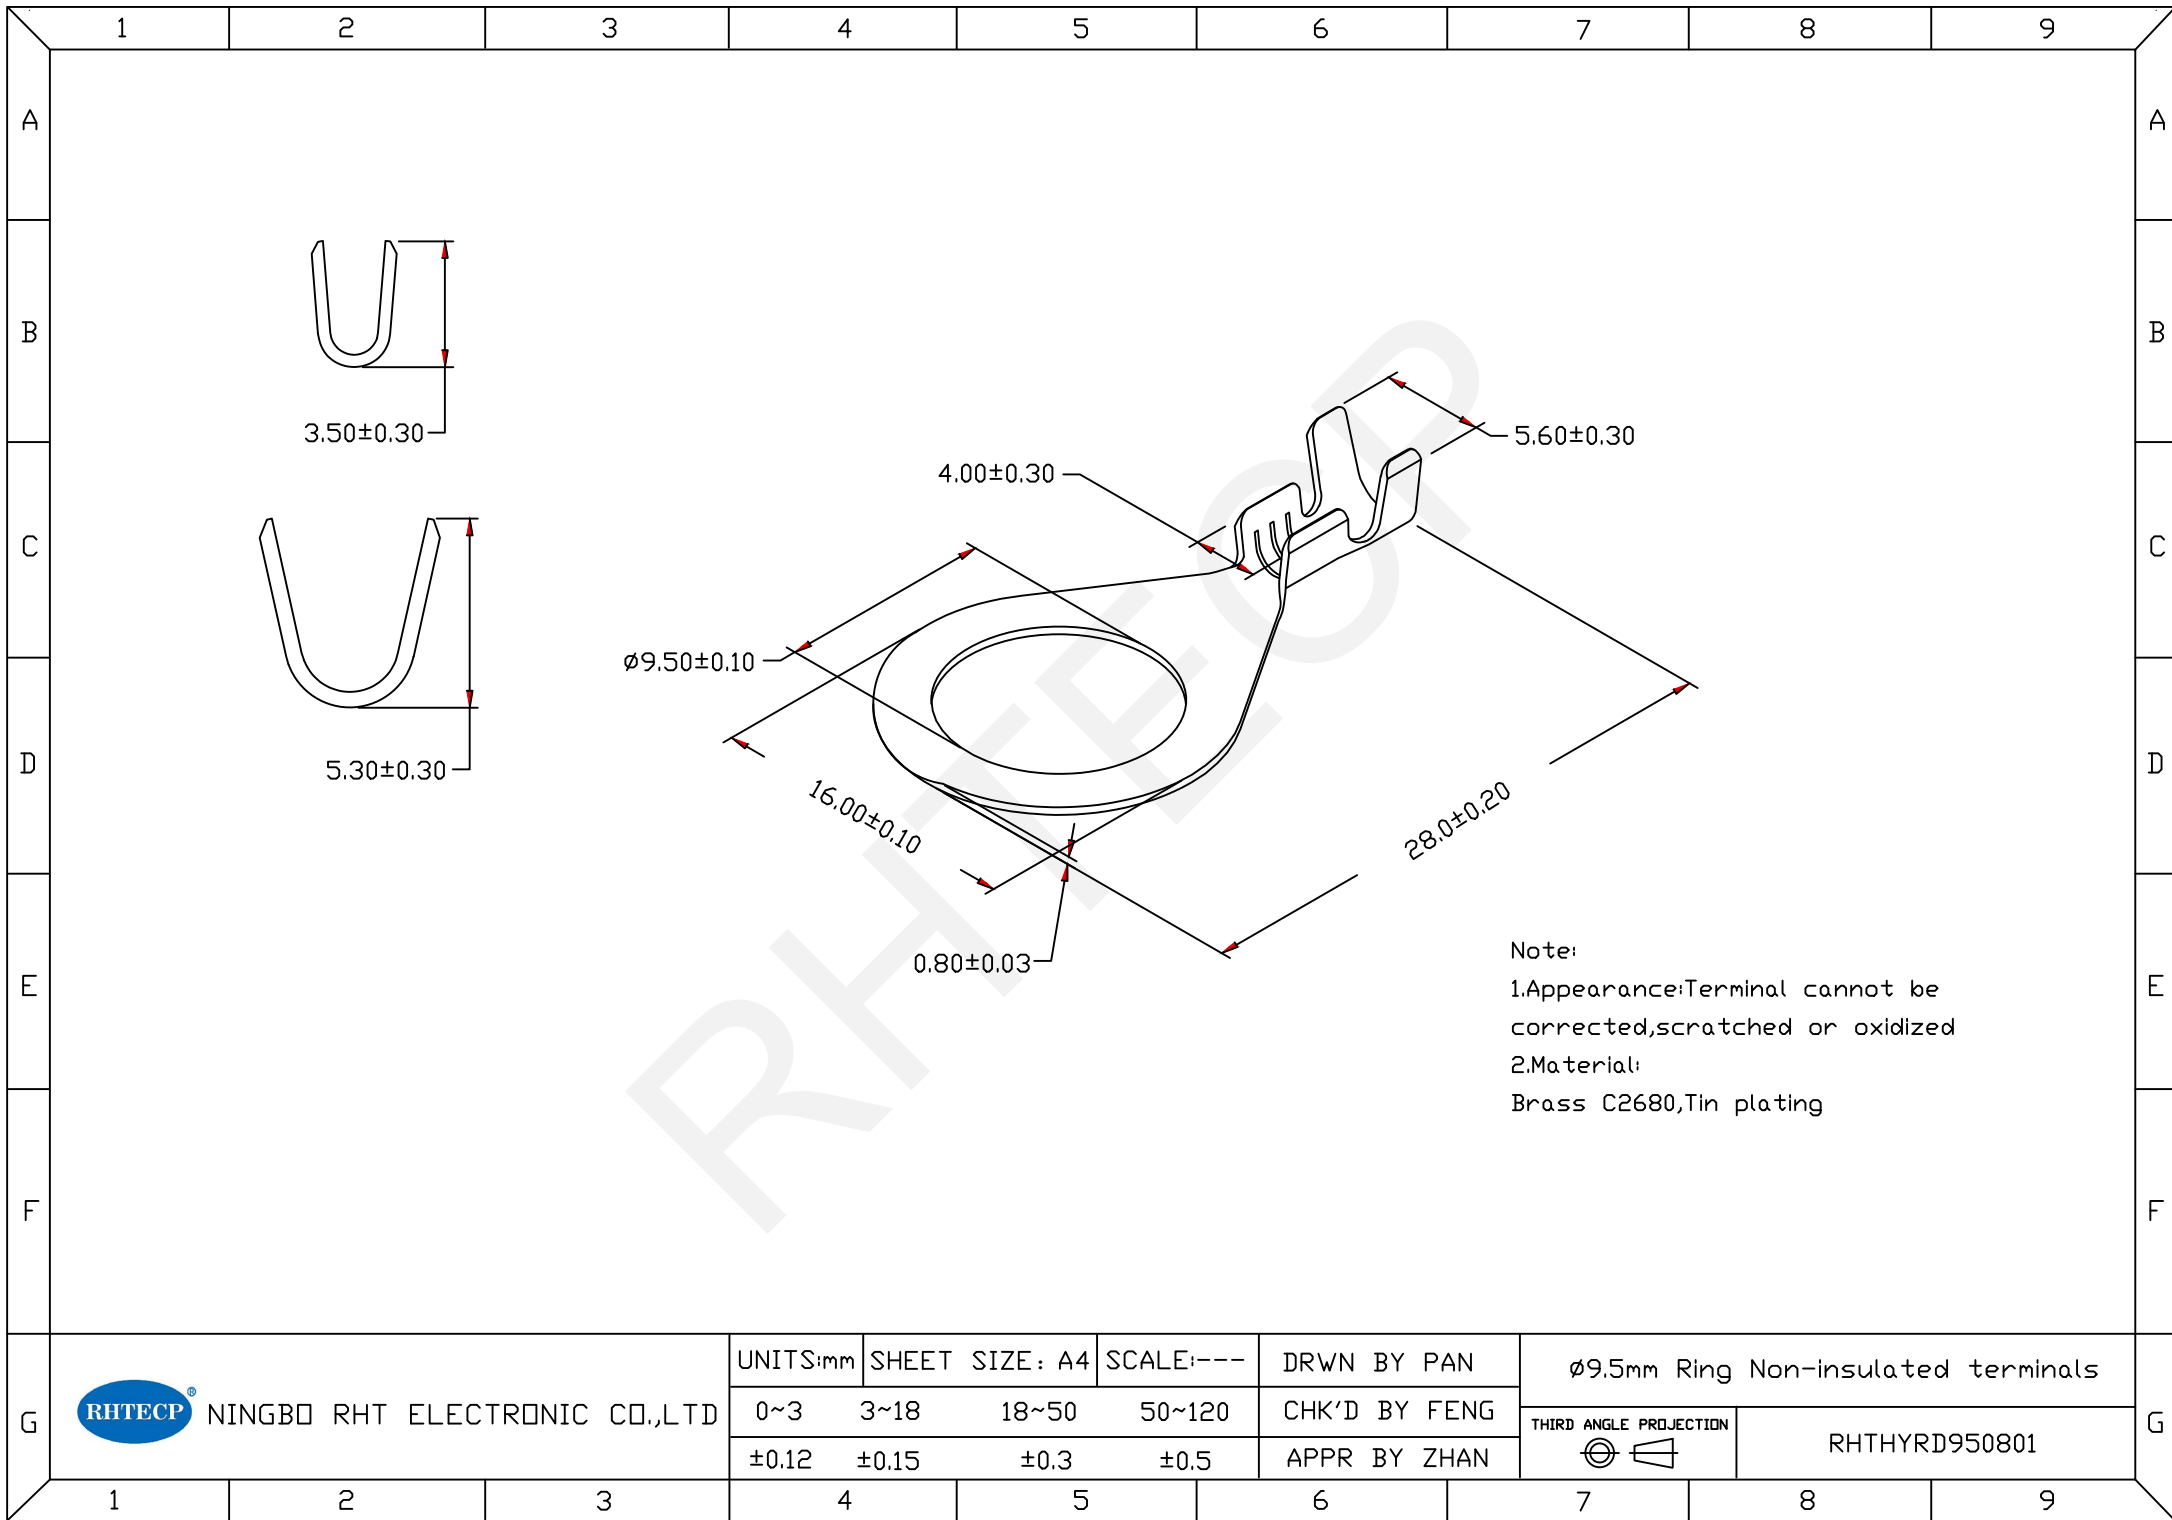


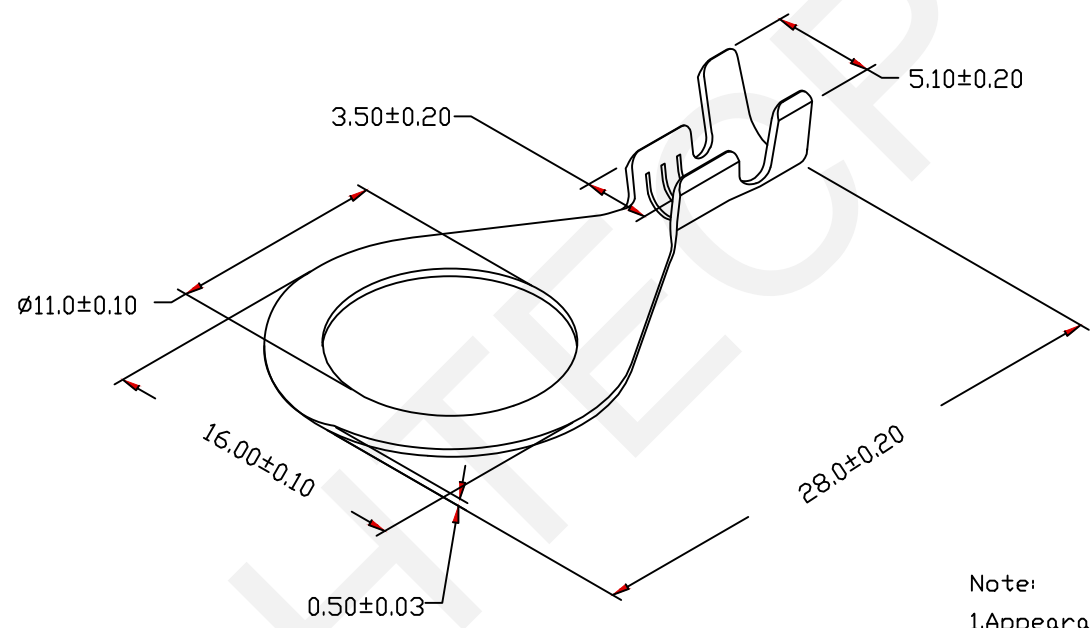


Note:
1.Appearance:Terminal cannot be corrected,scratched or oxidized
2.Material:
Brass C2680,Tin plating




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm		SHEET SIZE: A4		SCALE:---	DRWN BY PAN	Ø11.0mm Ring Non-insulated terminals	
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 		
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN			

RHTHYRD110501

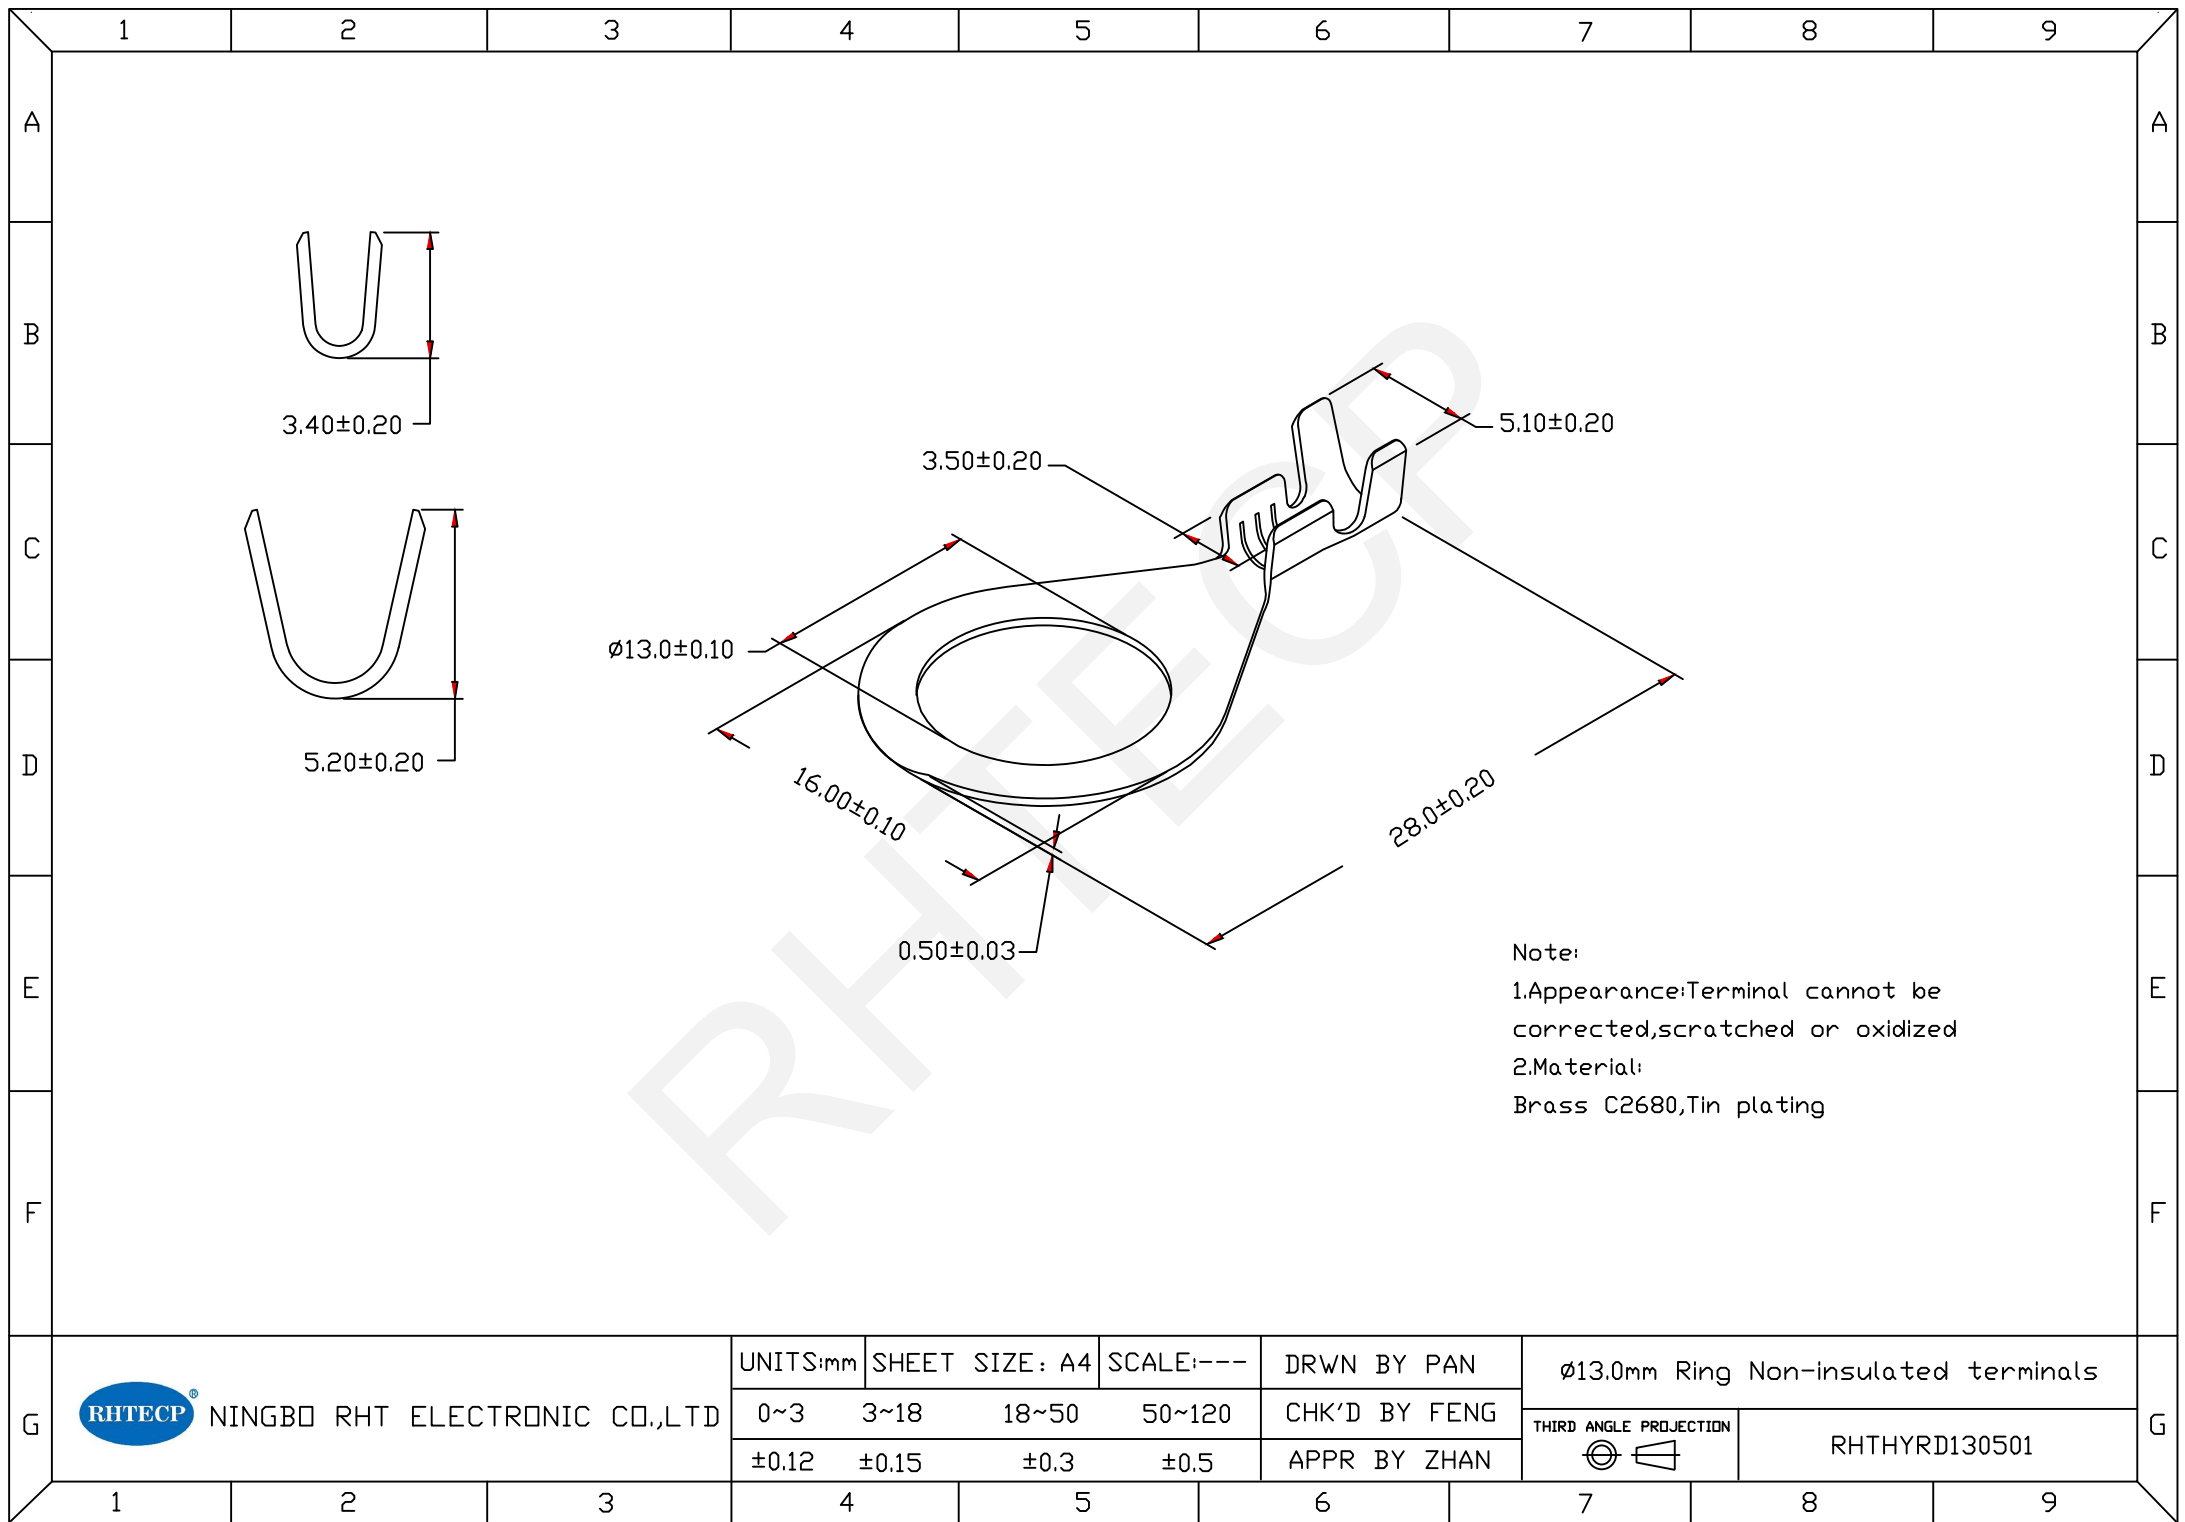


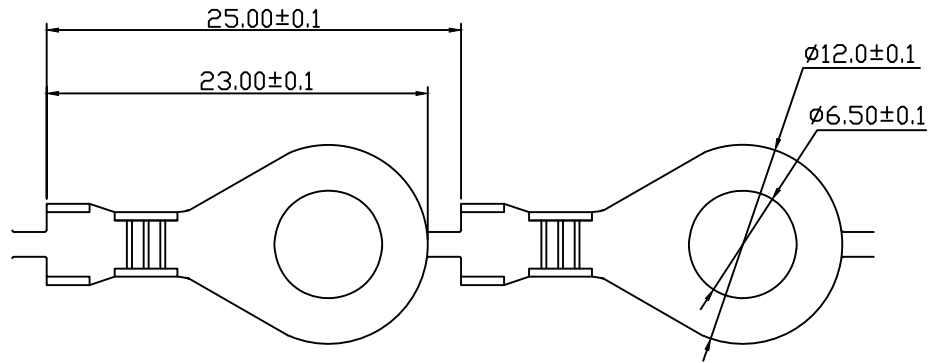


Technical requirement:

Material:H62,T=0.5, Tin Plating


The mark correct and lucid, terminal should be without fracture, burr, deformation and scratches.

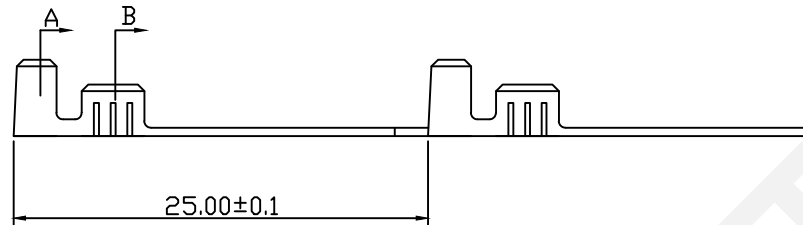

The surface coating should be uniform, sheeny, without midew spot, blackening, delamination and any other defects.



SECTION A-A



SECTION B-B

Products bending parts should not have any mechanical damages and not easy to break, the incision burr≤0.2 mm

Packing:5000PCS/Reel



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Cold Pressed Terminal

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTHYRD650802-6A