
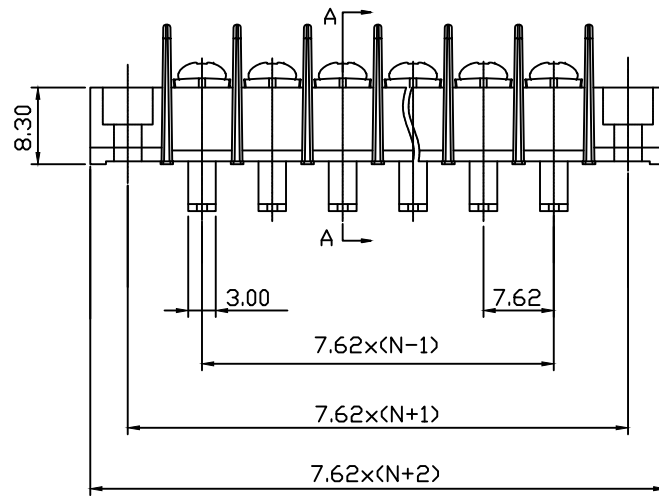


SECTION A-A

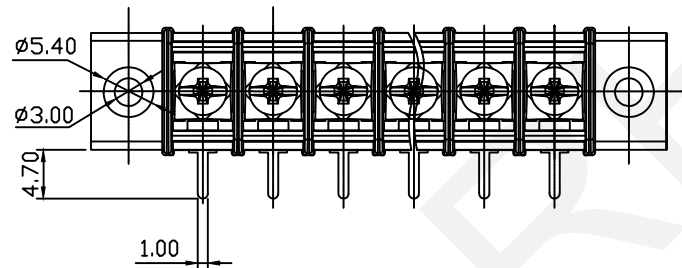

#### Order Information

RHTBYB5 R-7.62-XXP-A

Barrier Terminal Block  
without Cover

Pin Type: \_\_\_\_\_

Pitch 7.62mm \_\_\_\_\_

No. of Pole \_\_\_\_\_

Aw with Ears \_\_\_\_\_

#### Material

Screw: M3.0, Steel, Ni Plated

Pin header: Brass, 0.8t, Tin Plated

Housing: PA66, UL94V-0, Black

#### Electrical

Rated voltage: 300V

Rated current: 15A

Wire range: 22~14AWG 2.5mm<sup>2</sup>

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V/1min

#### Mechanical

Temp. Range: -40℃~+105℃

Torque: 0.5Nm (4.5Lb.in)



NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Barrier TERM BLOCK 7.62MM

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBYB5R-7.62-XXP-A


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9