

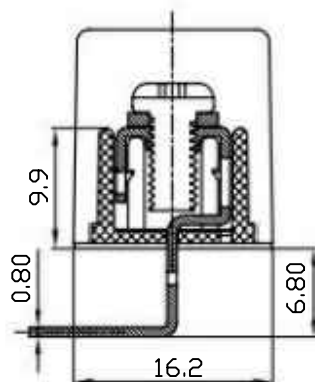


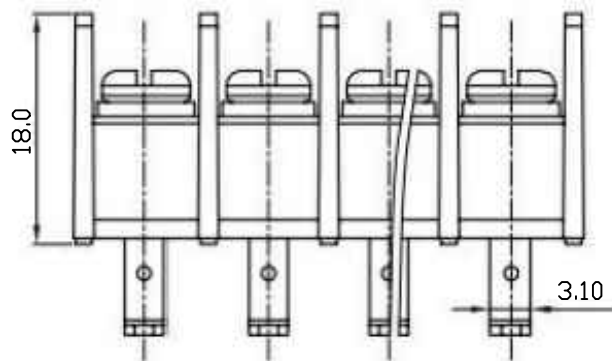

SECTION A-A

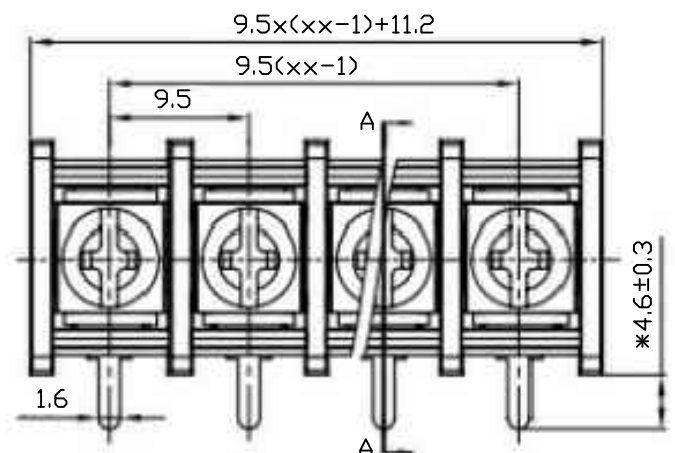

Order Information

RHTBY5 R-9.50-XXP-B

Barrier Terminal Block
without Cover

Pin Type:

Pitch: 9.50mm

No. of Pole

B: without Ears

Material

Screw: M4.0, Steel, Ni Plated

Pin header: Brass, 0.8t, Tin Plated

Housing: PA66, UL94V-0, Black

Electrical

Rated voltage: 300V

Rated current: 20A

Wire range: 22~14AWG 2.5mm²

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V/1min

Mechanical

Temp. Range: -40℃~+105℃

Torque: 1.2Nm (10.6Lb.in)

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

Barrier TERM BLOCK 9.50MM	
THIRD ANGLE PROJECTION	RHTBY5R-9.50-XXP-B

