
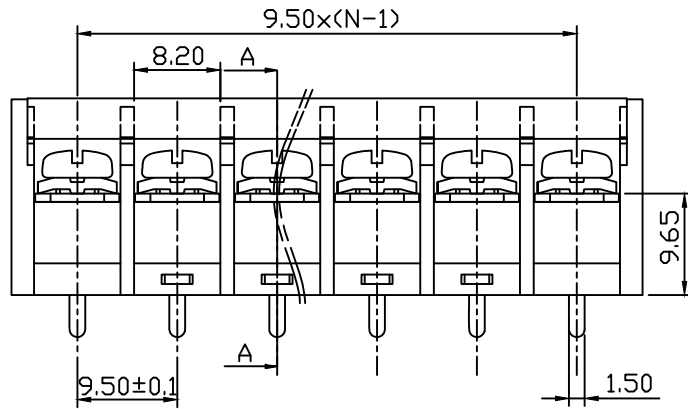


SECTION A-A

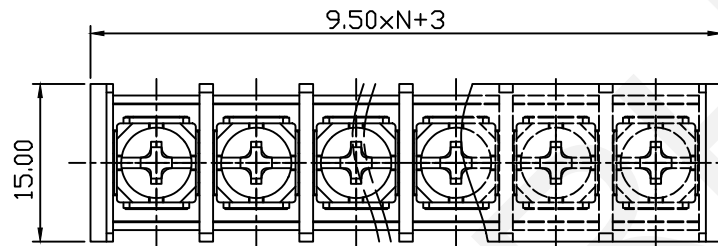

#### Order Information

RHTBY8 A-9.50-XXP-B

Barrier Terminal Block  
with Cover

Pin Type: \_\_\_\_\_

Pitch: 9.50mm \_\_\_\_\_

No. of Pole \_\_\_\_\_

B: without Ears \_\_\_\_\_

#### Material

Screw: M4.0, Steel, Ni Plated

Pin header: Brass, 0.8t, Tin Plated

Housing: PA66, UL94V-0, Black

#### Electrical

Rated voltage: 300V

Rated current: 20A

Wire range: 22~12AWG 4mm<sup>2</sup>

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V/1min

#### Mechanical

Temp. Range: -40℃~+105℃

Torque: 1.2Nm (10.6Lb.in)



NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Barrier TERM BLOCK 9.50MM

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTBY8A-9.50-XXP-B

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN