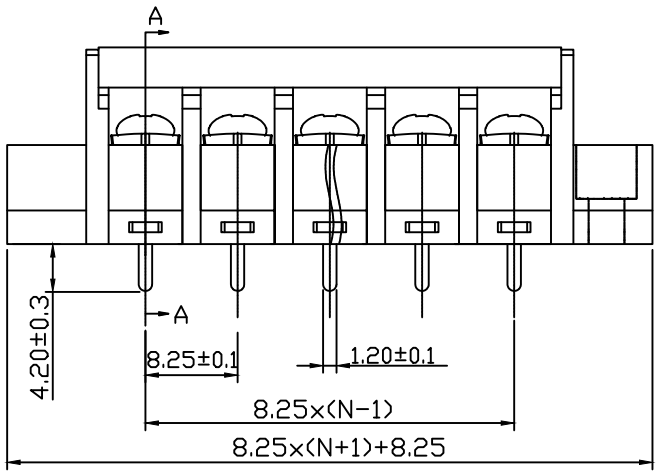

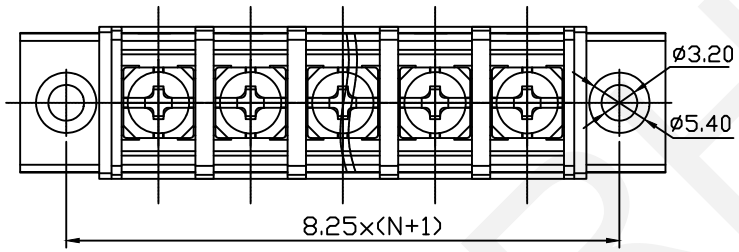



SECTION A-A

Order Information

RHTBYD8 A-8.25-XXP-A

- Barrier Terminal Block with Cover
- Pin Type:
- Pitch: 8.25mm
- No.:of Pole
- B:with Ears

Material

Screw:M3.0,Steel, Ni Plated

Pin header:Brass,0.8t, Tin Plated

Housing:PA66,UL94V-0,Black

Electrical

Rated voltage: 300V

Rated current:15A

Wire range:22~14AWG 2.5mm²

Contact Resistance: 20 mΩ

Insulation resistance:500MΩ/DC500V

Withstand voltage:AC2000V/1min

Mechanical

Temp. Range:-40℃~+105℃

Torque:0.5Nm(4.5Lb.in)

RHTECP NINGBO RHT ELECTRONIC CO.,LTD	UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	Barrier TERM BLOCK 8.25MM	
	0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION
	±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	RHTBYD8A-8.25-XXP-A