
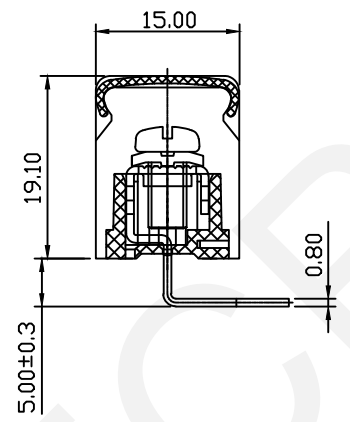
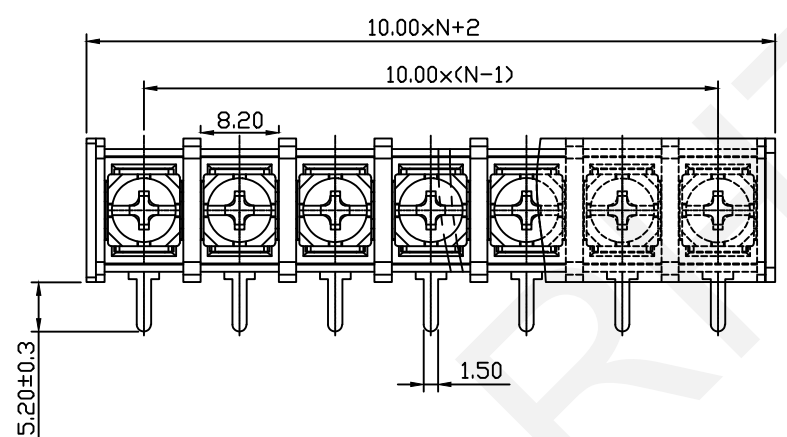


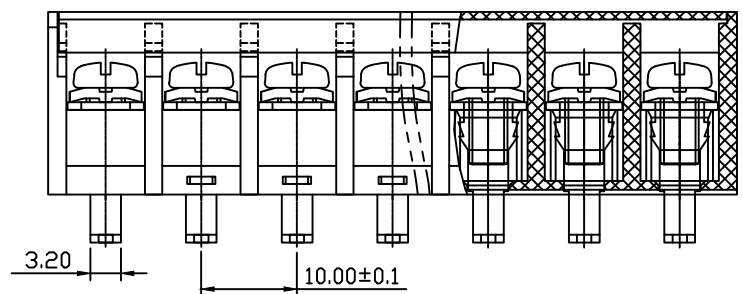

SECTION A-A

Order Information
RHTBY8 R-10.0-XXP-B

Barrier Terminal Block —
with Cover
Pin Type: _____
Pitch: 10.0mm
No. of Pole _____
B: without Ears

Material
Screw: M4.0, Steel, Ni Plated
Pin header: Brass, 0.8t, Tin Plated
Housing: PA66, UL94V-0, Black

Electrical
Rated voltage: 300V
Rated current: 20A
Wire range: 22~12AWG 4mm²
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V/1min

Mechanical
Temp. Range: -40℃~+105℃
Torque: 1.2Nm (10.6Lb.in)

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN