
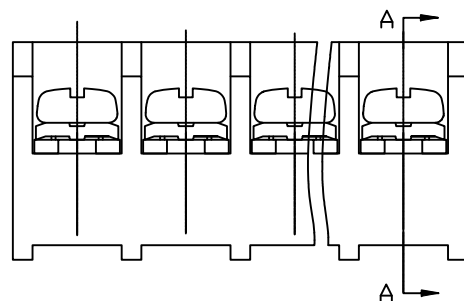
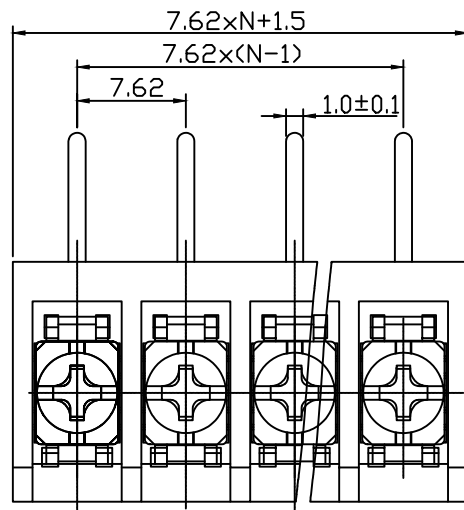


PCB LAYOUT

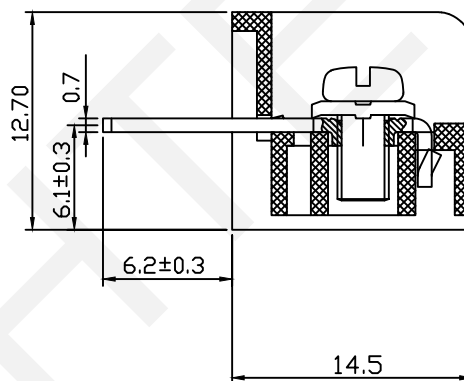

SECTION A-A

Material
Screw:M3,Steel, Ni Plated
Pin header:Brass,Tin Plated
Housing:PA66,UL 94V-0,Black

Electrical
Rated voltage: 300V
Rated current:10A
Wire range:22~16AWG 1.5mm²
Contact Resistance: 20 mΩ
Insulation resistance:500MΩ/DC500V
Withstand voltage:AC2000V/1min

Mechanical
Temp. Range:-40℃~+105℃
Torque:0.5Nm(4.43Lb.in)

Order Information

RHTBY6 F-7.62-XXP-B

Barrier Terminal Block

Pin Type:

Pitch: 7.62mm

No. of Pole

Color: B-Black

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Barrier TERM BLOCK 7.62MM

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTBY6F-7.62-XXP-B

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN