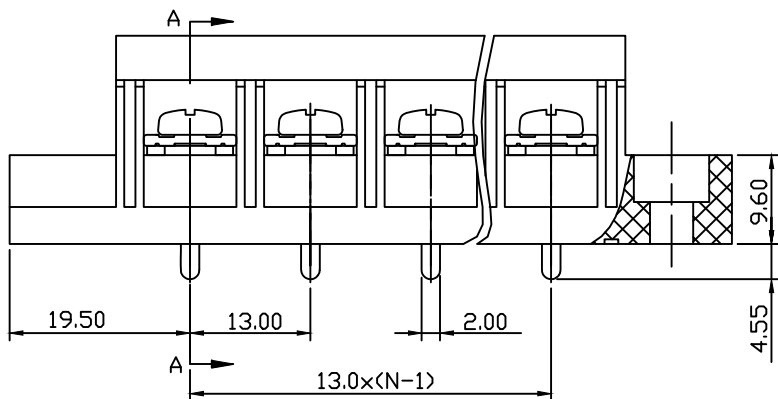


SECTION A-A

Material

Screw:M4.0,Steel, Ni Plated

Pin header:Brass,1.0t, Tin Plated

Housing:PA66,UL94V-0,Black

Electrical

Rated voltage: 600V

Rated current:40A

Wire range:18~10AWG 6mm²

Contact Resistance: 20 mΩ


Insulation resistance:500MΩ/DC500V

Withstand voltage:AC2000V/1min

Mechanical

Temp. Range:-40℃~+105℃

Torque:1.2Nm(10.6Lb.in)

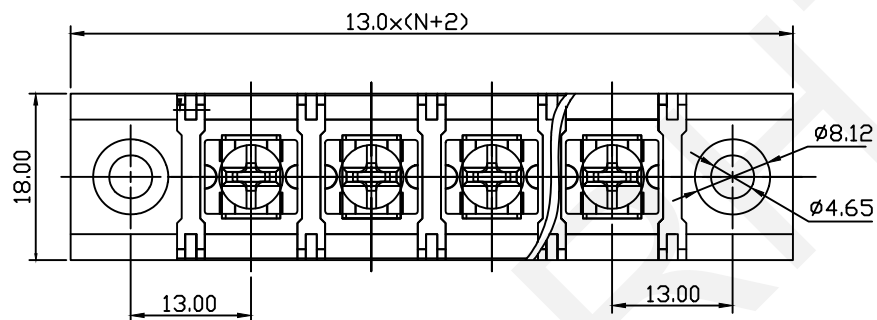

Order Information

RHTBYD8 A-13.0-XXP-A

Barrier Terminal Block
with Cover

Pin Type:

Pitch: 13.0mm

No. of Pole

A:with Ears



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN

Barrier TERM BLOCK 13.0MM

THIRD ANGLE PROJECTION



RHTBYD8A-13.0-XXP-A