
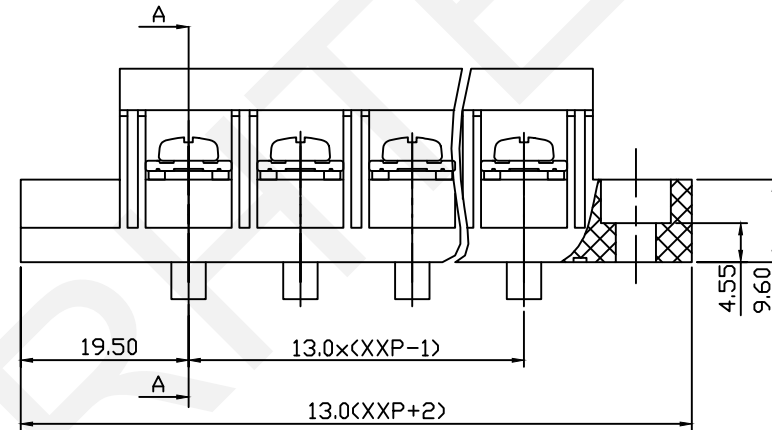

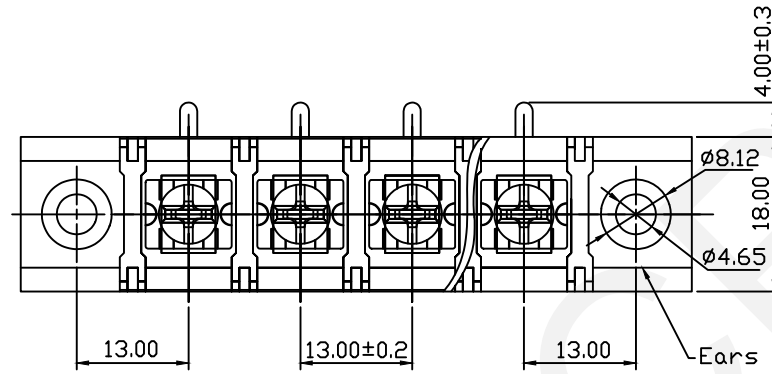


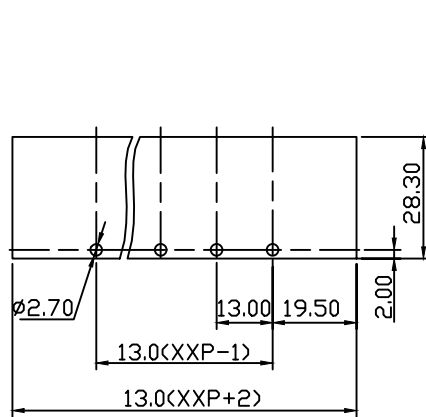

Material and other:
Housing:PA66, UL94V-0
Screw:Steel,M4/NiPlated
Pin:Copper Alloy, Tin Plated
Cover:PC,UL94V-2
Torque:1.2N.m
Operating Temperature:-40°C~+105°C
Max Soldering:250°C,For 5s

Order Information

RHTBYD8 R-13.0-05P-A

Terminal Block

R-Right angle pin

Pin Type:

Pitch: 13.0mm

No.:of(02~20)Pin

A=with Ears

Electrical Characteristics	UL	IEC
Rated Voltage	600V	750V
Rated Current	30A	32A
Withstand Voltage	2000V/1min	---
Wire Range	18~10 AWG	4.0mm ²



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN

Barrier TERM BLOCK 13.0MM

THIRD ANGLE PROJECTION



RHTBYD8R-13.0-XXP-A