
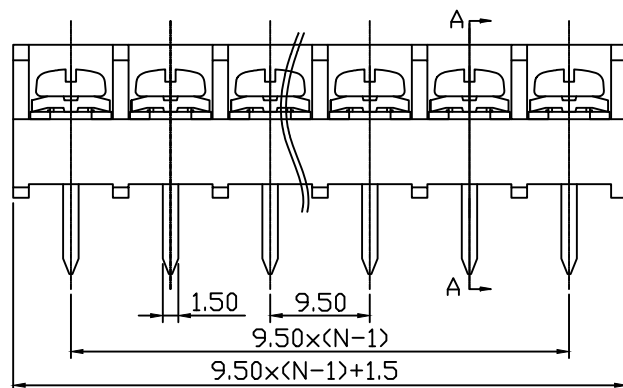
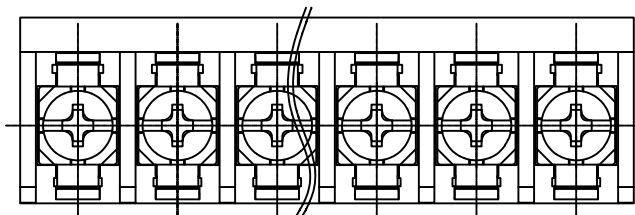


PCB LAYOUT



SECTION A-A

Material

Screw:M4.0,Steel, Ni Plated

Pin header:Brass,Tin Plated

Housing:PA66,UL94V-0,Black

Electrical

Rated voltage: 300V

Rated current:20A

Wire range:22~12AWG 2.5mm²

Contact Resistance: 20 mΩ

Insulation resistance:500MΩ/DC500V

Withstand voltage:AC2000V/1min

Mechanical

Temp. Range:-40℃~+105℃

Torque:1.2Nm(10.6Lb.in)

Order Information

RHTBY6 B-9.50-XXP-B

Barrier Terminal Block

Pin Type:

Pitch: 9.50mm

No. of Pole

Color: B-Black

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Barrier TERM BLOCK 9.50MM

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBY6B-9.50-XXP-B

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9