
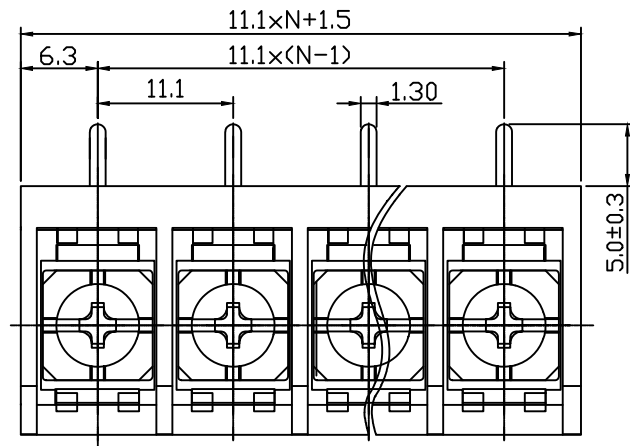


SECTION A-A

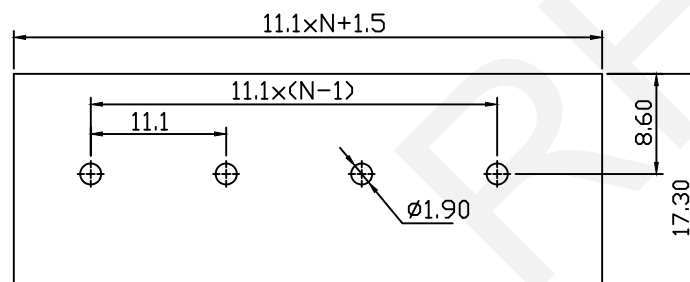

PCB LAYOUT

Material
Screw:M4.0,Steel, Ni Plated
Pin header:Brass,Tin Plated
Housing:PA66,UL94V-0,Black

Electrical
Rated voltage: 300V
Rated current:30A
Wire range:22~10AWG 4.0mm²
Contact Resistance: 20 mΩ
Insulation resistance:500MΩ/DC500V
Withstand voltage:AC2000V/1min

Mechanical
Temp. Range:-40℃~+105℃
Torque:1.2Nm(10.6Lb.in)

Order Information
RHTBY6 B-11.0-XXP-B


Barrier Terminal Block
Pin Type: _____
Pitch: 11.1mm _____
No. of Pole _____
Color: B-Black _____

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Barrier TERM BLOCK 11.1MM



RHTBY6F-11.0-XXP-B