
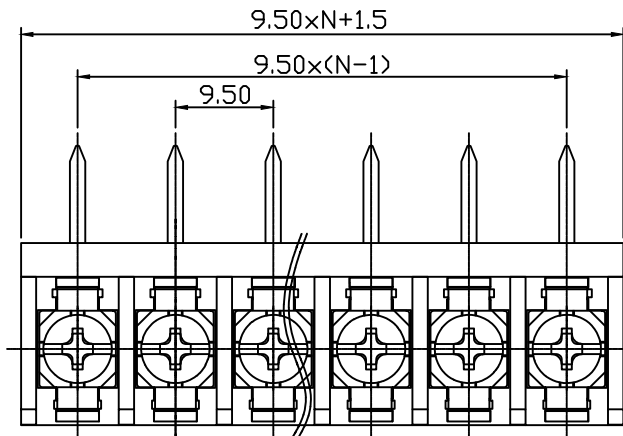


SECTION A-A

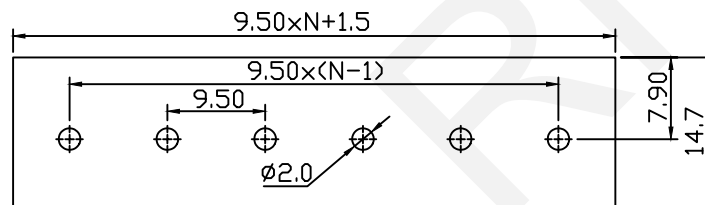

PCB LAYOUT

Material
Screw:M4.0,Steel, Ni Plated
Pin header:Brass,Tin Plated
Housing:PA66,UL94V-0,Black

Electrical
Rated voltage: 300V
Rated current:20A
Wire range:22~12AWG 2.5mm²
Contact Resistance: 20 mΩ
Insulation resistance:500MΩ/DC500V
Withstand voltage:AC2000V/1min

Mechanical
Temp. Range:-40℃~+105℃
Torque:1.2Nm(10.6Lb.in)

Order Information

RHTBY6 F-9.50-XXP-B

Barrier Terminal Block

Pin Type: _____

Pitch: 9.50mm _____

No. of Pole _____

Color: B-Black _____

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Barrier TERM BLOCK 9.50MM

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBY6F-9.50-XXP-B

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9