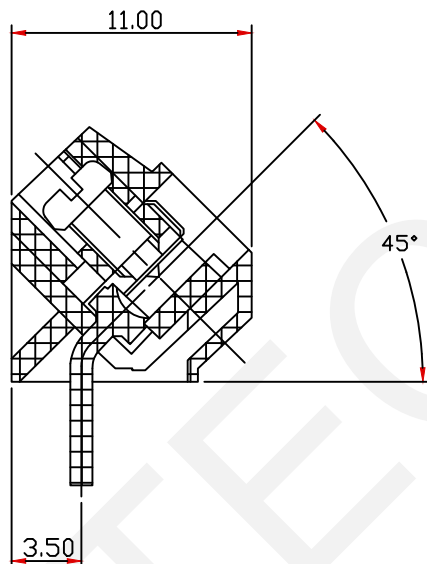
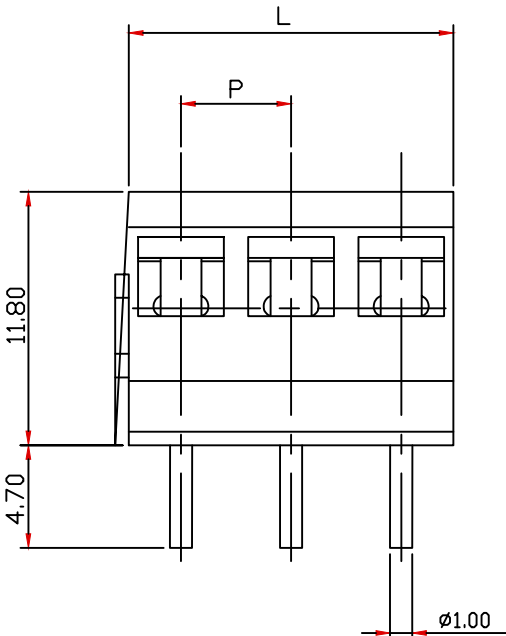


PCB LAYOUT

P=5.00mm
Length(L)=P×Pole

Material
Housing:PA66, UL94V-0
Pin header: Brass,Tin plate
Contact:Brass,Electroless nickel
Screws:M2.5, Steel,Zinc plated

Electrical
Rated voltage:300V
Rated current: 15A
Wire range:24~14AWG 2.5mm²
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V/1min

Mechanical
Temp.Range: -40℃~+105℃
Soldering: 250℃ For 5Sec
Torque: 0.5 N.m (4.5Lb. in)
Strip length: 6~7mm


Order Information
RHTBY04-5.00-XXP-4 S XX
Terminal Block—
Pitch—
No. of Pole —
Color:4-Green—
Screw: S-Slot Screw—
Product Code: 00~99—



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

PCB Terminal block 5.0mm Pitch



RHTBY04-5.00-XXP-4S