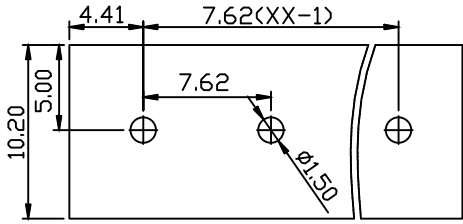
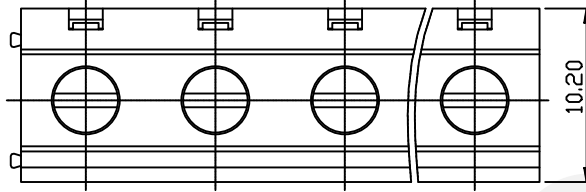
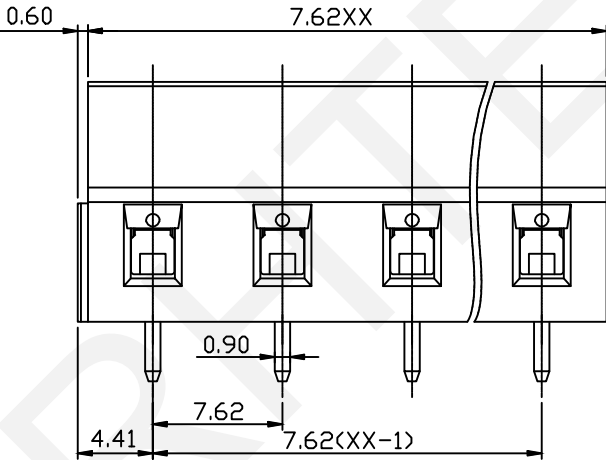
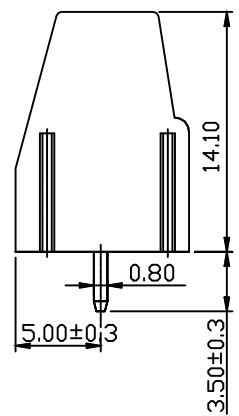





1		2		3		4		5		6		7		8		9																																																																																																														
													UL/CUL Technical Data																																																																																																																	
 P.C.B LAYOUT   <table><tr><td>Use Group</td><td>B</td><td>C</td><td>D</td></tr><tr><td>Rated Voltage [V]</td><td>300</td><td>-</td><td>300</td></tr><tr><td>Rated Current [A]</td><td>16</td><td>-</td><td>10</td></tr><tr><td>Wire Range</td><td colspan="3">22-12</td></tr><tr><td>Solid/Stranded[AWG]</td><td colspan="3"></td></tr><tr><td>Withstanding Voltage</td><td colspan="3">1600V/1Min</td></tr><tr><td>IEC Technical Data</td><td colspan="3">IEC60947-7-4</td></tr><tr><td>Overvoltage Category</td><td>III</td><td>III</td><td>II</td></tr><tr><td>Contamination Class</td><td>3</td><td>2</td><td>2</td></tr><tr><td>Rated Voltage [V]</td><td>450</td><td>630</td><td>1000</td></tr><tr><td>Rated Current [A]</td><td>20</td><td>20</td><td>20</td></tr><tr><td>Impulse Withstand Voltage [KV]</td><td>6.0</td><td>6.0</td><td>6.0</td></tr><tr><td>Conductor Cross Section</td><td colspan="3">0.5-2.5</td></tr><tr><td>Solid/Flexible [mm²]</td><td colspan="3"></td></tr><tr><td>Material</td><td colspan="3">PA66</td></tr><tr><td>Insulation Material</td><td colspan="3">PA66</td></tr><tr><td>Flammability</td><td colspan="3">UL94V-0</td></tr><tr><td>Conductor Material</td><td colspan="3">Copper Alloy</td></tr><tr><td>Conductor Plating</td><td colspan="3">Sn Plated</td></tr><tr><td>Other Data</td><td colspan="3"></td></tr><tr><td>Pitch/Poles [mm]/[P]</td><td colspan="3">7.62/02~24</td></tr><tr><td>Stripping Length [mm]</td><td colspan="3">6~7</td></tr><tr><td>Screw/ Torque(Max)[N.m]</td><td colspan="3">M2.5/0.4</td></tr><tr><td>Operating Temperature [°C]</td><td colspan="3">-40~105</td></tr><tr><td>Soldering Temperature</td><td colspan="3">260°C/5S</td></tr><tr><td>Pin Dimensions [mm]</td><td colspan="3">0.8*0.9</td></tr><tr><td>PCB Hole Diameter [mm]</td><td colspan="3">ø1.5</td></tr></table>																	Use Group	B	C	D	Rated Voltage [V]	300	-	300	Rated Current [A]	16	-	10	Wire Range	22-12			Solid/Stranded[AWG]				Withstanding Voltage	1600V/1Min			IEC Technical Data	IEC60947-7-4			Overvoltage Category	III	III	II	Contamination Class	3	2	2	Rated Voltage [V]	450	630	1000	Rated Current [A]	20	20	20	Impulse Withstand Voltage [KV]	6.0	6.0	6.0	Conductor Cross Section	0.5-2.5			Solid/Flexible [mm²]				Material	PA66			Insulation Material	PA66			Flammability	UL94V-0			Conductor Material	Copper Alloy			Conductor Plating	Sn Plated			Other Data				Pitch/Poles [mm]/[P]	7.62/02~24			Stripping Length [mm]	6~7			Screw/ Torque(Max)[N.m]	M2.5/0.4			Operating Temperature [°C]	-40~105			Soldering Temperature	260°C/5S			Pin Dimensions [mm]	0.8*0.9			PCB Hole Diameter [mm]	ø1.5				
																	Use Group	B	C	D																																																																																																										
																	Rated Voltage [V]	300	-	300																																																																																																										
																	Rated Current [A]	16	-	10																																																																																																										
																	Wire Range	22-12																																																																																																												
																	Solid/Stranded[AWG]																																																																																																													
																	Withstanding Voltage	1600V/1Min																																																																																																												
																	IEC Technical Data	IEC60947-7-4																																																																																																												
																	Overvoltage Category	III	III	II																																																																																																										
																	Contamination Class	3	2	2																																																																																																										
Rated Voltage [V]	450	630	1000																																																																																																																											
Rated Current [A]	20	20	20																																																																																																																											
Impulse Withstand Voltage [KV]	6.0	6.0	6.0																																																																																																																											
Conductor Cross Section	0.5-2.5																																																																																																																													
Solid/Flexible [mm²]																																																																																																																														
Material	PA66																																																																																																																													
Insulation Material	PA66																																																																																																																													
Flammability	UL94V-0																																																																																																																													
Conductor Material	Copper Alloy																																																																																																																													
Conductor Plating	Sn Plated																																																																																																																													
Other Data																																																																																																																														
Pitch/Poles [mm]/[P]	7.62/02~24																																																																																																																													
Stripping Length [mm]	6~7																																																																																																																													
Screw/ Torque(Max)[N.m]	M2.5/0.4																																																																																																																													
Operating Temperature [°C]	-40~105																																																																																																																													
Soldering Temperature	260°C/5S																																																																																																																													
Pin Dimensions [mm]	0.8*0.9																																																																																																																													
PCB Hole Diameter [mm]	ø1.5																																																																																																																													
 NINGBO RHT ELECTRONIC CO.,LTD <table><tr><td>UNITS:mm</td><td colspan="2">SHEET SIZE: A4</td><td colspan="2">SCALE:---</td><td>DRWN BY PAN</td><td colspan="2">TERMINAL BLOCK 7.62MM SCREW RISING CLAMP ROHS</td></tr><tr><td>0~3</td><td>3~18</td><td>18~50</td><td>50~120</td><td>CHK'D BY FENG</td><td colspan="2" rowspan="2"> THIRD ANGLE PROJECTION RHTBY28-7.62</td></tr><tr><td>±0.12</td><td>±0.15</td><td>±0.3</td><td>±0.5</td><td>APPR BY ZHAN</td></tr></table>																	UNITS:mm	SHEET SIZE: A4		SCALE:---		DRWN BY PAN	TERMINAL BLOCK 7.62MM SCREW RISING CLAMP ROHS		0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION RHTBY28-7.62		±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN																																																																																										
																	UNITS:mm	SHEET SIZE: A4		SCALE:---		DRWN BY PAN	TERMINAL BLOCK 7.62MM SCREW RISING CLAMP ROHS																																																																																																							
																	0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION RHTBY28-7.62																																																																																																								
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN																																																																																																																										
1		2		3		4		5		6		7		8		9																																																																																																														