


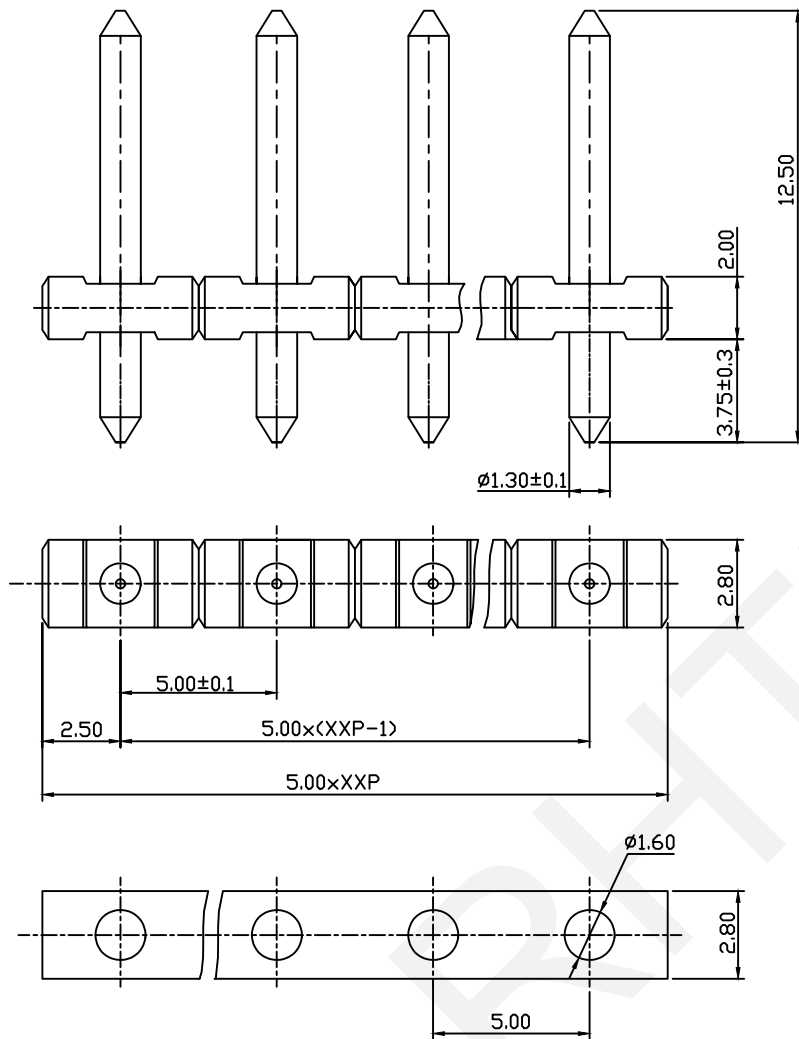

Material and other:
Housing: PBT, UL94V-0
Pin Header: Brass, Tin Plated
Contact Resistance: 20mΩ Max
Insulation Resistance: 500MΩ/DC500V Min
Temp. Range: -40°C~+105°C
MAX Soldering: 250°C For 5S

Order Information

RHTBY32J-5.00-XXP-X

Terminal Block

Pitch: 5.00mm

No. of (02~24) Pins

Color: 1=Gray 2=Blue 3=Black

4=Green 5=Orange 6=Red

7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	10A	18A
Withstand Voltage	AC2000V/1min	---

Recommended PCB Layout

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD


UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG

APPR BY ZHAN

Pitch 5.00mm Terminal Blocks

THIRD ANGLE PROJECTION



RHTBY32J-5.00-XXP-X