
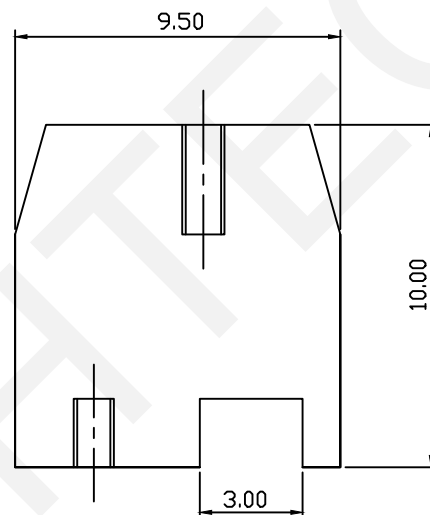
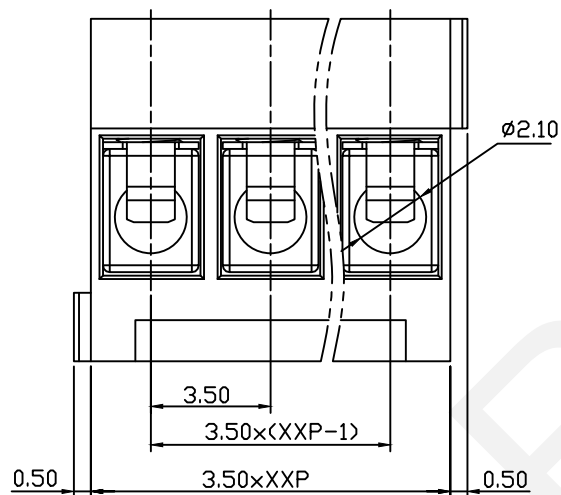


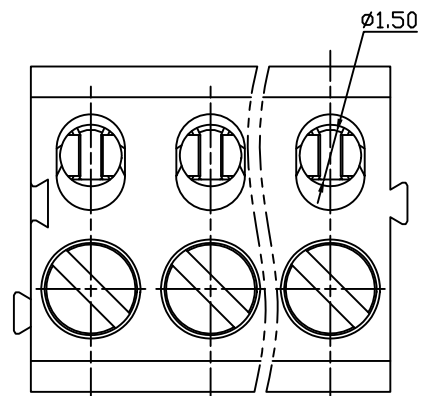


Material and other:
Housing: PA66, UL94V-0
Pin: Copper Alloy, Sn Plated
Screw/Torque: Steel, M2.0/0.2N.m Max
Steep Length: 5-6mm
Operating Temperature: -40°C~+105°C

Order Information

RHTBY33K-3.50-XXP-X X

Terminal Block
Pitch: 3.50mm
No. of (02~24) Pins
Color: 1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White
Screw: SC=Slot/Cross
S-Slot Screw C-Cross Screw



Electrical Characteristics	UL	IEC
Rated Voltage	300V	160V
Rated Current	8A	8A
Withstand Voltage	1600V/1min	2.5KV
Wire Range	16-28 AWG	0.2-1.0 mm ²


RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Pitch 3.50mm Screw fixation Terminal Block

THIRD ANGLE PROJECTION



RHTBY33K-3.50-XXP-XX