
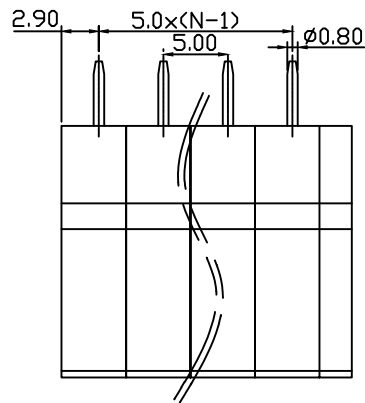
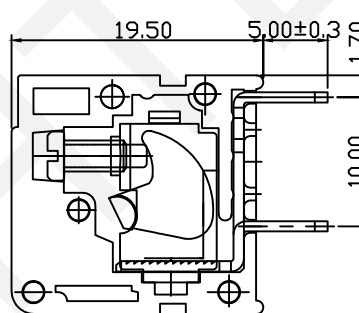


PCB LAYOUT

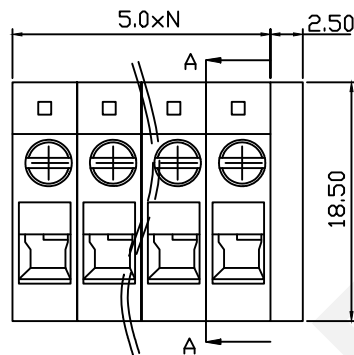

SECTION:A-A

Material

Housing:PA66,UL94V-0

Clamp:Steel Zinc plated

Pin Header:Brass,Tin plated

Screw:M2.5,steel Zinc plated

Electrical

Rated voltage:300V

Rated current:20A

Contact Resistance:20 mΩ

Insulation resistance:500MΩ/DC500V

Withstand voltage:AC2000V/1min

Wire Range:24~14AWG 2.5mm²

Mechanical

Temp. Range:-40°C~+105°C

Strip length:12~13mm

Torque:0.4Nm (3.5Lb.in)

Order Information

RHTBY47V-5.00-XXP-4 S 00

Terminal Block

Pitch

No. of Pole

Color:4-Green

Screw: S-Slot Screw

Product Code: 00~99

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Screw CONN TERM Block 5.00mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBY47V-5.00-XXP-4S


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9