
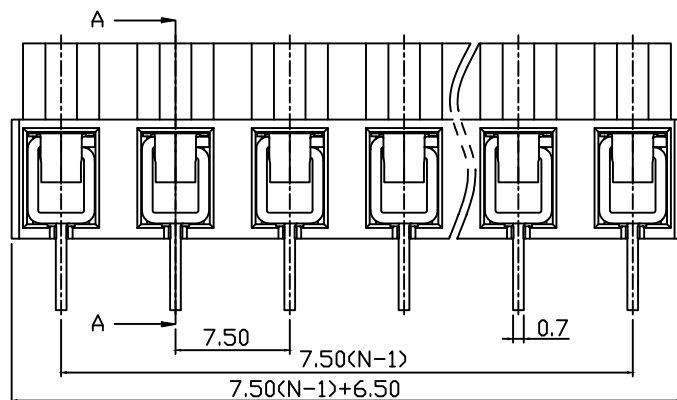
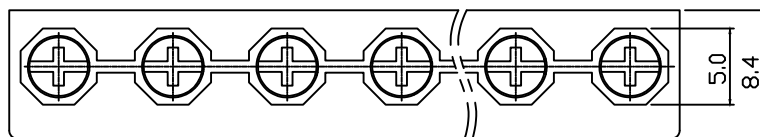


SECTION A-A

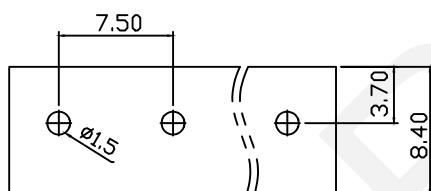

PCB LAYOUT

Material
Screw:M3, Steel,Zn plated
Shrapnel:Stainless steel,Nickel plated
Pin header: Brass,Tin plated
Housing:PA66, UL94V-0

Electrical
Rated voltage:300V
Rated current: 15A
Wire range:26~14AWG 2.5mm²
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V/1min

Mechanical
Temp.Range: -40℃~+105℃
Soldering: 250℃±5℃ For 5s
Torque: 0.5 N.m (4.43Lb. in)
Strip length: 6~7mm

Order Information

RHTBY66-7.50-XXP-4 S XX

Terminal Block

Pitch

No.of Pole

Color:4-Green

Screw: S-Slot Screw

Product Code: 00~99



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Screw Conn Term Block 7.50mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBY66-7.50-XXP-4S


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9