
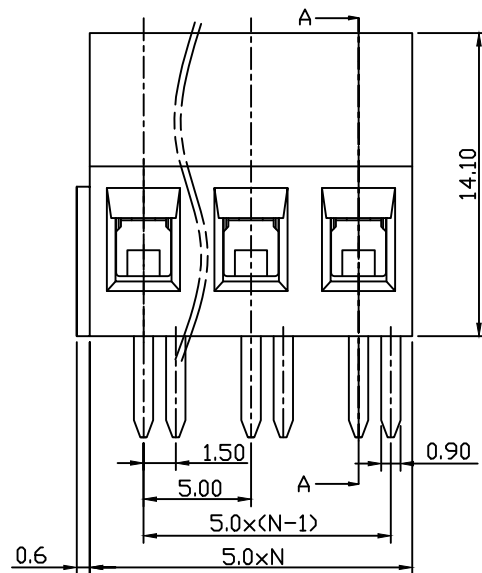


SECTION A-A

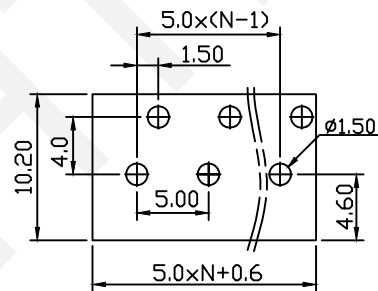

PCB Layout

Material
Housing:PA66,UL94V-0
Clamp:Brass Ni plated
Pin Header:Brass,Tin plated
Screw:M2.5,steel Zinc plated

Electrical
Rated voltage:300V
Rated current:16A
Contact Resistance:20 mΩ
Insulation resistance:500MΩ/DC500V
Withstand voltage:AC2000V/1min
Wire Range:22~12AWG 2.5mm²

Mechanical
Temp. Range:-40°C~+105°C
Strip length:6~7mm
Torque:0.4Nm (3.5Lb.in)

Order Information
RHTBY25D-5.00-XXP-4 S 00
Terminal Block
Pitch
No. of Pole
Color:4-Green
Screw: S-Slot Screw
Product Code: 00~99

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Screw CONN TERM Block 5.00mm

THIRD ANGLE PROJECTION

RHTBY28D-5.00-XXP-4S