
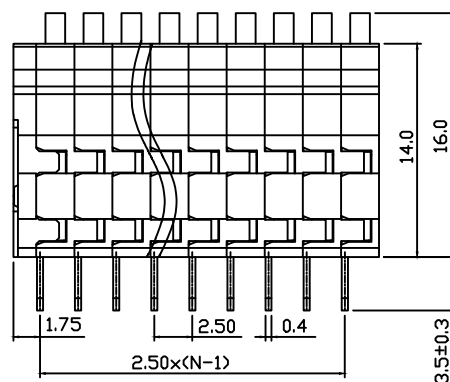
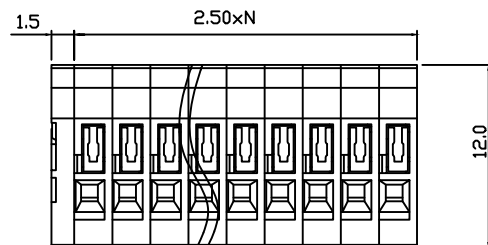


PCB LAYOUT



SECTION A-A

Material

Shrapnel: Stainless steel
Pin header: Brass, Tin plated
Housing: PA66, UL94V-0

Electrical

Rated Voltage: 150V
Rated Current: 5A
Wire range: 26~18AWG 1.0mm²
Contact Resistance: 20 mΩ
Insulation Resistance: 500MΩ/DC500V
Withstand voltage: AC1300V/1min

Mechanical

Temp. Range: -40°C~+105°C
Soldering: 250°C±5°C for 5S
Striplength: 9~10 mm

Order Information

RHTBY11V-2.50-XXP-4 XX

Terminal Block

Pitch

No. of Pole

Color: 4-Green

Product Code-00~99

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Spring Clamp Terminal Block 2.50mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTBY11V-2.50-XXP