
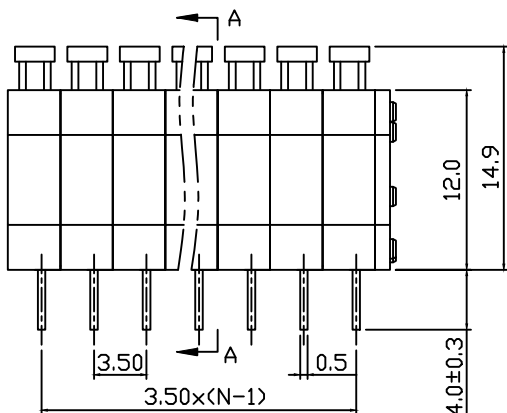
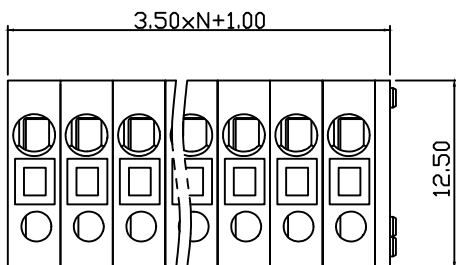


PCB LAYOUT

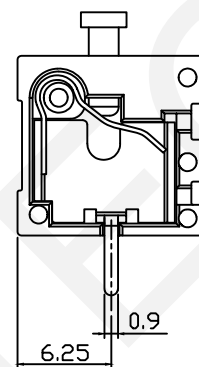

SECTION A-A

Material
 Shrapnel: Stainless steel
 Pin header: Brass , Tin plated
 Housing: PA66, UL94V-0
 Electrical
 Rated voltage: 300V
 Rated current: 8A
 Wire range: 26~18AWG 1.0mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC1300V/1min
 Mechanical
 Temp. Range: -40°C~+105°C
 Soldering: 250°C±5°C for 5S
 Strip length: 8~9 mm

Order Information

RHTBY11V-3.50-XXP-4 XX

Terminal Block

Pitch:

No. of Pole

Color: 4-GREEN

Product Code: 00~99

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Spring Clamp Terminal Block 3.50mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTBY11V-3.50-XXP