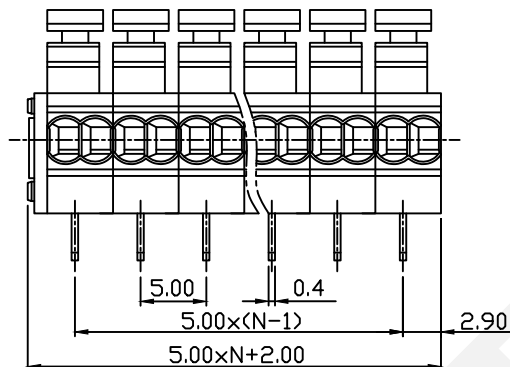

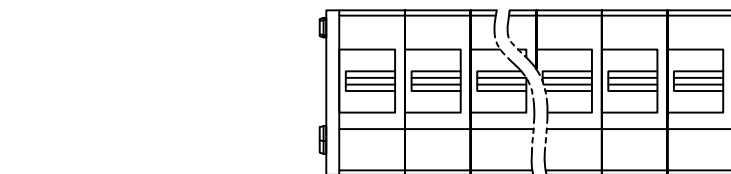


PCB LAYOUT

Material:

Housing: PA66, UL94V-0

Contact: Brass, Tin Plated

Shrapnel: Stainless Steel

Electrical:

Rated Voltage: 300V

Rated Current: 5A

Wire Range: 22~18 AWG 1.0mm²

Contact Resistance: 20mΩ

Insulation Resistance: 500MΩ / DC500V

Withstand Voltage: AC2000 V/1 min

Mechanical

Temp Range: -40°C~+105°C

Soldering: 250°C±5°C For 5s

Strip Length: 9~10 mm

Order Information

RHTBY35T-5.00-XXP-1-xx

Terminal Block

Pitch

No. of Pole

Color: 1=Gray

Product Code: 00~99

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Spring Clamp Terminal Block 5.00mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBY35T-5.00-XXP-1

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9