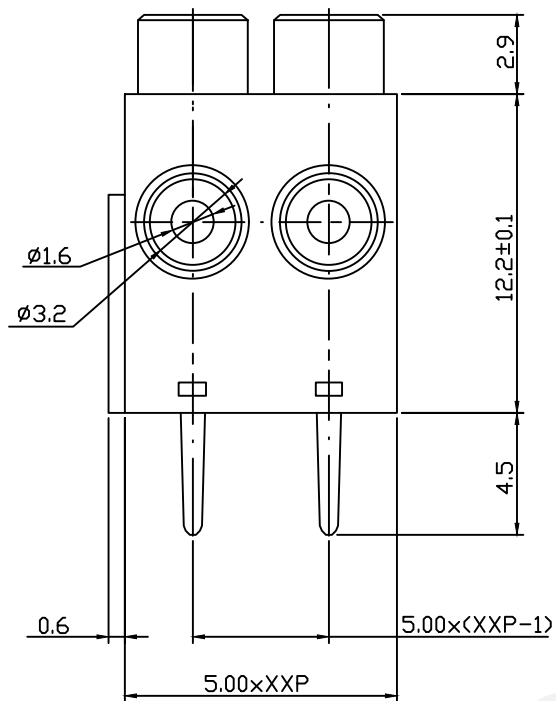


Material:
Housing:PBT,UL94V-0
Contact:Brass, Tin Plated
Shrapnel:Stainless Steel

Electrical:
Rated Voltage:300V
Rated Current:8A
Wire Range:22~18 AWG 1.0mm²
Contact Resistance:20mΩ
Insulation Resistance:500MΩ /DC500V
Withstand Voltage:AC2000 V/1 min
Strip Length:7~7.5 mm
Temp Range:-40°C~+105°C
Soldering:250°C±5°C For 5s

Order Information

RHTBY45R-5.00-XXP-2

Terminal Block

Pitch:5.00mm

No. of 02,03 Pole

Color:1=Gray 2=Blue

3=Black 4=Green 5=Orange

6=Red 7=Transp 8=Yellow 9=White


RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

5.00 Spring PCB Terminal Blocks

THIRD ANGLE PROJECTION



RHTBY45R-5.00-XXP-2