

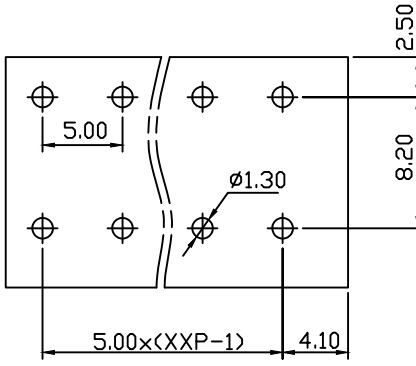
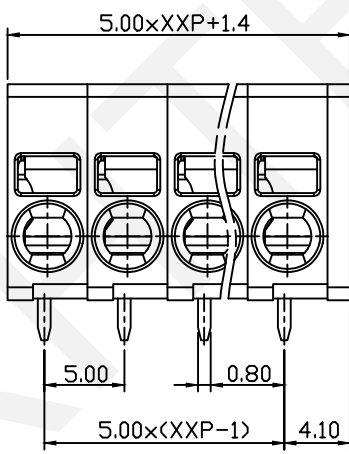




Recommended PCB Layout

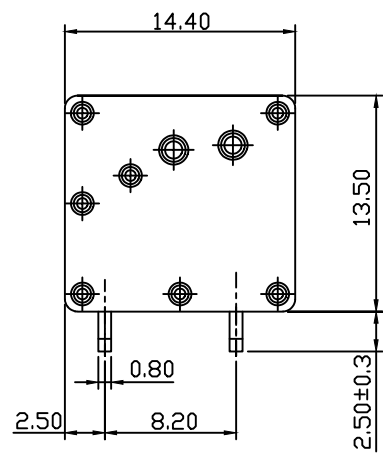

Material
Housing: PA66, UL94V-0
Contact: Copper Alloy, Sn Plated

Electrical
Operation Temperature: -40°C+105°C
Stripping Length: 9~10mm

Order Information

RHTBY62R-5.00-XXP-X

Terminal Block

Pitch: 5.00mm

No. of (01~30) Pole

Color: 1=Gray 2=Blue

3=Black 4=Green 5=Orange

6=Red 7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	20A	24A
Withstand Voltage	1600V/1min	4.0KV
Wire Range	12~24 AWG	0.2~4.0 mm ²

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

5.00 Spring Terminal Blocks	
THIRD ANGLE PROJECTION	RHTBY62R-5.00-XXP-X