



1 2 3 4 5 6 7 8 9


A

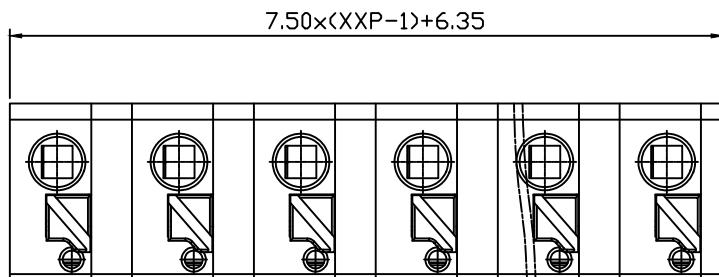


B

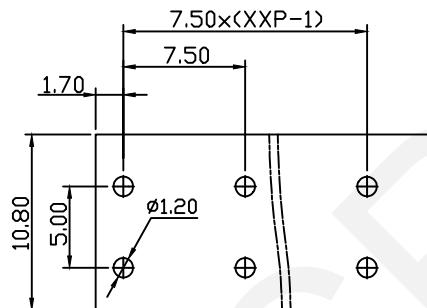

C

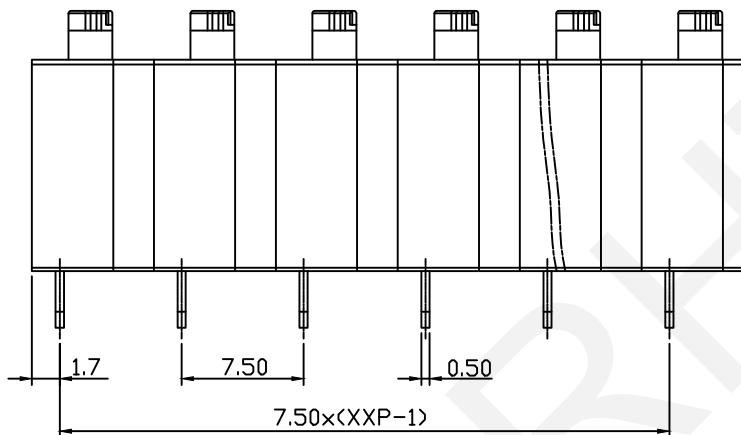

D

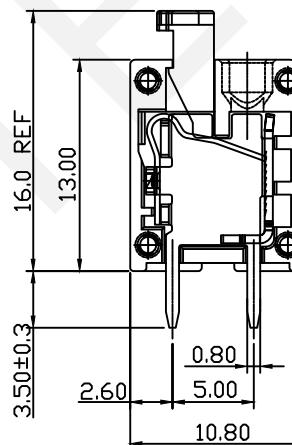

E

Recommended PCB Layout

F

Material and other:
Housing:PA66,UL94V-0
Pin Header:Brass, Tin Plated
Wire Guard:Stainless steel
Contact Resistance:20mΩ Max
Insulation Resistance:500MΩ/DC500V
Stripping Length:9~10mm
Temp.Range:-40°C+105°C

Order Information

RHTBY36-7.50-XXP-X

Terminal Block
Pitch:7.50mm
No.of(2~24)Pins
Color:1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	10A	10A
Withstand Voltage	AC2000V/1min	---
Wire Range	20~16 AWG	1.0mm ²



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

7.50 Spring Terminal Blocks



RHTBY36-7.50-XXP-X

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G