

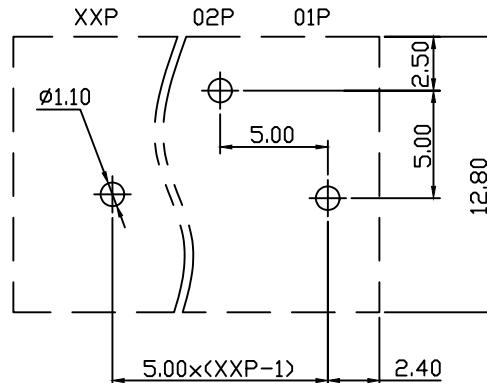
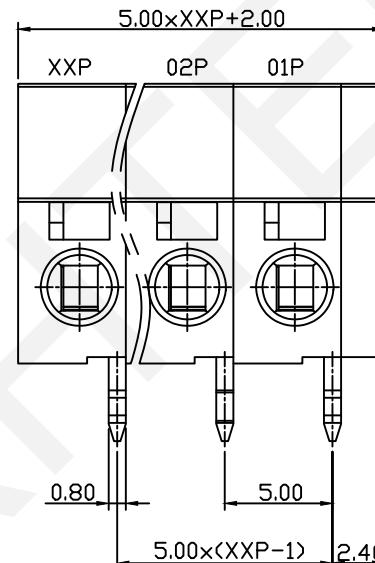


1 2 3 4 5 6 7 8 9

A

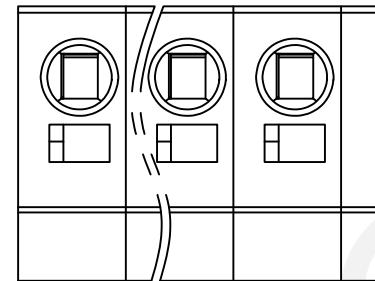

Recommended PCB Layout

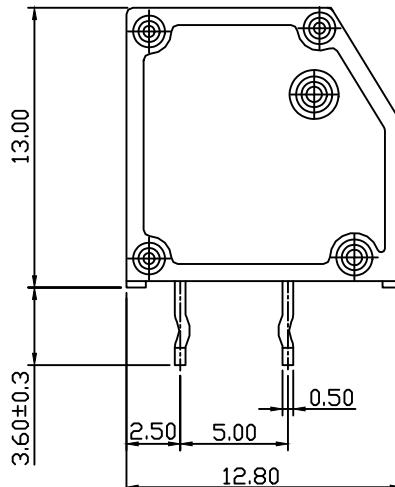

#### Material:

Housing:PA66,UL94V-0

Pin Header:Copper Alloy,Sn Plated

Strip Length:7~8mm

Temp Range:-40°C~+105°C

#### Order Information

RHTBY40-5.00-XXP-X

Terminal Block

Pitch:5.00mm

No.of(02~24)Pins

Color:1=Gray 2=Blue

3=Black 4=Green 5=Orange

6=Red 7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	320V
Rated Current	8A	17.5A
Withstand Voltage	1600V/1min	4.0KV
Wire Range	20~16 AWG	0.2~1.5mm <sup>2</sup>



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	DRWN BY PAN
±0.12	±0.15	±0.3	±0.5	CHK'D BY FENG

APP'R BY ZHAN
---------------

5.00 Spring Terminal Blocks



RHTBY40-5.00-XXP-X

1 2 3 4 5 6 7 8 9