



1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

A



A

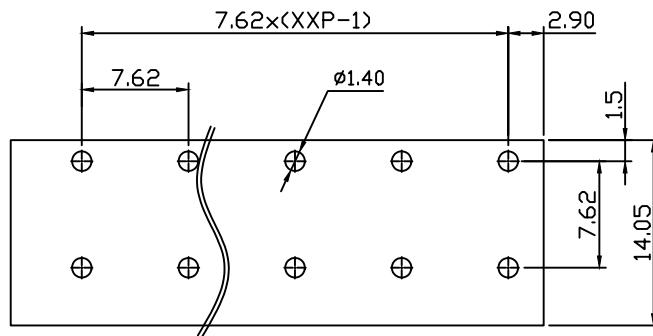

Recommended PCB Layout

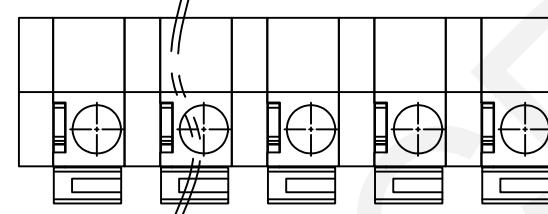


Material and other:
 Housing: PA66, UL94V-0
 Pin Header: Copper Alloy, Sn Plated
 Stripping Length: 10mm
 Operating Temperature: -40°~+105°C

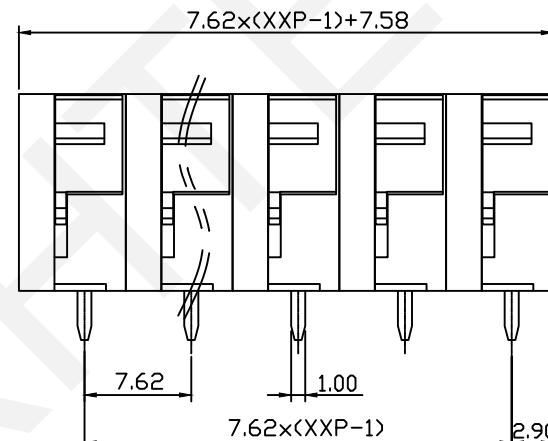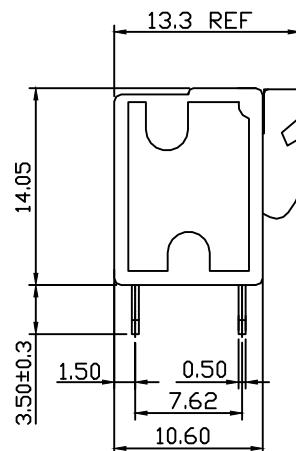

Order Information

RHTBY43V-7.62-XXP-X

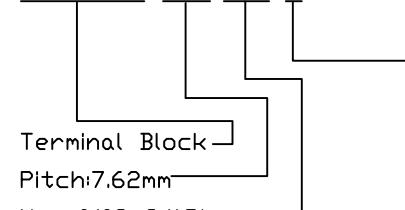

Terminal Block
 Pitch: 7.62mm
 No.of(02~24)Pins
 Color: 1=Gray 2=Blue 3=Black
 4=Green 5=Orange 6=Red
 7=Transp 8=Yellow 9=White

D

D

E

E

F

F

Electrical Characteristics	UL	IEC
Rated Voltage	300V	500V
Rated Current	10A	15A
Withstand Voltage	1600V/1min	6.0KV
Wire Range	24~14 AWG	0.2~1.5mm ²



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	APP'D BY ZHAN
±0.12	±0.15	±0.3	±0.5		

7.62 Spring Terminal Blocks



RHTBY43V-7.62-XXP-X

G

G

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---