



1 2 3 4 5 6 7 8 9


A




B

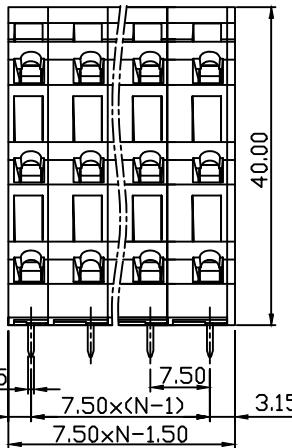

C

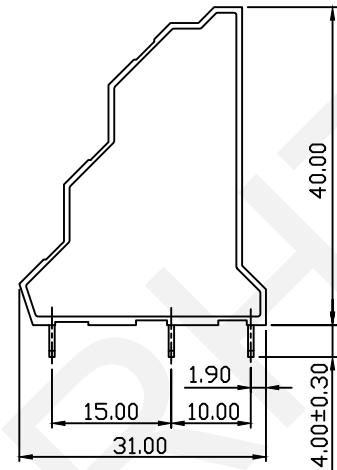

D

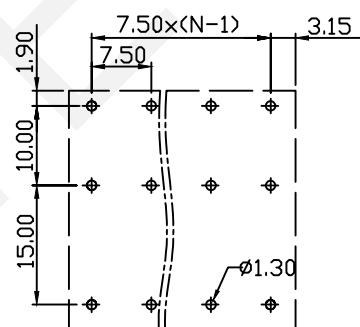

PCB Layout

E

#### Material

Housing: PA66, UL94V-0

Pin header: Brass, Tin plated

Wire Guard: Stainless steel

F

#### Electrical

Rated voltage: 300V

Rated current: 10A

Wire range: 26~14AWG 2.5mm<sup>2</sup>

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V/1min

G



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Spring Clamp Terminal Block 7.50mm



RHTBY46-7.50-XXP-1

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G