

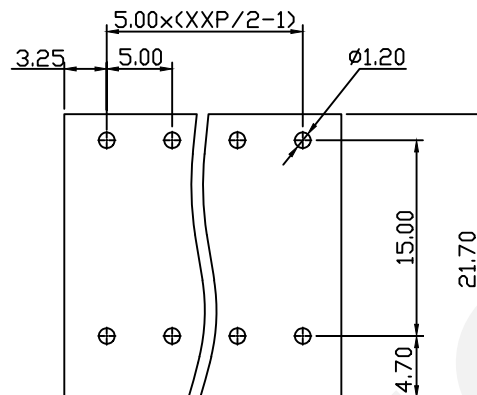
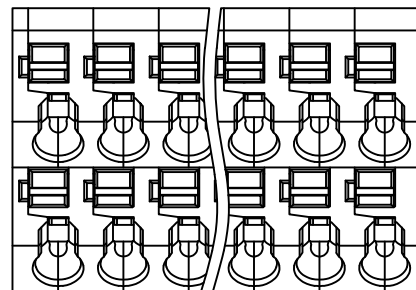


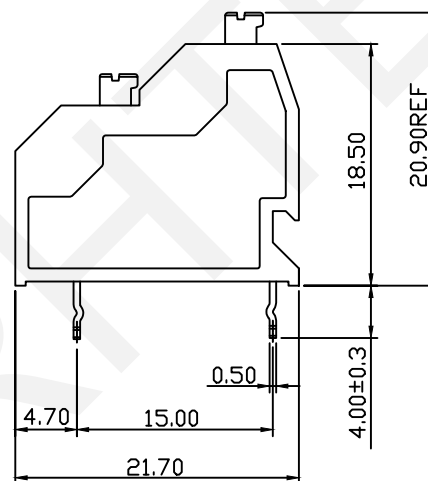

Recommended PCB Layout

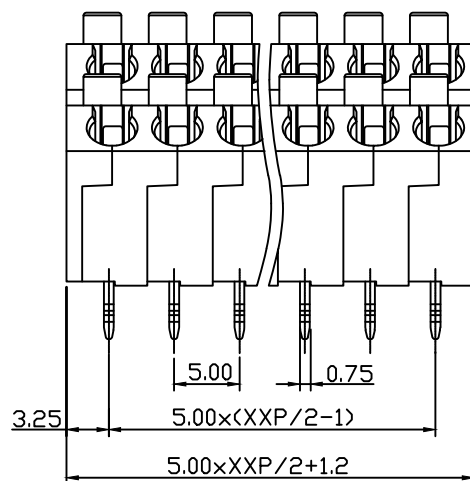

Material:
Housing:PA66,UL94V-0
Pin Header:Copper Alloy,Sn Plated
Strip Length:9~10mm
Temp Range:-40°C~+105°C

Order Information

RHTBY5.00V-5.00-XXP-X

Terminal Block

Pitch:5.00mm

No.:of(04~60)Pins

Color:1=Gray 2=Blue

3=Black 4=Green 5=Orange

6=Red 7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	320V
Rated Current	10A	17.5A
Withstand Voltage	1600V/1min	4.0KV
Wire Range	20~16 AWG	0.2~1.5mm ²


RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

5.00 Spring Terminal Blocks

THIRD ANGLE PROJECTION



RHTBY5.00V-15.0-XXP-X