

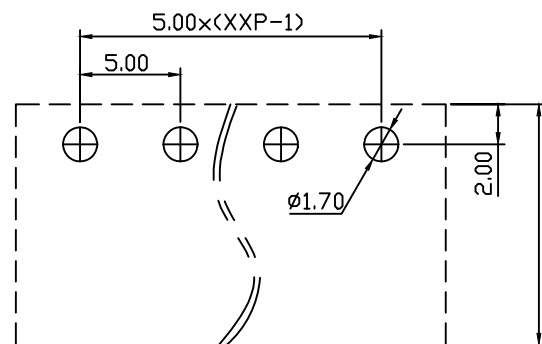
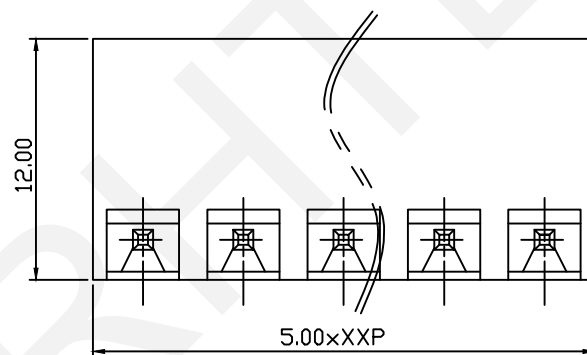


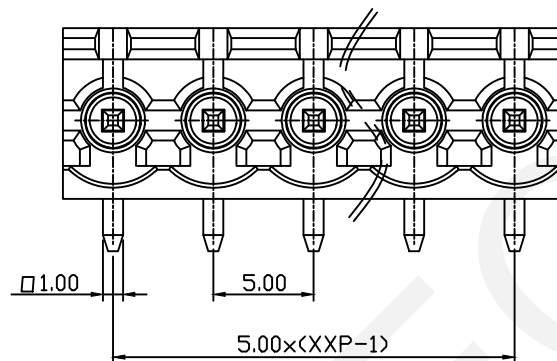

Recommended PCB Layout

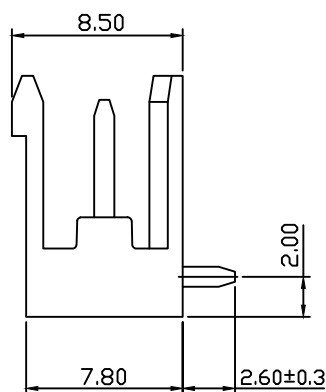

Material and other:
Housing: LCP, UL94V-0
Pin Header: Copper Alloy, Sn Plated
Operating Temperature: -40°~+130°C

Order Information

RHTBYHREDR-5.00-XXP-X

Terminal Block

Pitch: 5.00mm

No. of (02~24) Pins

Color: 1=Gray 2=Blue 3=Black

4=Green 5=Orange 6=Red

7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	15A	12A
Withstand Voltage	1600V/1min	4KV

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 5.00mm Pluggable Terminal Block,Socket

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTBYHREDR-5.00-XXP-X

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

