
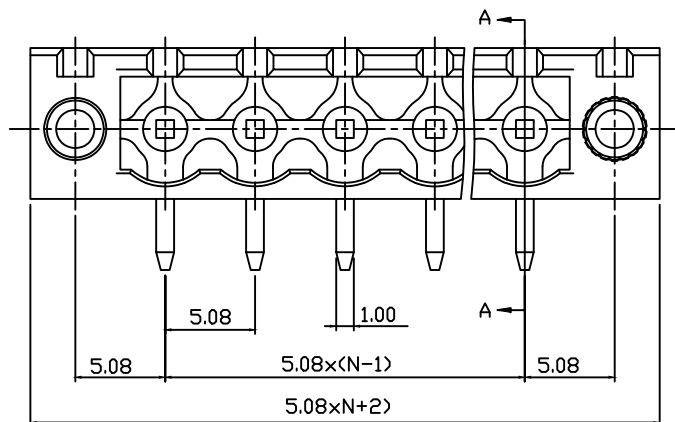


PCB Layout

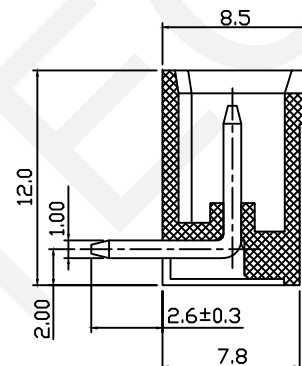

SECTION A-A

#### Material

Nut:M2.5,Brass

Pin header:Brass , Tin plated

Housing:LCP,UL94V-0,Black

#### Electrical

Rated voltage:300V

Rated current:15A

Contact Resistance:20mΩ

Insulation resistance:500MΩ/DC500V

Withstand voltage:AC2000V/1min

#### Mechanical

Temp.Range:-40°C+130°C

Soldering:285°C±5°C for 10S

#### Order information

RHTBYTHREDRM-5.08-XXP-S XX

Terminal Block

Pitch

No. of Pole

Product Lode:00~99

Screw:S-Slot Screw

C-Cross Screw

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Through hole reflow 5.08mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBYHREDRM-5.08-XXP-X


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9