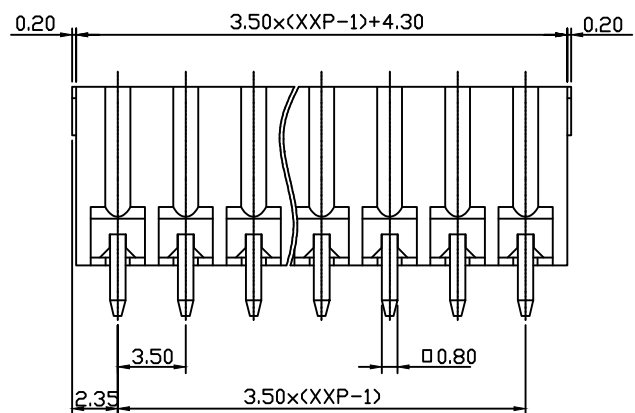


RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm

Material and other:
Housing: LCP, UL94V-0
Pin: Copper Alloy, Sn Plated
Operating Temperature: -40°C ~ +130°C
Soldering Temperature: 285°C/10S

Order Information
RHTBYHREDV-3.50-XXP-X
Terminal Block
Pitch: 3.50mm
No. of (02~24) Pins
Color: 1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	160V
Rated Current	8A	8A
Withstand Voltage	1600V/1min	2.5KV

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Pitch 3.50mm Pluggable Terminal Block, Socket

THIRD ANGLE PROJECTION

RHTBYHREDV-3.50-XXP-X