

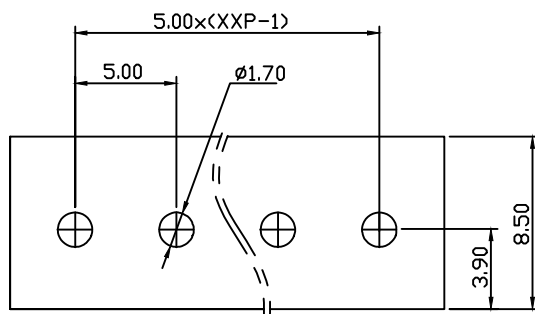
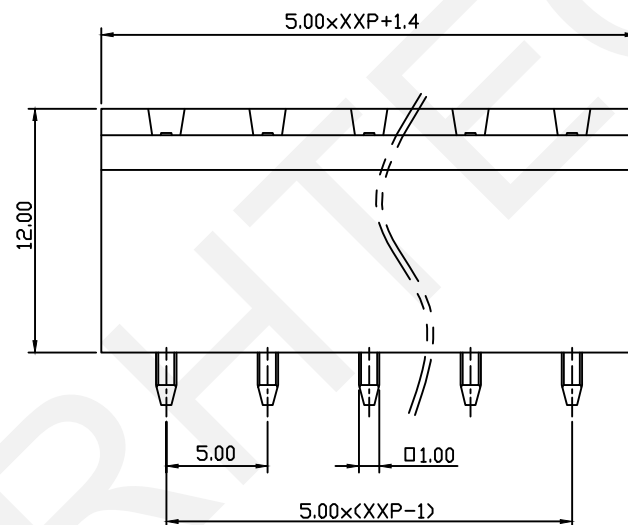


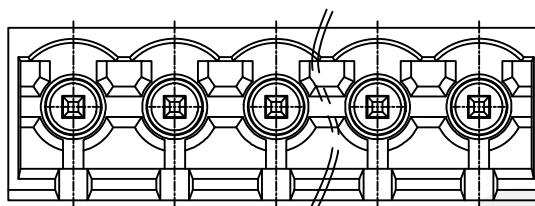

Recommended PCB Layout

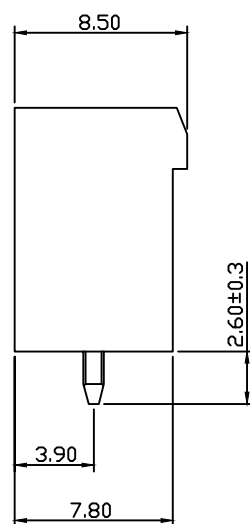

Material and other:
Housing: LCP, UL94V-0
Pin: Copper Alloy, Sn Plated
Operating Temperature: -40°C ~ +130°C

Order Information
RHTBYHREDVC-5.00-XXP-X

Terminal Block
Pitch: 5.00mm
No. of (02~24) Pins
Color: 1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	15A	12A
Withstand Voltage	1600V/1min	4.0KV

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 5.00mm Pluggable Terminal Block,Socket

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBYHREDVC-5.00-XXP-X

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4


5

6




7

8

9

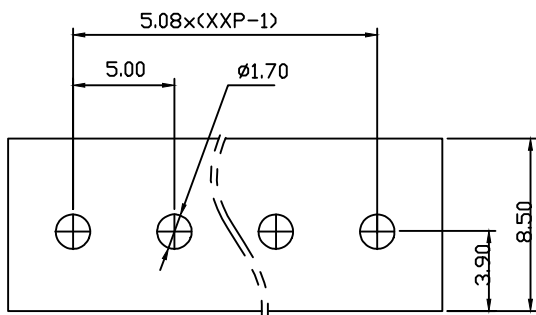

Recommended PCB Layout

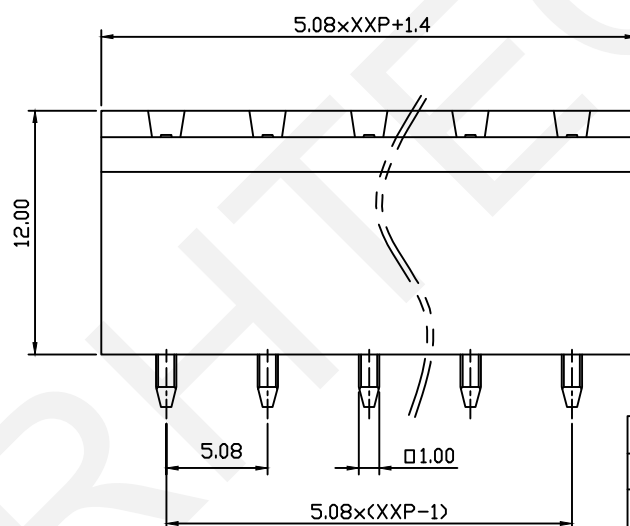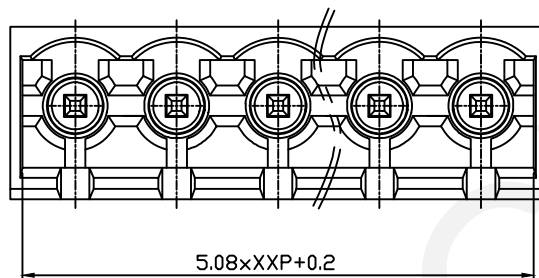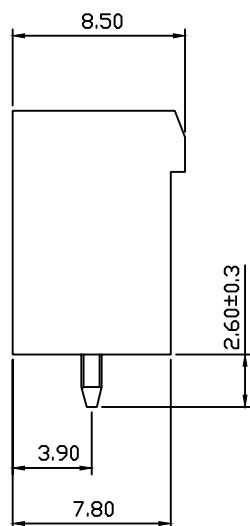

Material and other:
Housing: LCP, UL94V-0
Pin: Copper Alloy, Sn Plated
Operating Temperature: -40°C ~ +130°C
Soldering Temperature: 285°C/10S

Order Information
RHTBYHREDVC-5.08-XXP-X

Terminal Block —
Pitch: 5.08mm —
No. of (02~24) Pins —
Color: 1=Gray 2=Blue 3=Black —
4=Green 5=Orange 6=Red —
7=Transp 8=Yellow 9=White


Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	15A	12A
Withstand Voltage	1600V/1min	4.0KV

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Pitch 5.08mm Pluggable Terminal Block, Socket



RHTBYHREDVC-5.08-XXP-X