
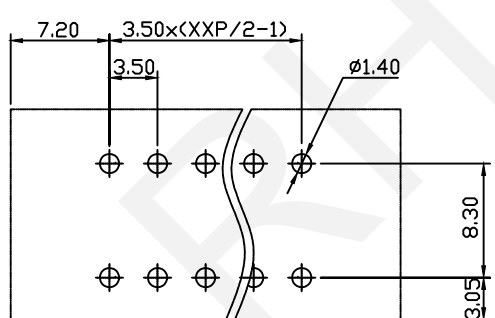

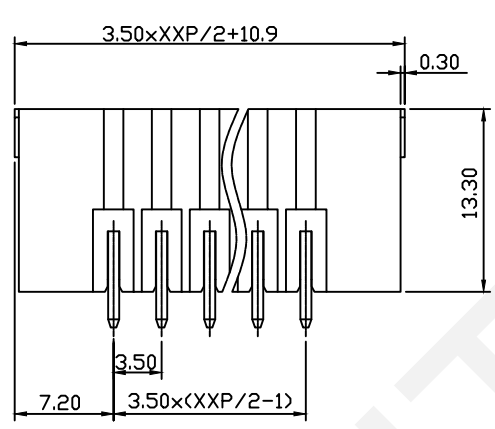



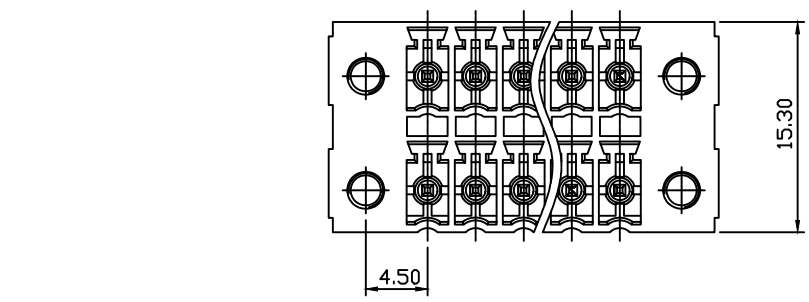


Recommended PCB Layout

Material and other:
Housing:PA66,UL94V-0
Pin:Copy Alloy,Sn Plated
Operating Temperature:-40°C~+105°C

Order Information

RHTBYHREDVHM-3.50-XXP-3

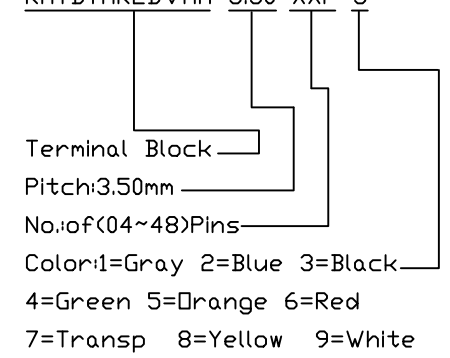

Electrical Characteristics	UL	IEC
Rated Voltage	300V	160V
Rated Current	8A	8A
Withstand Voltage	AC1600V/1min	2.5KV