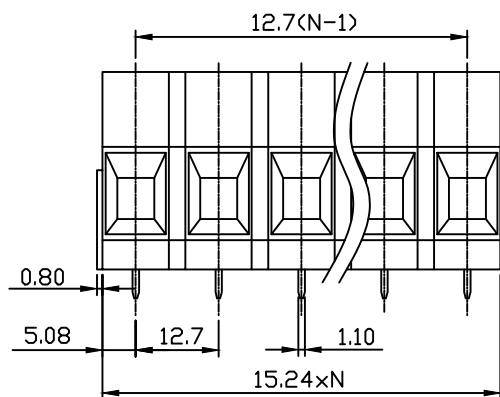
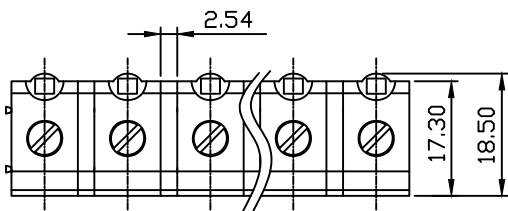


PCB LAYOUT

Material

Screw:M4.0, Steel,Zn plated
Shrapnel:Brass,Nickel plated
Pin header: Brass,Tin plated
Housing:PA66, UL94V-0,Green

Electrical

Rated voltage:300V
Rated current: 60A
Wire range:20~6AWG 10mm²
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2500V/1min

Mechanical

Temp.Range: -40℃~+105℃
Soldering: 250℃ 5Sec Max
Torque: 1.2 N.m (10.5Lb. in)
Strip length: 9~10mm

Order Information

RHTBY16-12.7-XXP-4 S XX

Terminal Block

Pitch

No.of Pole

Color:4-Green

Screw: S-Slot Screw

Product Code: 00~99



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Screw Conn Term Block 12.7mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTBY16-12.7-XXP-4S