
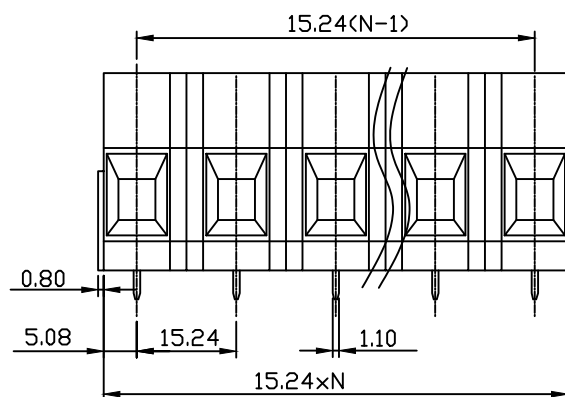
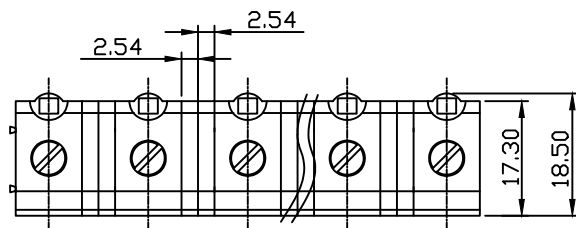


PCB LAYOUT



Material

Screw:M4.0, Steel,Zn plated

Shrapnel:Brass,Nickel plated

Pin header: Brass,Tin plated

Housing:PA66, UL94V-0,Green

Electrical

Rated voltage:300V

Rated current: 60A

Wire range:20~6AWG 10mm²

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2500V/1min

Mechanical

Temp.Range: -40℃~+105℃

Soldering: 250℃ 5Sec Max

Torque: 1.2 N.m (10.5Lb. in)

Strip length: 9~10mm

Order Information

RHTBY16-15.24-XXP-4 S XX

Terminal Block

Pitch

No.of Pole

Color:4-Green

Screw: S-Slot Screw

Product Code: 00~99



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Screw Conn Term Block 15.24mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBY16-15.24-XXP-4S


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9